
DataRobot Python API Documentation

Release 3.1.1b0

DataRobot, Inc.

Mar 13, 2023

Contents

1	Getting started	3
2	Table of contents	5
2.1	Getting started	5
2.2	User Guide	5
2.3	API Reference	151
2.4	Examples	595
2.5	Changelog	595
	Python Module Index	651
	Index	653

The DataRobot Python package is a client library for working with the DataRobot platform API. To access other clients and additional information about DataRobot's APIs, visit the [API documentation home](#).

CHAPTER 1

Getting started

To get started with the Python client, reference [DataRobot's API Quickstart guide](#).

2.1 Getting started

To get started with the Python client, reference [DataRobot's API Quickstart guide](#). This guide outlines how to configure your environment to use the API.

Additionally, try a [sample problem](#) that contains Python code examples.

2.2 User Guide

2.2.1 Data

Data integrity and quality are cornerstones for creating highly accurate predictive models. These sections describe the tools and visualizations DataRobot provides to ensure that your project doesn't suffer the "garbage in, garbage out" outcome.

Datasets

To create a DataRobot project and begin modeling, you first need to upload your data and prepare a dataset.

Create a dataset

There are several ways to create a dataset. `Dataset.upload` takes either a path to a local file, a streamable file object via external URL, or a pandas DataFrame.

```
>>> import datarobot as dr
>>> # Upload a local file
>>> dataset_one = dr.Dataset.upload("./data/examples.csv")
```

(continues on next page)

(continued from previous page)

```
>>> # Create a dataset with a URL
>>> dataset_two = dr.Dataset.upload("https://raw.githubusercontent.com/curran/data/gh-
↳pages/dbpedia/cities/data.csv")

>>> # Create a dataset using a pandas DataFrame
>>> dataset_three = dr.Dataset.upload(my_df)

>>> # Create a dataset using a local file
>>> with open("./data/examples.csv", "rb") as file_pointer:
...     dataset_four = dr.Dataset.create_from_file(filelike=file_pointer)
```

`Dataset.create_from_file` can take either a path to a local file or any streamable file object.

```
>>> import datarobot as dr
>>> dataset = dr.Dataset.create_from_file(file_path='data_dir/my_data.csv')
>>> with open('data_dir/my_data.csv', 'rb') as f:
...     other_dataset = dr.Dataset.create_from_file(filelike=f)
```

`Dataset.create_from_in_memory_data` takes either a `pandas.DataFrame` or a list of dictionaries representing rows of data. Note that the dictionaries representing the rows of data must contain the same keys.

```
>>> import pandas as pd
>>> data_frame = pd.read_csv('data_dir/my_data.csv')

>>> pandas_dataset = dr.Dataset.create_from_in_memory_data(data_frame=data_frame)

>>> in_memory_data = [{'key1': 'value', 'key2': 'other_value', ...},
...                   {'key1': 'new_value', 'key2': 'other_new_value', ...}, ...]
>>> in_memory_dataset = dr.Dataset.create_from_in_memory_data(records=other_data)
```

`Dataset.create_from_url` takes `.csv` data from a URL. If you have set `DISABLE_CREATE_SNAPSHOT_DATASOURCE`, you must set `do_snapshot=False`.

```
>>> url_dataset = dr.Dataset.create_from_url('https://s3.amazonaws.com/my_data/my_
↳dataset.csv',
...                                         do_snapshot=False)
```

`Dataset.create_from_data_source` takes data from a data source. If you have set `DISABLE_CREATE_SNAPSHOT_DATASOURCE`, you must set `do_snapshot=False`.

```
>>> data_source_dataset = dr.Dataset.create_from_data_source(data_source.id, do_
↳snapshot=False)
```

or

```
>>> data_source_dataset = data_source.create_dataset(do_snapshot=False)
```

Use datasets

After creating a dataset, you can create *Projects* from it and begin training models. You can also combine project creation and a dataset upload in one method using `Project.create`. However, using this method means the data is only accessible to the project which created it.

```
>>> project = dataset.create_project(project_name='New Project')
>>> project.analyze_and_model('some target')
Project(New Project)
```

Get information from a dataset

The dataset object contains some basic information that you can query, as shown in the snippet below.

```
>>> dataset.id
u'5e31cdac39782d0f65842518'
>>> dataset.name
u'my_data.csv'
>>> dataset.categories
["TRAINING", "PREDICTION"]
>>> dataset.created_at
datetime.datetime(2020, 2, 7, 16, 51, 10, 311000, tzinfo=tzutc())
```

The snippet below outlines several methods available to retrieve details from a dataset.

```
# Details
>>> details = dataset.get_details()
>>> details.last_modification_date
datetime.datetime(2020, 2, 7, 16, 51, 10, 311000, tzinfo=tzutc())
>>> details.feature_count_by_type
[FeatureTypeCount(count=1, feature_type=u'Text'),
 FeatureTypeCount(count=1, feature_type=u'Boolean'),
 FeatureTypeCount(count=16, feature_type=u'Numeric'),
 FeatureTypeCount(count=3, feature_type=u'Categorical')]
>>> details.to_dataset().id == details.dataset_id
True

# Projects
>>> dr.Project.create_from_dataset(dataset.id, project_name='Project One')
Project(Project One)
>>> dr.Project.create_from_dataset(dataset.id, project_name='Project Two')
Project(Project Two)
>>> dataset.get_projects()
[ProjectLocation(url=u'https://app.datarobot.com/api/v2/projects/
↪5e3c94aff86f2d10692497b5/', id=u'5e3c94aff86f2d10692497b5'),
 ProjectLocation(url=u'https://app.datarobot.com/api/v2/projects/
↪5e3c94eb9525d010a9918ec1/', id=u'5e3c94eb9525d010a9918ec1')]
>>> first_id = dataset.get_projects()[0].id
>>> dr.Project.get(first_id).project_name
'Project One'

# Features
>>> all_features = dataset.get_all_features()
>>> feature = next(dataset.iterate_all_features(offset=2, limit=1))
>>> feature.name == all_features[2].name
True
>>> print(feature.name, feature.feature_type, feature.dataset_id)
(u'Partition', u'Numeric', u'5e31cdac39782d0f65842518')
>>> feature.get_histogram().plot
[{'count': 3522, 'target': None, 'label': u'0.0'},
 {'count': 3521, 'target': None, 'label': u'1.0'}, ... ]
```

(continues on next page)

(continued from previous page)

```
# The raw data
>>> with open('myfile.csv', 'wb') as f:
...     dataset.get_file(filelike=f)
```

Retrieve datasets

You can retrieve specific datasets, a list of all datasets, or an iterator that retrieves all or some datasets.

```
>>> dataset_id = '5e387c501a438646ed7bf0f2'
>>> dataset = dr.Dataset.get(dataset_id)
>>> dataset.id == dataset_id
True
# A blocking call that returns all datasets
>>> dr.Dataset.list()
[Dataset(name='Untitled Dataset', id='5e3c51e0f86f2d1087249728'),
 Dataset(name='my_data.csv', id='5e3c2028162e6a5fe9a0d678'), ...]

# Avoid listing datasets that fail to properly upload
>>> dr.Dataset.list(filter_failed=True)
[Dataset(name='my_data.csv', id='5e3c2028162e6a5fe9a0d678'),
 Dataset(name='my_other_data.csv', id='3efc2428g62eaa5f39a6dg7a'), ...]

# An iterator that lazily retrieves from the server page-by-page
>>> from itertools import islice
>>> iterator = dr.Dataset.iterate(offset=2)
>>> for element in islice(iterator, 3):
...     print(element)
Dataset(name='some_data.csv', id='5e8df2f21a438656e7a23d12')
Dataset(name='other_data.csv', id='5e8df2e31a438656e7a23d0b')
Dataset(name='Untitled Dataset', id='5e6127681a438666cc73c2b0')
```

Manage datasets

You can modify, delete and restore datasets. Note that you need the dataset's ID in order to restore it from deletion. If you do not keep track of the ID, you will be unable to restore a dataset. If your deleted dataset was used to create a project, that project can still access it, but you will not be able to create new projects using that dataset.

```
>>> dataset.modify(name='A Better Name')
>>> dataset.name
'A Better Name'

>>> new_project = dr.Project.create_from_dataset(dataset.id)
>>> stored_id = dataset.id
>>> dr.Dataset.delete(dataset.id)

# new_project is still ok
>>> dr.Project.create_from_dataset(stored_id)
Traceback (most recent call last):
...
datarobot.errors.ClientError: 410 client error: {'message': 'Requested Dataset_
↪5e31cdac39782d0f65842518 was previously deleted.'}
```

(continues on next page)

(continued from previous page)

```
>>> dr.Dataset.un_delete(stored_id)
>>> dr.Project.create_from_dataset(stored_id, project_name='Successful')
Project (Successful)
```

You can share a dataset as demonstrated in the following code snippet.

```
>>> from datarobot.enums import SHARING_ROLE
>>> from datarobot.models.dataset import Dataset
>>> from datarobot.models.sharing import SharingAccess
>>>
>>> new_access = SharingAccess(
>>>     "new_user@datarobot.com",
>>>     SHARING_ROLE.OWNER,
>>>     can_share=True,
>>> )
>>> access_list = [
>>>     SharingAccess("old_user@datarobot.com", SHARING_ROLE.OWNER, can_share=True),
>>>     new_access,
>>> ]
>>>
>>> Dataset.get('my-dataset-id').share(access_list)
```

Manage dataset feature lists

You can create, modify, and delete custom feature lists on a given dataset. Some feature lists are automatically created by DataRobot and cannot be modified or deleted. Note that you cannot restore a deleted feature list.

```
>>> dataset.get_featurelists()
[DatasetFeaturelist(Raw Features),
 DatasetFeaturelist(universe),
 DatasetFeaturelist(Informative Features)]

>>> dataset_features = [feature.name for feature in dataset.get_all_features()]
>>> custom_featurelist = dataset.create_featurelist('Custom Features', dataset_
↳ features[:5])
>>> custom_featurelist
DatasetFeaturelist(Custom Features)

>>> dataset.get_featurelists()
[DatasetFeaturelist(Raw Features),
 DatasetFeaturelist(universe),
 DatasetFeaturelist(Informative Features),
 DatasetFeaturelist(Custom Features)]

>>> custom_featurelist.update('New Name')
>>> custom_featurelist.name
'New Name'

>>> custom_featurelist.delete()
>>> dataset.get_featurelists()
[DatasetFeaturelist(Raw Features),
 DatasetFeaturelist(universe),
 DatasetFeaturelist(Informative Features)]
```

Use credential data

For methods that accept credential data instead of username and password or a credential ID, see *Credential Data*.

Database Connectivity

Databases are a widely used tool for carrying valuable business data. To enable integration with a variety of enterprise databases, DataRobot provides a “self-service” JDBC product for database connectivity setup. Once configured, you can read data from production databases for model building and predictions. This allows you to quickly train and retrain models on that data, and avoids the unnecessary step of exporting data from your enterprise database to a CSV for ingest to DataRobot. It allows access to more diverse data, which results in more accurate models.

The steps describing how to set up your database connections use the following terminology:

- **DataStore**: A configured connection to a database. It has a name, a specified driver, and a JDBC URL. You can register data stores with DataRobot for ease of re-use. A data store has one connector but can have many data sources.
- **DataSource**: A configured connection to the backing data store (the location of data within a given endpoint). A data source specifies, via SQL query or selected table and schema data, which data to extract from the data store to use for modeling or predictions. A data source has one data store and one connector but can have many datasets.
- **DataDriver**: The software that allows the DataRobot application to interact with a database; each data store is associated with either a driver or a connector (created by the admin). The driver configuration saves the storage location in DataRobot of the JAR file and any additional dependency files associated with the driver.
- **Connector**: Similarly to data drivers, a connector allows the DataRobot application to interact with a database; each data store is associated with either a driver or a connector (created by the admin). The connector configuration saves the storage location in DataRobot of the JAR file and any additional dependency files associated with the connector.
- **Dataset**: Data, a file or the content of a data source, at a particular point in time. A data source can produce multiple datasets; a dataset has exactly one data source.

The expected workflow when setting up projects or prediction datasets is:

1. The administrator sets up a `datarobot.DataDriver` for accessing a particular database. For any particular driver, this setup is done once for the entire system and then the resulting driver is used by all users.
2. Users create a `datarobot.DataStore` which represents an interface to a particular database, using that driver.
3. Users create a `datarobot.DataSource` representing a particular set of data to be extracted from the DataStore.
4. Users create projects and prediction datasets from a DataSource.

Besides the described workflow for creating projects and prediction datasets, users can manage their DataStores and DataSources and admins can manage Drivers by listing, retrieving, updating and deleting existing instances.

Cloud users: This feature is turned off by default. To enable the feature, contact your CFDS or DataRobot Support.

Creating Drivers

The admin should specify `class_name`, the name of the Java class in the Java archive which implements the `java.sql.Driver` interface; `canonical_name`, a user-friendly name for resulting driver to display in the API and the GUI; and `files`, a list of local files which contain the driver.

```
>>> import datarobot as dr
>>> driver = dr.DataDriver.create(
...     class_name='org.postgresql.Driver',
...     canonical_name='PostgreSQL',
...     files=['/tmp/postgresql-42.2.2.jar']
... )
>>> driver
DataDriver('PostgreSQL')
```

To retrieve information about existing drivers, such as the driver ID for data store creation, you can use `dr.DataDriver.list()`.

Creating DataStores

After the admin has created drivers, any user can use them for `DataStore` creation. A `DataStore` represents a JDBC database. When creating them, users should specify `type`, which currently must be `jdbc`; `canonical_name`, a user-friendly name to display in the API and GUI for the `DataStore`; `driver_id`, the id of the driver to use to connect to the database; and `jdbc_url`, the full URL specifying the database connection settings like database type, server address, port, and database name.

Note that you can only create data stores with drivers when using the Python client. Drivers and connectors are not interchangeable for this method. To create a data store with a connector, instead use the REST API.

```
>>> import datarobot as dr
>>> data_store = dr.DataStore.create(
...     data_store_type='jdbc',
...     canonical_name='Demo DB',
...     driver_id='5a6af02eb15372000117c040',
...     jdbc_url='jdbc:postgresql://my.db.address.org:5432/perftest'
... )
>>> data_store
DataStore('Demo DB')
>>> data_store.test(username='username', password='password')
{'message': 'Connection successful'}
```

Creating DataSources

Once users have a `DataStore`, they can query datasets via the `DataSource` entity, which represents a query. When creating a `DataSource`, users first create a `datarobot.DataSourceParameters` object from a `DataStore`'s id and a query, and then create the `DataSource` with a `type`, currently always `jdbc`; a `canonical_name`, the user-friendly name to display in the API and GUI, and `params`, the `DataSourceParameters` object.

```
>>> import datarobot as dr
>>> params = dr.DataSourceParameters(
...     data_store_id='5a8ac90b07a57a0001be501e',
...     query='SELECT * FROM airlines10mb WHERE "Year" >= 1995;'
... )
>>> data_source = dr.DataSource.create(
...     data_source_type='jdbc',
...     canonical_name='airlines stats after 1995',
...     params=params
... )
>>> data_source
DataSource('airlines stats after 1995')
```

Creating Projects

Given a DataSource, users can create new projects from it.

```
>>> import datarobot as dr
>>> project = dr.Project.create_from_data_source(
...     data_source_id='5ae6eee9962d740dd7b86886',
...     username='username',
...     password='password'
... )
```

As of v3.0, you can alternatively pass in the *credential_id* of an existing *Dataset.Credential* object.

```
>>> import datarobot as dr
>>> project = dr.Project.create_from_data_source(
...     data_source_id='5ae6eee9962d740dd7b86886',
...     credential_id='9963d544d5ce3se783r12190'
... )
```

or, pass in *credential_data* which conforms to *CredentialDataSchema*.

```
>>> import datarobot as dr
>>> s3_credential_data = {"credentialType": "s3", "awsAccessKeyId": "key123",
... ↪ "awsSecretAccessKey": "secret123"}
>>> project = dr.Project.create_from_data_source(
...     data_source_id='5ae6eee9962d740dd7b86886',
...     credential_data=s3_credential_data
... )
```

Creating Predictions

Given a DataSource, new prediction datasets can be created for any project.

```
>>> import datarobot as dr
>>> project = dr.Project.get('5ae6f296962d740dd7b86887')
>>> prediction_dataset = project.upload_dataset_from_data_source(
...     data_source_id='5ae6eee9962d740dd7b86886',
...     username='username',
...     password='password'
... )
```

Feature Discovery

Feature Discovery allows you to generate features automatically from secondary datasets connected to a primary dataset (training data). You can create this type of connection using DataRobot's Relationships Configuration.

Register a primary dataset to start a project

To start a Feature Discovery Project, upload the primary (training) dataset: *Projects*

```
import datarobot as dr
primary_dataset = dr.Dataset.create_from_file(file_path='your-training_file.csv')
project = dr.Project.create_from_dataset(primary_dataset.id, project_name='Lending_
↪Club')
```

(continues on next page)

(continued from previous page)

Next, register all the secondary datasets which you want to connect with primary dataset.

Register secondary datasets in the AI Catalog

You can register the dataset using `Dataset.create_from_file`, which can take either a path to a local file or any streamable file object.

```
profile_dataset = dr.Dataset.create_from_file(file_path='your_profile_file.csv')
transaction_dataset = dr.Dataset.create_from_file(file_path='your_transaction_file.csv
↪')
```

Create dataset definitions and relationships using helper functions

Create the `DatasetDefinition` and `Relationship` for the profile and transaction datasets created above using helper functions.

```
profile_catalog_id = profile_dataset.id
profile_catalog_version_id = profile_dataset.version_id

transac_catalog_id = transaction_dataset.id
transac_catalog_version_id = transaction_dataset.version_id

profile_dataset_definition = dr.DatasetDefinition(
    identifier='profile',
    catalog_id=profile_catalog_id,
    catalog_version_id=profile_catalog_version_id
)

transaction_dataset_definition = dr.DatasetDefinition(
    identifier='transaction',
    catalog_id=transac_catalog_id,
    catalog_version_id=transac_catalog_version_id,
    primary_temporal_key='Date'
)

profile_transaction_relationship = dr.Relationship(
    dataset1_identifier='profile',
    dataset2_identifier='transaction',
    dataset1_keys=['CustomerID'],
    dataset2_keys=['CustomerID']
)

primary_profile_relationship = dr.Relationship(
    dataset2_identifier='profile',
    dataset1_keys=['CustomerID'],
    dataset2_keys=['CustomerID'],
    feature_derivation_window_start=-14,
    feature_derivation_window_end=-1,
    feature_derivation_window_time_unit='DAY',
    prediction_point_rounding=1,
    prediction_point_rounding_time_unit='DAY'
)
```

(continues on next page)

(continued from previous page)

```
dataset_definitions = [profile_dataset_definition, transaction_dataset_definition]
relationships = [primary_profile_relationship, profile_transaction_relationship]
```

Create a relationship configuration

Create a relationship configuration using the dataset definitions and relationships created above.

```
# Create the relationships configuration to define connection between the datasets
relationship_config = dr.RelationshipsConfiguration.create(dataset_
↳definitions=dataset_definitions, relationships=relationships)
```

Create a Feature Discovery project

Once you have configured relationships for your datasets, you can start a Feature Discovery project.

```
# Set the datetime partitioning column (`date` in this example)
partitioning_spec = dr.DatetimePartitioningSpecification('date')

# As of v3.0, use ``Project.set_datetime_partitioning`` instead of passing the spec_
↳to ``Project.analyze_and_model`` via ``partitioning_method``.
project.set_datetime_partitioning(datetime_partition_spec=partitioning_spec)

# Set the target for the project and start Feature discovery (if ``Project.set_
↳datetime_partitioning`` was used there is no need to pass ``partitioning_method``)
project.analyze_and_model(target='BadLoan', relationships_configuration_
↳id=relationship_config.id, mode='manual', partitioning_method=partitioning_spec)
Project(train.csv)
```

To start training a model, reference the [ref: modeling <model>](#) documentation.

Create secondary dataset configuration for predictions

Create configurations for your secondary datasets with *Secondary Dataset*:

```
new_secondary_dataset_config = dr.SecondaryDatasetConfigurations.create(
    project_id=project.id,
    name='My config',
    secondary_datasets=secondary_datasets
)
```

For more details, reference the [Secondary Dataset](#) configuration documentation.

Make predictions with a trained model

To make predictions with a trained model, reference the [Predictions](#) documentation.

```
dataset_from_path = project.upload_dataset(
    './data_to_predict.csv',
    secondary_datasets_config_id=new_secondary_dataset_config.id
```

(continues on next page)

(continued from previous page)

```
)
predict_job_1 = model.request_predictions(dataset_from_path.id)
```

Common Errors

Dataset registration Failed

```
datasetdr.Dataset.create_from_file(file_path='file.csv')
datarobot.errors.AsyncProcessUnsuccessfulError: The job did not complete successfully.
```

Solution

- Check the internet connectivity sometimes network flakiness cause upload error
- Is the dataset file too big then you might want to upload using URL rather than file

Relationship configuration errors

```
datarobot.errors.ClientError: 422 client error: {'message': u'Invalid field data',
'uerrors': {'datasetDefinitions': {'1': {'identifier': u'value cannot contain_
↳characters: $ - " . { } / \\'},
'u0': {'identifier': u'value cannot contain characters: $ - " . { } / \\'}}}}
```

Solution:

- Check the identifier name passed in *datasets_definitions* and relationships.
- Tip: Do not use the name of the dataset if you did not specify it when registering the dataset to the AI Catalog.

```
datarobot.errors.ClientError: 422 client error: {'message': u'Invalid field data',
'uerrors': {'datasetDefinitions': {'1': {'primaryTemporalKey': u'date column_
↳doesn't exist'},
}}}}
```

Solution:

- Check if the name of the column passed as *primaryTemporalKey* is correct, as it is case-sensitive.

Configure relationships

A relationship's configuration specifies additional datasets to be included to a project, how these datasets are related to each other, and the primary dataset. When a relationships configuration is specified for a project, Feature Discovery will create features automatically from these datasets.

You can create a relationship configuration from uploaded AI Catalog items. After uploading all the secondary datasets in the AI Catalog:

- Create the dataset's definition to specify which datasets to be used as secondary datasets along with its details
- Configure relationships among the above datasets.

```
relationship_config = dr.RelationshipsConfiguration.create(dataset_
↳definitions=dataset_definitions, relationships=relationships)
>>> relationship_config.id
u'5506fcd38bd88f5953219da0'
```

Dataset definitions and relationships using helper functions

Create the *DatasetDefinition* and *Relationship* for the profile and transaction dataset using helper functions.

```
profile_catalog_id = '5ec4aec1f072bc028e3471ae'
profile_catalog_version_id = '5ec4aec2f072bc028e3471b1'

transac_catalog_id = '5ec4aec268f0f30289a03901'
transac_catalog_version_id = '5ec4aec268f0f30289a03900'

profile_dataset_definition = dr.DatasetDefinition(
    identifier='profile',
    catalog_id=profile_catalog_id,
    catalog_version_id=profile_catalog_version_id
)

transaction_dataset_definition = dr.DatasetDefinition(
    identifier='transaction',
    catalog_id=transac_catalog_id,
    catalog_version_id=transac_catalog_version_id,
    primary_temporal_key='Date'
)

profile_transaction_relationship = dr.Relationship(
    dataset1_identifier='profile',
    dataset2_identifier='transaction',
    dataset1_keys=['CustomerID'],
    dataset2_keys=['CustomerID']
)

primary_profile_relationship = dr.Relationship(
    dataset2_identifier='profile',
    dataset1_keys=['CustomerID'],
    dataset2_keys=['CustomerID'],
    feature_derivation_window_start=-14,
    feature_derivation_window_end=-1,
    feature_derivation_window_time_unit='DAY',
    prediction_point_rounding=1,
    prediction_point_rounding_time_unit='DAY'
)

dataset_definitions = [profile_dataset_definition, transaction_dataset_definition]
relationships = [primary_profile_relationship, profile_transaction_relationship]
```

Dataset definition and relationship using a dictionary

Create the dataset definitions and relationships for the profile and transaction dataset using dict directly.

```

profile_catalog_id = profile_dataset.id
profile_catalog_version_id = profile_dataset.version_id

transac_catalog_id = transaction_dataset.id
transac_catalog_version_id = transaction_dataset.version_id

dataset_definitions = [
    {
        'identifier': 'transaction',
        'catalogVersionId': transac_catalog_version_id,
        'catalogId': transac_catalog_id,
        'primaryTemporalKey': 'Date',
        'snapshotPolicy': 'latest',
    },
    {
        'identifier': 'profile',
        'catalogId': profile_catalog_id,
        'catalogVersionId': profile_catalog_version_id,
        'snapshotPolicy': 'latest',
    },
]

relationships = [
    {
        'dataset2Identifier': 'profile',
        'dataset1Keys': ['CustomerID'],
        'dataset2Keys': ['CustomerID'],
        'featureDerivationWindowStart': -14,
        'featureDerivationWindowEnd': -1,
        'featureDerivationWindowTimeUnit': 'DAY',
        'predictionPointRounding': 1,
        'predictionPointRoundingTimeUnit': 'DAY',
    },
    {
        'dataset1Identifier': 'profile',
        'dataset2Identifier': 'transaction',
        'dataset1Keys': ['CustomerID'],
        'dataset2Keys': ['CustomerID'],
    },
]

```

Retrieving relationship configuration

You can retrieve a specific relationship's configuration using the ID of the relationship configuration.

```

relationship_config_id = '5506fcd38bd88f5953219da0'
relationship_config = dr.RelationshipsConfiguration(id=relationship_config_id).get()
>>> relationship_config.id == relationship_config_id
True
# Get all the datasets used in this relationship's configuration
>> len(relationship_config.dataset_definitions) == 2
True
>> relationship_config.dataset_definitions[0]
{
    'feature_list_id': '5ec4af93603f596525d382d3',

```

(continues on next page)

(continued from previous page)

```

'snapshot_policy': 'latest',
'catalog_id': '5ec4aec268f0f30289a03900',
'catalog_version_id': '5ec4aec268f0f30289a03901',
'primary_temporal_key': 'Date',
'is_deleted': False,
'identifier': 'transaction',
'feature_lists':
  [
    {
      'name': 'Raw Features',
      'description': 'System created featurelist',
      'created_by': 'User1',
      'creation_date': datetime.datetime(2020, 5, 20, 4, 18, 27, 150000,
↳tzinfo=tzutc()),
      'user_created': False,
      'dataset_id': '5ec4aec268f0f30289a03900',
      'id': '5ec4af93603f596525d382d1',
      'features': [u'CustomerID', u'AccountID', u'Date', u'Amount', u
↳'Description']
    },
    {
      'name': 'universe',
      'description': 'System created featurelist',
      'created_by': 'User1',
      'creation_date': datetime.datetime(2020, 5, 20, 4, 18, 27, 172000,
↳tzinfo=tzutc()),
      'user_created': False,
      'dataset_id': '5ec4aec268f0f30289a03900',
      'id': '5ec4af93603f596525d382d2',
      'features': [u'CustomerID', u'AccountID', u'Date', u'Amount', u
↳'Description']
    },
    {
      'features': [u'CustomerID', u'AccountID', u'Date', u'Amount', u
↳'Description'],
      'description': 'System created featurelist',
      'created_by': u'Garvit Bansal',
      'creation_date': datetime.datetime(2020, 5, 20, 4, 18, 27, 179000,
↳tzinfo=tzutc()),
      'dataset_version_id': '5ec4aec268f0f30289a03901',
      'user_created': False,
      'dataset_id': '5ec4aec268f0f30289a03900',
      'id': u'5ec4af93603f596525d382d3',
      'name': 'Informative Features'
    }
  ]
}
# Get information regarding how the datasets are connected among themselves as well
↳as theprimary dataset
>> relationship_config.relationships
[
  {
    'dataset2Identifier': 'profile',
    'dataset1Keys': ['CustomerID'],
    'dataset2Keys': ['CustomerID'],
    'featureDerivationWindowStart': -14,
    'featureDerivationWindowEnd': -1,

```

(continues on next page)

(continued from previous page)

```

    'featureDerivationWindowTimeUnit': 'DAY',
    'predictionPointRounding': 1,
    'predictionPointRoundingTimeUnit': 'DAY',
  },
  {
    'dataset1Identifier': 'profile',
    'dataset2Identifier': 'transaction',
    'dataset1Keys': ['CustomerID'],
    'dataset2Keys': ['CustomerID'],
  },
]

```

Update details of a relationship configuration

Use the snippet below as an example of how to update the details of the existing relationship configuration.

```

relationship_config_id = '5506fcd38bd88f5953219da0'
relationship_config = dr.RelationshipsConfiguration(id=relationship_config_id)
# Remove obsolete dataset definitions and its relationships
new_datasets_definiton =
[
  {
    'identifier': 'user',
    'catalogVersionId': '5c88a37770fc42a2fcc62759',
    'catalogId': '5c88a37770fc42a2fcc62759',
    'snapshotPolicy': 'latest',
  },
]

# Get information regarding how the datasets are connected among themselves as well_
↳as the primary dataset
new_relationships =
[
  {
    'dataset2Identifier': 'user',
    'dataset1Keys': ['user_id', 'dept_id'],
    'dataset2Keys': ['user_id', 'dept_id'],
  },
]
new_config = relationship_config.replace(new_datasets_definiton, new_relationships)
>>> new_config.id == relationship_config_id
True
>>> new_config.datasets_definition
[
  {
    'identifier': 'user',
    'catalogVersionId': '5c88a37770fc42a2fcc62759',
    'catalogId': '5c88a37770fc42a2fcc62759',
    'snapshotPolicy': 'latest',
  },
]
>>> new_config.relationships
[
  {
    'dataset2Identifier': 'user',

```

(continues on next page)

(continued from previous page)

```
'dataset1Keys': ['user_id', 'dept_id'],
'dataset2Keys': ['user_id', 'dept_id'],
},
]
```

Delete relationships configuration

You can delete a relationship configuration that is not used by any project.

```
relationship_config_id = '5506fcd38bd88f5953219da0'
relationship_config = dr.RelationshipsConfiguration(id=relationship_config_id)
result = relationship_config.get()
>>> result.id == relationship_config_id
True
# Delete the relationships configuration
>>> relationship_config.delete()
>>> relationship_config.get()
ClientError: Relationships Configuration 5506fcd38bd88f5953219da0 not found
```

Secondary dataset configuration

Secondary dataset configuration allows you to use the different secondary datasets for a Feature Discovery project when making predictions.

Secondary datasets using helper functions

Create the *Secondary Dataset* using helper functions.

```
>>> profile_catalog_id = '5ec4aec1f072bc028e3471ae'
>>> profile_catalog_version_id = '5ec4aec2f072bc028e3471b1'

>>> transac_catalog_id = '5ec4aec268f0f30289a03901'
>>> transac_catalog_version_id = '5ec4aec268f0f30289a03900'

profile_secondary_dataset = dr.SecondaryDataset(
    identifier='profile',
    catalog_id=profile_catalog_id,
    catalog_version_id=profile_catalog_version_id,
    snapshot_policy='latest'
)

transaction_secondary_dataset = dr.SecondaryDataset(
    identifier='transaction',
    catalog_id=transac_catalog_id,
    catalog_version_id=transac_catalog_version_id,
    snapshot_policy='latest'
)

secondary_datasets = [profile_secondary_dataset, transaction_secondary_dataset]
```

Create secondary datasets with dict

You can create secondary datasets using raw dict structure.

```
secondary_datasets = [
    {
        'snapshot_policy': u'latest',
        'identifier': u'profile',
        'catalog_version_id': u'5fd06b4af24c641b68e4d88f',
        'catalog_id': u'5fd06b4af24c641b68e4d88e'
    },
    {
        'snapshot_policy': u'dynamic',
        'identifier': u'transaction',
        'catalog_version_id': u'5fd1e86c589238a4e635e98e',
        'catalog_id': u'5fd1e86c589238a4e635e98d'
    }
]
```

Create a secondary dataset configuration

Create a secondary dataset configuration for a Feature Discovery Project which uses two secondary datasets: *profile* and *transaction*.

```
import datarobot as dr
project = dr.Project.get(project_id='54e639a18bd88f08078ca831')

new_secondary_dataset_config = dr.SecondaryDatasetConfigurations.create(
    project_id=project.id,
    name='My config',
    secondary_datasets=secondary_datasets
)

>>> new_secondary_dataset_config.id
'5fd1e86c589238a4e635e93d'
```

Retrieve a secondary dataset configuration

You can retrieve specific secondary dataset configurations using the configuration ID.

```
>>> config_id = '5fd1e86c589238a4e635e93d'

secondary_dataset_config = dr.SecondaryDatasetConfigurations(id=config_id).get()
>>> secondary_dataset_config.id == config_id
True
>>> secondary_dataset_config
{
    'created': datetime.datetime(2020, 12, 9, 6, 16, 22, tzinfo=tzutc()),
    'creator_full_name': u'abc@datarobot.com',
    'creator_user_id': u'asdf4af1gf4bdsd2fba1de0a',
    'credential_ids': None,
    'featurelist_id': None,
    'id': u'5fd1e86c589238a4e635e93d',
```

(continues on next page)

(continued from previous page)

```

    'is_default': True,
    'name': u'My config',
    'project_id': u'5fd06afce2456ec1e9d20457',
    'project_version': None,
    'secondary_datasets': [
        {
            'snapshot_policy': u'latest',
            'identifier': u'profile',
            'catalog_version_id': u'5fd06b4af24c641b68e4d88f',
            'catalog_id': u'5fd06b4af24c641b68e4d88e'
        },
        {
            'snapshot_policy': u'dynamic',
            'identifier': u'transaction',
            'catalog_version_id': u'5fd1e86c589238a4e635e98e',
            'catalog_id': u'5fd1e86c589238a4e635e98d'
        }
    ]
}

```

List all secondary dataset configurations

You can list all secondary dataset configurations created in the project.

```

>>> secondary_dataset_configs = dr.SecondaryDatasetConfigurations.list(project.id)
>>> secondary_dataset_configs[0]
{
    'created': datetime.datetime(2020, 12, 9, 6, 16, 22, tzinfo=tzutc()),
    'creator_full_name': u'abc@datarobot.com',
    'creator_user_id': u'asdf4af1gf4bdsd2fbalde0a',
    'credential_ids': None,
    'featurelist_id': None,
    'id': u'5fd1e86c589238a4e635e93d',
    'is_default': True,
    'name': u'My config',
    'project_id': u'5fd06afce2456ec1e9d20457',
    'project_version': None,
    'secondary_datasets': [
        {
            'snapshot_policy': u'latest',
            'identifier': u'profile',
            'catalog_version_id': u'5fd06b4af24c641b68e4d88f',
            'catalog_id': u'5fd06b4af24c641b68e4d88e'
        },
        {
            'snapshot_policy': u'dynamic',
            'identifier': u'transaction',
            'catalog_version_id': u'5fd1e86c589238a4e635e98e',
            'catalog_id': u'5fd1e86c589238a4e635e98d'
        }
    ]
}

```

2.2.2 Modeling

The Modeling section provides information to help you easily navigate the process of building, understanding, and analyzing models.

Projects

All of the modeling within DataRobot happens within a project. Each project has one dataset that is used as the source from which to train models.

Create a Project

You can create a project from previously created *Datasets* or directly from a data source.

```
import datarobot as dr
dataset = Dataset.create_from_file(file_path='/home/user/data/last_week_data.csv')
project = dr.Project.create_from_dataset(dataset.id, project_name='New Project')
```

The following command creates a new project directly from a data source. You must specify a path to data file, file object URL (starting with `http://`, `https://`, `file://`, or `s3://`), raw file contents, or a `pandas.DataFrame` object when creating a new project. Path to file can be either a path to a local file or a publicly accessible URL.

```
import datarobot as dr
project = dr.Project.create('/home/user/data/last_week_data.csv',
                           project_name='New Project')
```

You can use the following commands to view the project ID and name:

```
project.id
>>> u'5506fcd38bd88f5953219da0'
project.project_name
>>> u'New Project'
```

Select Modeling Parameters

The final information needed to begin modeling includes the target feature, the queue mode, the metric for comparing models, and the optional parameters such as weights, offset, exposure and downsampling.

Target

The target must be the name of one of the columns of data uploaded to the project.

Metric

The optimization metric used to compare models is an important factor in building accurate models. If a metric is not specified, the default metric recommended by DataRobot will be used. You can use the following code to view a list of valid metrics for a specified target:

```
target_name = 'ItemsPurchased'
project.get_metrics(target_name)
>>> {'available_metrics': [
    'Gini Norm',
    'Weighted Gini Norm',
    'Weighted R Squared',
    'Weighted RMSLE',
    'Weighted MAPE',
    'Weighted Gamma Deviance',
    'Gamma Deviance',
    'RMSE',
    'Weighted MAD',
    'Tweedie Deviance',
    'MAD',
    'RMSLE',
    'Weighted Tweedie Deviance',
    'Weighted RMSE',
    'MAPE',
    'Weighted Poisson Deviance',
    'R Squared',
    'Poisson Deviance'],
    'feature_name': 'SalePrice'}
```

Partitioning Method

DataRobot projects always have a *holdout* set used for final model validation. We use two different approaches for testing prior to the holdout set:

- split the remaining data into *training* and *validation* sets
- cross-validation, in which the remaining data is split into a number of folds (partitions); each fold serves as a validation set, with models trained on the other folds and evaluated on that fold.

There are several other options you can control. To specify a partition method, create an instance of one of the *Partition Classes*, and pass it as the `partitioning_method` argument in your call to `project.analyze_and_model` or `project.start`. As of v3.0 you can alternately use `project.set_partitioning_method`. See [here](#) for more information on using datetime partitioning.

Several partitioning methods include parameters for `validation_pct` and `holdout_pct`, specifying desired percentages for the validation and holdout sets. Note that there may be constraints that prevent the actual percentages used from exactly (or some cases, even closely) matching the requested percentages.

Queue Mode

You can use the API to set the DataRobot modeling process to run in either automatic or manual mode.

Autopilot mode means that the modeling process will proceed completely automatically, including running recommended models, running at different sample sizes, and blending.

Manual mode means that DataRobot will populate a list of recommended models, but will not insert any of them into the queue. Manual mode lets you select which models to execute before starting the modeling process.

Quick mode means that a smaller set of Blueprints is used, so autopilot finishes faster.

Weights

DataRobot also supports using a weight parameter. A full discussion of the use of weights in data science is not within the scope of this document, but weights are often used to help compensate for rare events in data. You can specify a column name in the project dataset to be used as a weight column.

Offsets

Starting with version v2.6 DataRobot also supports using an offset parameter. Offsets are commonly used in insurance modeling to include effects that are outside of the training data due to regulatory compliance or constraints. You can specify the names of several columns in the project dataset to be used as the offset columns.

Exposure

Starting with version v2.6 DataRobot also supports using an exposure parameter. Exposure is often used to model insurance premiums where strict proportionality of premiums to duration is required. You can specify the name of the column in the project dataset to be used as an exposure column.

Start Modeling

Once you have selected modeling parameters, you can use the following code structure to specify parameters and start the modeling process.

```
import datarobot as dr
project.analyze_and_model(target='ItemsPurchased',
                          metric='Tweedie Deviance',
                          mode=dr.AUTOPILOT_MODE.FULL_AUTO)
```

You can also pass additional optional parameters to `project.analyze_and_model` to change parameters of the modeling process. Some of those parameters include:

- `worker_count` – int, sets number of workers used for modeling.
- `partitioning_method` – `PartitioningMethod` object.
- `positive_class` – str, float, or int; Specifies a level of the target column that should be treated as the positive class for binary classification. May only be specified for binary classification targets.
- `advanced_options` – `AdvancedOptions` object, used to set advanced options of modeling process. Can alternatively call `set_options` on a project instance which will be used automatically if nothing is passed here.
- `target_type` – str, override the automatically selected `target_type`. An example usage would be setting the `target_type=TARGET_TYPE.MULTICLASS` when you want to perform a multiclass classification task on a numeric column that has a low cardinality.

For a full reference of available parameters, see [Project.analyze_and_model](#).

You can run with different autopilot modes with the `mode` parameter. `AUTOPILOT_MODE.FULL_AUTO` is the default, which will trigger modeling with no further actions necessary. Other accepted modes include `AUTOPILOT_MODE.MANUAL` for manual mode (choose your own models to run rather than use the DataRobot autopilot) and `AUTOPILOT_MODE.QUICK` (run on a more limited set of models to get insights more quickly).

Clone a Project

Once a project has been successfully created, you may clone it using the following code structure:

```
new_project = project.clone_project(new_project_name='This is my new project')
new_project.project_name
>> 'This is my new project'
new_project.id != project.id
>> True
```

The `new_project_name` attribute is optional. If it is omitted, the default new project name will be "Copy of <project.name>".

Interact with a Project

The following commands can be used to manage DataRobot projects.

List Projects

Returns a list of projects associated with current API user.

```
import datarobot as dr
dr.Project.list()
>>> [Project(Project One), Project(Two)]

dr.Project.list(search_params={'project_name': 'One'})
>>> [Project(One)]
```

You can pass following parameters to change result:

- `search_params` – dict, used to filter returned projects. Currently you can query projects only by `project_name`

Get an existing project

Rather than querying the full list of projects every time you need to interact with a project, you can retrieve its `id` value and use that to reference the project.

```
import datarobot as dr
project = dr.Project.get(project_id='5506fcd38bd88f5953219da0')
project.id
>>> '5506fcd38bd88f5953219da0'
project.project_name
>>> 'Churn Projection'
```

Get feature association statistics for an existing project

Get either feature association or correlation statistics and metadata on informative features for a given project

```
import datarobot as dr
project = dr.Project.get(project_id='5506fcd38bd88f5953219da0')
association_data = project.get_associations(assoc_type='association', metric=
↳ 'mutualInfo')
association_data.keys()
>>> ['strengths', 'features']
```

Get whether your featurelists have association statistics

Get whether an association matrix job has been run on each of your featurelists

```
import datarobot as dr
project = dr.Project.get(project_id='5506fcd38bd88f5953219da0')
featurelists = project.get_association_featurelists()
featurelists['featurelists'][0]
>>> {"featurelistId": "54e510ef8bd88f5aeb02a3ed", "hasFam": True, "title":
↳ "Informative Features"}
```

Get a Project's featurelist by name

Get a featurelist by name

```
import datarobot as dr
project = dr.Project.get(project_id='5506fcd38bd88f5953219da0')
featurelist = project.get_featurelist_by_name("Raw Features")
featurelist
>>> Featurelist(Raw Features)

# Trying to get featurelist that does not exist
featurelist = project.get_featurelist_by_name("Flying Circus")
featurelist is None
>>> True
```

Create Project featurelists

Using the project's create_featurelist() method, you can create feature lists in multiple ways:

```
import datarobot as dr
project = dr.Project.get(project_id='5506fcd38bd88f5953219da0')

featurelist_one = project.create_featurelist(
    name="Testing featurelist creation",
    features=["age", "weight", "number_diagnoses"],
)
featurelist_one
>>> Featurelist(Testing featurelist creation)
featurelist_one.features
>>> ['age', 'weight', 'number_diagnoses']

# Create a feature list using another feature list as a starting point (`starting_
↳ featurelist`)
# To Note: this example passes the `featurelist` object but you can also pass the
```

(continues on next page)

(continued from previous page)

```
# id (`starting_featurelist_id`) or the name (`starting_featurelist_name`)
featurelist_two = project.create_featurelist(
    starting_featurelist=featurelist_one,
    features_to_exclude=["number_diagnoses"], # Please see docs for use of `features_
↳to_include`
)
featurelist_two # Note below we have an auto-generated name because we did not pass_
↳`name`
>>> Featurelist(Testing featurelist creation - 2022-07-12)
>>> # Note below we have a new feature list which has `number_diagnoses` excluded
featurelist_two.features
>>> ['age', 'weight']
```

Get values for a pair of features in an existing project

Get a sample of the exact values used in the feature association matrix plotting

```
import datarobot as dr
project = dr.Project.get(project_id='5506fcd38bd88f5953219da0')
feature_values = project.get_association_matrix_details(feature1='foo', feature2='bar
↳')
feature_values.keys()
>>> ['features', 'types', 'values']
```

Update a project

You can update various attributes of a project.

To update the name of the project:

```
project.rename(new_name)
```

To update the number of workers used by your project (this will fail if you request more workers than you have available; the special value `-1` will request your maximum number):

```
project.set_worker_count(num_workers)
```

To unlock the holdout set, allowing holdout scores to be shown and models to be trained on more data:

```
project.unlock_holdout()
```

To add or change the project description:

```
project.set_project_description(project_description)
```

To add or change the project's advanced_options:

```
# Using kwargs
project.set_options(blend_best_models=False)

# Using an ``AdvancedOptions`` instance
project.set_options(AdvancedOptions(blend_best_models=False))
```

Delete a project

Use the following command to delete a project:

```
project.delete()
```

Wait for Autopilot to Finish

Once the modeling autopilot is started, in some cases you will want to wait for autopilot to finish:

```
project.wait_for_autopilot()
```

Play/Pause the autopilot

If your project is running in autopilot mode, it will continually use available workers, subject to the number of workers allocated to the project and the total number of simultaneous workers allowed according to the user permissions.

To pause a project running in autopilot mode:

```
project.pause_autopilot()
```

To resume running a paused project:

```
project.unpause_autopilot()
```

Start autopilot on another Featurelist

You can start autopilot on an existing featurelist.

```
import datarobot as dr

featurelist = project.create_featurelist('test', ['feature 1', 'feature 2'])
project.start_autopilot(featurelist.id)
>>> True

# Starting autopilot that is already running on the provided featurelist
project.start_autopilot(featurelist.id)
>>> dr.errors.AppPlatformError
```

Note: This method should be used on a project where the target has already been set. An error will be raised if autopilot is currently running on or has already finished running on the provided featurelist.

Start preparing a specific model for deployment

You can start preparing a specific model for deployment. The model will then go through the various recommendation stages including retraining on a reduced feature list and retraining the model on a higher sample size (recent data for datetime partitioned).

```
# prepare a specific model for deployment and wait for the process to complete
project.start_prepare_model_for_deployment(model_id=model.id)
project.wait_for_autopilot(check_interval=5, timeout=600)
# get the prepared model
prepared_for_deployment_model = dr.models.ModelRecommendation.get (
    project.id, recommendation_type=RECOMMENDED_MODEL_TYPE.PREPARED_FOR_DEPLOYMENT
)
prepared_for_deployment_model_id = prepared_for_deployment_model.model_id
```

Note: This method should be used on a project where the target has already been set. An error will be raised if autopilot is currently running on the project or another model in the project is being prepared for deployment.

Further reading

The Blueprints and Models sections of this document will describe how to create new models based on the Blueprints recommended by DataRobot.

Using Credential Data

For methods that accept credential data instead of user/password or credential ID, please see *Credential Data*.

Models

When a blueprint has been trained on a specific dataset at a specified sample size, the result is a model. Models can be inspected to analyze their accuracy.

Start Training a Model

To start training a model, use the *Project.train* method with a blueprint object:

```
import datarobot as dr
project = dr.Project.get('5506fcd38bd88f5953219da0')
blueprints = project.get_blueprints()
model_job_id = project.train(blueprints[0].id)
```

For a Datetime Partitioned Project (see Specialized Workflows section), use *Project.train_datetime*:

```
import datarobot as dr
project = dr.Project.get('5506fcd38bd88f5953219da0')
blueprints = project.get_blueprints()
model_job_id = project.train_datetime(blueprints[0].id)
```

List Finished Models

You can use the *Project.get_models* method to return a list of the project models that have finished training:

```

import datarobot as dr
project = dr.Project.get('5506fcd38bd88f5953219da0')
models = project.get_models()
print(models[:5])
>>> [Model(Decision Tree Classifier (Gini)),
      Model(Auto-tuned K-Nearest Neighbors Classifier (Minkowski Distance)),
      Model(Gradient Boosted Trees Classifier (R)),
      Model(Gradient Boosted Trees Classifier),
      Model(Logistic Regression)]
model = models[0]

project.id
>>> u'5506fcd38bd88f5953219da0'
model.id
>>> u'5506fcd98bd88f1641a720a3'

```

You can pass following parameters to change result:

- `search_params` – dict, used to filter returned projects. Currently you can query models by
 - name
 - sample_pct
 - is_starred
- `order_by` – str or list, if passed returned models are ordered by this attribute(s). Allowed attributes to sort by are:
 - metric
 - sample_pct

If the sort attribute is preceded by a hyphen, models will be sorted in descending order, otherwise in ascending order. Multiple sort attributes can be included as a comma-delimited string or in a list e.g. `order_by='sample_pct,-metric'` or `order_by=['sample_pct', '-metric']`. Using *metric* to sort by will result in models being sorted according to their validation score by how well they did according to the project metric.
- `with_metric` – str, If not *None*, the returned models will only have scores for this metric. Otherwise all the metrics are returned.

List Models Example:

```

import datarobot as dr

dr.Project('5506fcd38bd88f5953219da0').get_models(order_by=['sample_pct', '-metric'])

# Getting models that contain "Ridge" in name
# and with sample_pct more than 64
dr.Project('5506fcd38bd88f5953219da0').get_models(
    search_params={
        'sample_pct__gt': 64,
        'name': "Ridge"
    })

# Getting models marked as starred
dr.Project('5506fcd38bd88f5953219da0').get_models(
    search_params={
        'is_starred': True
    })

```

Retrieve a Known Model

If you know the `model_id` and `project_id` values of a model, you can retrieve it directly:

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
model = dr.Model.get(project=project_id,
                    model_id=model_id)
```

You can also use an instance of `Project` as the parameter for `Model.get`

```
model = dr.Model.get(project=project,
                    model_id=model_id)
```

Retrieve the highest scoring model for a given metric

You can retrieve the highest scoring model for a project based on a metric of your choice.

If you decide not to pass a metric to this method or if you pass the default project metric (the value of the `metric` attribute of your project instance), the result of `Project.recommended_model` is returned.

```
import datarobot as dr
project = dr.Project.get('5506fcd38bd88f5953219da0')
top_model_r_squared = project.get_top_model(metric="R Squared")
```

Train a Model on a Different Sample Size

One of the key insights into a model and the data behind it is how its performance varies with more training data. In Autopilot mode, DataRobot will run at several sample sizes by default, but you can also create a job that will run at a specific sample size. You can also specify a featurelist that should be used for training the new model. The `Model.train` method of a `Model` instance will put a new modeling job into the queue and return the id of the created `ModelJob`. You can pass the `ModelJob` id to the `wait_for_async_model_creation` function, which polls the async model creation status and returns the newly created model when it's finished.

```
import datarobot as dr

model_job_id = model.train(sample_pct=33)

# Retrain a model on a custom featurelist using cross validation.
# Note that you can specify a custom value for `sample_pct`.
model_job_id = model.train(
    sample_pct=55,
    featurelist_id=custom_featurelist.id,
    scoring_type=dr.SCORING_TYPE.cross_validation,
)
```

Cross-Validating a Model

By default, models are evaluated on the first validation partition. To start cross-validation, use the `Model.cross_validate` method:

```
import datarobot as dr

model_job_id = model.cross_validate()
```

For a `:doc:Datetime Partitioned Project`, backtesting is the only cross-validation method supported. To run backtesting for a datetime model, use the `DatetimeModel.score_backtests` method:

```
import datarobot as dr

# `model` here must be an instance of `dr.DatetimeModel`.
model_job_id = model.score_backtests()
```

Find the Features Used

Because each project can have many associated featurelists, it is important to know which features a model requires in order to run. This helps ensure that the necessary features are provided when generating predictions.

```
feature_names = model.get_features_used()
print(feature_names)
>>> ['MonthlyIncome',
      'VisitsLast8Weeks',
      'Age']
```

Feature Impact

Feature Impact measures how much worse a model's error score would be if DataRobot made predictions after randomly shuffling a particular column (a technique sometimes called *Permutation Importance*).

The following example code snippet shows how a featurelist with just the features with the highest feature impact could be created.

```
import datarobot as dr

max_num_features = 10
time_to_wait_for_impact = 4 * 60 # seconds

feature_impacts = model.get_or_request_feature_impact(time_to_wait_for_impact)

feature_impacts.sort(key=lambda x: x['impactNormalized'], reverse=True)
final_names = [f['featureName'] for f in feature_impacts[:max_num_features]]

project.create_featurelist('highest_impact', final_names)
```

For datetime aware models Feature Impact can be calculated for any backtest and holdout.

```
import datarobot as dr

datetime_model = dr.Model.get(project=project_id, model_id=model_id)
feature_impacts = datetime_model.get_or_request_feature_impact(backtest=1, with_
↳ metadata=True)
```

Feature Effects

Feature Effects helps to understand how changing a single feature affects the target while holding all other features constant. Feature Effects provides partial dependence plot and prediction vs accuracy plot data.

```
import datarobot as dr

feature_effects = model.get_or_request_feature_effect(source='validation')
```

For multiclass models use `request_feature_effect_multiclass` and `get_feature_effects_multiclass` or `get_or_request_feature_effect_multiclass` methods.

```
import datarobot as dr

feature_effects = model.get_feature_effect(source='validation')
```

Predict new data

After creating models, you can use them to generate predictions on new data. See the Predictions documentation for further information on how to request predictions from a model.

Model IDs vs. Blueprint IDs

Each model has both a `model_id` and a `blueprint_id`.

A model is the result of training a blueprint on a dataset at a specified sample percentage. The `blueprint_id` is used to keep track of which blueprint was used to train the model, while the `model_id` is used to locate the trained model in the system.

Model parameters

Some models can have parameters that provide data needed to reproduce their predictions.

For additional usage information see DataRobot documentation, section [Coefficients](#) tab and [pre-processing details](#).

```
import datarobot as dr

model = dr.Model.get(project=project, model_id=model_id)
mp = model.get_parameters()
print(mp.derived_features)
>>> [{
    'coefficient': -0.015,
    'originalFeature': u'A1Cresult',
    'derivedFeature': u'A1Cresult->7',
    'type': u'CAT',
    'transformations': [{'name': u'One-hot', 'value': u">7"}]}
}]
```

Create a Blender

You can blend multiple models; in many cases, the resulting blender model is more accurate than the parent models. To do so you need to select parent models and a blender method from `datarobot.enums.BLENDER_METHOD`. If this is a time series project, only methods in `datarobot.enums.TS_BLENDER_METHOD` are allowed.

Be aware that the tradeoff for better prediction accuracy is bigger resource consumption and slower predictions.

```
import datarobot as dr

pr = dr.Project.get(pid)
models = pr.get_models()
parent_models = [model.id for model in models[:2]]
pr.blend(parent_models, dr.enums.BLENDER_METHOD.AVERAGE)
```

Lift chart retrieval

You can use the `Model` methods `get_lift_chart` and `get_all_lift_charts` to retrieve lift chart data. The first will get it from specific source (validation data, cross validation or unlocked holdout) and the second will list all available data.

For multiclass models, you can get a list of per-class lift charts using the `Model` method `get_multiclass_lift_chart`.

ROC curve retrieval

Same as with the lift chart, you can use `Model` methods `get_roc_curve` and `get_all_roc_curves` to retrieve ROC curve data. More information about working with ROC curves can be found in DataRobot web application documentation section [ROC Curve tab details](#).

Residuals chart retrieval

Just as with the lift and ROC charts, you can use `Model` methods `get_residuals_chart` and `get_all_residuals_charts` to retrieve residuals chart data. The first will get it from a specific source (validation data, cross-validation data, or unlocked holdout). The second will retrieve all available data.

Word Cloud

If your dataset contains text columns, DataRobot can create text processing models that will contain word cloud insight data. An example of such a model is any [Auto-Tuned Word N-Gram Text Modeler](#) model. You can use the `Model.get_word_cloud` method to retrieve those insights - it will provide up to the 200 most important ngrams in the model and coefficients corresponding to their influence.

Scoring Code

Subset of models in DataRobot supports code generation. For each of those models you can download a JAR file with scoring code to make predictions locally using the method `Model.download_scoring_code`. For details on how to do that see [Code Generation](#) section in DataRobot web application documentation. Optionally you can download source code in Java to see what calculations those models do internally.

Be aware that the source code JAR isn't compiled so it cannot be used for making predictions.

Get a model blueprint chart

For any model, you can retrieve its blueprint chart. You can also get its representation in graphviz DOT format to render it into the format you need.

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
model = dr.Model.get(project=project_id,
                    model_id=model_id)
bp_chart = model.get_model_blueprint_chart()
print(bp_chart.to_graphviz())
```

Get a model missing values report

For the majority of models, you can retrieve their missing values reports on training data per each numeric and categorical feature. Model needs to have at least one of the supported tasks in the blueprint in order to have a missing values report (blenders are not supported). Report is gathered for Numerical Imputation tasks and Categorical converters like Ordinal Encoding, One-Hot Encoding, etc. Missing values report is available to users with access to full blueprint docs.

A report is collected for those features which are considered eligible by a given blueprint task. For instance, a categorical feature with a lot of unique values may not be considered as eligible in the One-Hot encoding task.

Please refer to *Missing report attributes description* for report interpretation.

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
model = dr.Model.get(project=project_id, model_id=model_id)
missing_reports_per_feature = model.get_missing_report_info()
for report_per_feature in missing_reports_per_feature:
    print(report_per_feature)
```

Consider the following example. Given Decision Tree Classifier (Gini) blueprint chart representation:

```
print(blueprint_chart.to_graphviz())
>>> digraph "Blueprint Chart" {
    graph [rankdir=LR]
    0 [label="Data"]
    -2 [label="Numeric Variables"]
    2 [label="Missing Values Imputed"]
    3 [label="Decision Tree Classifier (Gini)"]
    4 [label="Prediction"]
    -1 [label="Categorical Variables"]
    1 [label="Ordinal encoding of categorical variables"]
    0 -> -2
    -2 -> 2
    2 -> 3
    3 -> 4
    0 -> -1
    -1 -> 1
    1 -> 3
}
```

and missing report:

```

print(report_per_feature1)
>>> {'feature': 'Veh Year',
      'type': 'Numeric',
      'missing_count': 150,
      'missing_percentage': 50.00,
      'tasks': [
        {'id': u'2',
          'name': u'Missing Values Imputed',
          'descriptions': [u'Imputed value: 2006']}
      ]
    }
print(report_per_feature2)
>>> {'feature': 'Model',
      'type': 'Categorical',
      'missing_count': 100,
      'missing_percentage': 33.33,
      'tasks': [
        {'id': u'1',
          'name': u'Ordinal encoding of categorical variables',
          'descriptions': [u'Imputed value: -2']}
      ]
    }

```

results can be interpreted in the following way:

Numeric feature “Veh Year” has 150 missing values and respectively 50% in training data. It was transformed by “Missing Values Imputed” task with imputed value 2006. Task has id 2, and its output goes into Decision Tree Classifier (Gini) - it can be inferred from the chart.

Categorical feature “Model” was transformed by “Ordinal encoding of categorical variables” task with imputed value -2.

Get a blueprint’s documentation

You can retrieve documentation on tasks used to build a model. It will contain information about the task, its parameters and (when available) links and references to additional sources. All documents are instances of `BlueprintTaskDocument` class.

```

import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
model = dr.Model.get(project=project_id,
                    model_id=model_id)
docs = model.get_model_blueprint_documents()
print(docs[0].task)
>>> Average Blend
print(docs[0].links[0]['url'])
>>> https://en.wikipedia.org/wiki/Ensemble_learning

```

Request training predictions

You can request a model’s predictions for a particular subset of its training data. See `datarobot.models.Model.request_training_predictions()` reference for all the valid subsets.

See *training predictions reference* for more details.

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
model = dr.Model.get(project=project_id,
                    model_id=model_id)
training_predictions_job = model.request_training_predictions(dr.enums.DATA_SUBSET.
    ↳HOLDOUT)
training_predictions = training_predictions_job.get_result_when_complete()
for row in training_predictions.iterate_rows():
    print(row.row_id, row.prediction)
```

Advanced Tuning

You can perform advanced tuning on a model – generate a new model by taking an existing model and rerunning it with modified tuning parameters.

The `AdvancedTuningSession` class exists to track the creation of an Advanced Tuning model on the client. It enables browsing and setting advanced-tuning parameters one at a time, and using human-readable parameter names rather than requiring opaque parameter IDs in all cases. No information is sent to the server until the `run()` method is called on the `AdvancedTuningSession`.

See `datarobot.models.Model.get_advanced_tuning_parameters()` reference for a description of the types of parameters that can be passed in.

As of v2.17, all models other than blenders, open source, and user-created models support Advanced Tuning. The use of Advanced Tuning via API for non-Eureqa models is in beta, but is enabled by default for all users.

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
model = dr.Model.get(project=project_id,
                    model_id=model_id)
tune = model.start_advanced_tuning_session()

# Get available task names,
# and available parameter names for a task name that exists on this model
tune.get_task_names()
tune.get_parameter_names('Eureqa Generalized Additive Model Classifier (3000_
    ↳Generations)')

tune.set_parameter(
    task_name='Eureqa Generalized Additive Model Classifier (3000 Generations)',
    parameter_name='EUREQA_building_block__sine',
    value=1)

job = tune.run()
```

SHAP Impact

You can retrieve SHAP impact scores for features in a model. SHAP impact is computed by calculating the shap values on a sample of training data and then taking the mean absolute value for each column. The larger value of impact indicates a more important feature.

See `datarobot.models.ShapImpact.create()` reference for a description of the types of parameters that can be passed in.

```
import datarobot as dr

project_id = '5ec3d6884cfad17cd8c0ed62'
model_id = '5ec3d6f44cfad17cd8c0ed78'
shap_impact_job = dr.ShapImpact.create(project_id=project_id, model_id=model_id)
shap_impact = shap_impact_job.get_result_when_complete()
print(shap_impact)
>>> [ShapImpact(count=36)]
print(shap_impact.shap_impacts[:1])
>>> [{'feature_name': 'number_inpatient', 'impact_normalized': 1.0, 'impact_
↪unnormalized': 0.07670175497683789}]

shap_impact = dr.ShapImpact.get(project_id=project_id, model_id=model_id)
print(shap_impact.shap_impacts[:1])
>>> [{'feature_name': 'number_inpatient', 'impact_normalized': 1.0, 'impact_
↪unnormalized': 0.07670175497683789}]
```

Number of Iterations Trained

Early-stopping models will train a subset of max estimators/iterations that are defined in advanced tuning. This method allows the user to retrieve the actual number of estimators that were trained by an early-stopping tree-based model (currently the only model type supported). The method returns the `projectId`, `modelId`, and a list of dictionaries containing the number of iterations trained for each model stage. In the case of single-stage models, this dictionary will contain only one entry.

```
import datarobot as dr

project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
model = dr.Model.get(project=project_id,
                    model_id=model_id)
num_iterations = model.get_num_iterations_trained()
print(num_iterations)
>>> {"projectId": "5506fcd38bd88f5953219da0", "modelId": "5506fcd98bd88f1641a720a3",
↪ "data" [{"stage": "FREQ", "numIterations":250}, {"stage":"SEV", "numIterations":50}
↪]}
```

Blueprints

The set of computation paths that a dataset passes through before producing predictions from data is called a blueprint. A blueprint can be trained on a dataset to generate a model.

To modify blueprints using python, please refer to the [documentation for the Blueprint Workshop](#).

Quick Reference

The following code block summarizes the interactions available for blueprints.

```
# Get the set of blueprints recommended by datarobot
import datarobot as dr
my_projects = dr.Project.list()
```

(continues on next page)

(continued from previous page)

```
project = my_projects[0]
menu = project.get_blueprints()

first_blueprint = menu[0]
project.train(first_blueprint)
```

List Blueprints

When a file is uploaded to a project and the target is set, DataRobot recommends a set of blueprints that are appropriate for the task at hand. You can use the `get_blueprints` method to get the list of blueprints recommended for a project:

```
project = dr.Project.get('5506fcd38bd88f5953219da0')
menu = project.get_blueprints()
blueprint = menu[0]
```

Get a blueprint

If you already have a `blueprint_id` from a model you can retrieve the blueprint directly.

```
project_id = '5506fcd38bd88f5953219da0'
project = dr.Project.get(project_id)
models = project.get_models()
model = models[0]
blueprint = Blueprint.get(project_id, model.blueprint_id)
```

Get a blueprint chart

For all blueprints - either from blueprint menu or already used in model - you can retrieve its chart. You can also get its representation in graphviz DOT format to render it into the format you need.

```
project_id = '5506fcd38bd88f5953219da0'
blueprint_id = '4321fcd38bd88f595321554223'
bp_chart = BlueprintChart.get(project_id, blueprint_id)
print(bp_chart.to_graphviz())
```

Get a blueprint's documentation

You can retrieve documentation on tasks used in the blueprint. It will contain information about task, its parameters and (when available) links and references to additional sources. All documents are instances of `BlueprintTaskDocument` class.

```
project_id = '5506fcd38bd88f5953219da0'
blueprint_id = '4321fcd38bd88f595321554223'
bp = Blueprint.get(project_id, blueprint_id)
docs = bp.get_documents()
print(docs[0].task)
>>> Average Blend
```

(continues on next page)

(continued from previous page)

```
print(docs[0].links[0]['url'])
>>> https://en.wikipedia.org/wiki/Ensemble_learning
```

Blueprint Attributes

The Blueprint class holds the data required to use the blueprint for modeling. This includes the `blueprint_id` and `project_id`. There are also two attributes that help distinguish blueprints: `model_type` and `processes`.

```
print(blueprint.id)
>>> u'8956e1aeecffa0fa6db2b84640fb3848'
print(blueprint.project_id)
>>> u5506fcd38bd88f5953219da0'
print(blueprint.model_type)
>>> Logistic Regression
print(blueprint.processes)
>>> ['One-Hot Encoding',
    u'Missing Values Imputed',
    u'Standardize',
    u'Logistic Regression']
```

Create a Model from a Blueprint

You can use a blueprint instance to train a model. The default dataset for the project is used. Note that `Project.train` is used for non-datetime-partitioned projects. `Project.train_datetime` should be used for datetime partitioned projects.

```
model_job_id = project.train(blueprint)

# For datetime partitioned projects
model_job = project.train_datetime(blueprint.id)
```

Both `Project.train` and `Project.train_datetime` will put a new modeling job into the queue. However, note that `Project.train` returns the id of the created `ModelJob`, while `Project.train_datetime` returns the `ModelJob` object itself. You can pass a `ModelJob` id to `wait_for_async_model_creation` function, which polls the async model creation status and returns the newly created model when it's finished.

Specialized workflows

The following sections describe alternative workflows for a variety of specialized data types.

Datetime Partitioned Projects

If your dataset is modeling events taking place over time, datetime partitioning may be appropriate. Datetime partitioning ensures that when partitioning the dataset for training and validation, rows are ordered according to the value of the date partition feature.

Setting Up a Datetime Partitioned Project

After creating a project and before setting the target, create a *DatetimePartitioningSpecification* to define how the project should be partitioned. By passing the specification into `DatetimePartitioning.generate`, the full partitioning can be previewed before finalizing the partitioning. After verifying that the partitioning is correct for the project dataset, pass the specification into `Project.analyze_and_model` via the `partitioning_method` argument. Alternatively, as of v3.0, by using `Project.set_datetime_partitioning()`, the partitioning (and individual options of the partitioning specification) can be updated (with repeated method calls) up until calling `Project.analyze_and_model`. Once modeling begins, the project can be used as normal.

The following code block shows the basic workflow for creating datetime partitioned projects.

```
import datarobot as dr

project = dr.Project.create('some_data.csv')
spec = dr.DatetimePartitioningSpecification('my_date_column')
# can customize the spec as needed

partitioning_preview = dr.DatetimePartitioning.generate(project.id, spec)
# the preview generated is based on the project's data

print(partitioning_preview.to_dataframe())
# hmm ... I want more backtests
spec.number_of_backtests = 5
partitioning_preview = dr.DatetimePartitioning.generate(project.id, spec)
print(partitioning_preview.to_dataframe())
# looks good
project.analyze_and_model('target_column')

# As of v3.0, ``Project.set_datetime_partitioning()`` and ``Project.list_datetime_
↪partition_spec()``
# are available as an alternative:

# view settings
project.list_datetime_partition_spec()
# maybe I want to also disable holdout before starting modeling
project.set_datetime_partitioning(disable_holdout=True)
# view settings
project.list_datetime_partition_spec()
# all of the settings look good
# don't need to pass the spec into ``analyze_and_model`` because it's already been set
project.analyze_and_model('target_column')

# I can retrieve the partitioning settings after the target has been set too
partitioning = dr.DatetimePartitioning.get(project.id)
```

Configuring Backtests

Backtests are configurable using one of two methods:

Method 1:

- `index` (int): The index from zero of this backtest.
- `gap_duration` (str): A duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. This represents the gap between training and validation scoring data for this backtest.

- `validation_start_date` (`datetime.datetime`): Represents the start date of the validation scoring data for this backtest.
- `validation_duration` (`str`): A duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. This represents the desired duration of the validation scoring data for this backtest.

```
import datarobot as dr
from datetime import datetime

partitioning_spec = dr.DatetimePartitioningSpecification(
    backtests=[
        # modify the first backtest using option 1
        dr.BacktestSpecification(
            index=0,
            gap_duration=dr.partitioning_methods.construct_duration_string(),
            validation_start_date=datetime(year=2010, month=1, day=1),
            validation_duration=dr.partitioning_methods.construct_duration_
↪string(years=1),
        )
    ],
    # other partitioning settings...
)
```

Method 2 (New in version v2.20):

- `validation_start_date` (`datetime.datetime`): Represents the start date of the validation scoring data for this backtest.
- `validation_end_date` (`datetime.datetime`): Represents the end date of the validation scoring data for this backtest.
- `primary_training_start_date` (`datetime.datetime`): Represents the desired start date of the training partition for this backtest.
- `primary_training_end_date` (`datetime.datetime`): Represents the desired end date of the training partition for this backtest.

```
import datarobot as dr
from datetime import datetime

partitioning_spec = dr.DatetimePartitioningSpecification(
    backtests=[
        # modify the first backtest using option 2
        dr.BacktestSpecification(
            index=0,
            primary_training_start_date=datetime(year=2005, month=1, day=1),
            primary_training_end_date=datetime(year=2010, month=1, day=1),
            validation_start_date=datetime(year=2010, month=1, day=1),
            validation_end_date=datetime(year=2011, month=1, day=1),
        )
    ],
    # other partitioning settings...
)
```

Note that Method 2 allows you to directly configure the start and end dates of each partition, including the training partition. The gap partition is calculated as the time between `primary_training_end_date` and `validation_start_date`. Using the same date for both `primary_training_end_date` and `validation_start_date` will result in no gap being created.

After configuring backtests, you can set `use_project_settings` to `True` in calls to `Model`.

`train_datetime`. This will create models that are trained and validated using your custom backtest training partition start and end dates.

Modeling with a Datetime Partitioned Project

While `Model` objects can still be used to interact with the project, `DatetimeModel` objects, which are only retrievable from datetime partitioned projects, provide more information including which date ranges and how many rows are used in training and scoring the model as well as scores and statuses for individual backtests.

The autopilot workflow is the same as for other projects, but to manually train a model, `Project.train_datetime` and `Model.train_datetime` should be used in the place of `Project.train` and `Model.train`. To create frozen models, `Model.request_frozen_datetime_model` should be used in place of `DatetimeModel.request_frozen_datetime_model`. Unlike other projects, to trigger computation of scores for all backtests use `DatetimeModel.score_backtests` instead of using the `scoring_type` argument in the `train` methods.

Accuracy Over Time Plots

For datetime partitioned model you can retrieve the Accuracy over Time plot. To do so use `DatetimeModel.get_accuracy_over_time_plot`. You can also retrieve the detailed metadata using `DatetimeModel.get_accuracy_over_time_plots_metadata`, and the preview plot using `DatetimeModel.get_accuracy_over_time_plot_preview`.

Dates, Datetimes, and Durations

When specifying a date or datetime for datetime partitioning, the client expects to receive and will return a `datetime`. Timezones may be specified, and will be assumed to be UTC if left unspecified. All dates returned from DataRobot are in UTC with a timezone specified.

Datetimes may include a time, or specify only a date; however, they may have a non-zero time component only if the partition column included a time component in its date format. If the partition column included only dates like `2015-03-24T00:00:00`, then the time component of any datetimes, if present, must be zero.

When date ranges are specified with a start and an end date, the end date is exclusive, so only dates earlier than the end date are included, but the start date is inclusive, so dates equal to or later than the start date are included. If the start and end date are the same, then no dates are included in the range.

Durations are specified using a subset of ISO8601. Durations will be of the form `PnYnMnDnHnMnS` where each `n` may be replaced with an integer value. Within the duration string,

- `nY` represents the number of years
- the `nM` following the `P` represents the number of months
- `nD` represents the number of days
- `nH` represents the number of hours
- the `nM` following the `T` represents the number of minutes
- `nS` represents the number of seconds

and `P` is used to indicate that the string represents a period and `T` indicates the beginning of the time component of the string. Any section with a value of 0 may be excluded. As with datetimes, if the partition column did not include a time component in its date format, the time component of any duration must be either unspecified or consist only of zeros.

Example Durations:

- `â€”IJP3Y6Mâ€”I` (three years, six months)
- `â€”IJP1Y0MODT0H0M0Sâ€”I` (one year)
- `â€”IJP1Y5DT10Hâ€”I` (one year, 5 days, 10 hours)

`datarobot.helpers.partitioning_methods.construct_duration_string` is a helper method that can be used to construct appropriate duration strings.

Time Series Projects

Time series projects, like OTV projects, use *datetime partitioning*, and all the workflow changes that apply to other datetime partitioned projects also apply to them. Unlike other projects, time series projects produce different types of models which forecast multiple future predictions instead of an individual prediction for each row.

DataRobot uses a general time series framework to configure how time series features are created and what future values the models will output. This framework consists of a Forecast Point (defining a time a prediction is being made), a Feature Derivation Window (a rolling window used to create features), and a Forecast Window (a rolling window of future values to predict). These components are described in more detail below.

Time series projects will automatically transform the dataset provided in order to apply this framework. During the transformation, DataRobot uses the Feature Derivation Window to derive time series features (such as lags and rolling statistics), and uses the Forecast Window to provide examples of forecasting different distances in the future (such as time shifts). After project creation, a new dataset and a new feature list are generated and used to train the models. This process is reapplied automatically at prediction time as well in order to generate future predictions based on the original data features.

The `time_unit` and `time_step` used to define the Feature Derivation and Forecast Windows are taken from the datetime partition column, and can be retrieved for a given column in the input data by looking at the corresponding attributes on the `datarobot.models.Feature` object. If `windows_basis_unit` is set to ROW, then Feature Derivation and Forecast Windows will be defined using number of the rows.

Setting Up A Time Series Project

To set up a time series project, follow the standard *datetime partitioning* workflow and use the six new time series specific parameters on the `datarobot.DatetimePartitioningSpecification` object:

use_time_series bool, set this to True to enable time series for the project.

default_to_known_in_advance bool, set this to True to default to treating all features as known in advance, or a priori, features. Otherwise, they will not be handled as known in advance features. Individual features can be set to a value different than the default by using the `featureSettings` parameter. See *the prediction documentation* for more information.

default_to_do_not_derive bool, set this to True to default to excluding all features from feature derivation. Otherwise, they will not be excluded and will be included in the feature derivation process. Individual features can be set to a value different than the default by using the `featureSettings` parameter.

feature_derivation_window_start int, specifies how many units of the `windows_basis_unit` from the forecast point into the past is the start of the feature derivation window

feature_derivation_window_end int, specifies how many units of the `windows_basis_unit` from the forecast point into the past is the end of the feature derivation window

forecast_window_start int, specifies how many units of the `windows_basis_unit` from the forecast point into the future is the start of the forecast window

forecast_window_end int, specifies how many units of the `windows_basis_unit` from the forecast point into the future is the end of the forecast window

windows_basis_unit string, set this to `ROW` to define feature derivation and forecast windows in terms of the rows, rather than time units. If omitted, will default to the detected time unit (one of the `datarobot.enums.TIME_UNITS`).

feature_settings list of `FeatureSettings` specifying per feature settings, can be left unspecified

Feature Derivation Window

The Feature Derivation window represents the rolling window that is used to derive time series features and lags, relative to the Forecast Point. It is defined in terms of `feature_derivation_window_start` and `feature_derivation_window_end` which are integer values representing datetime offsets in terms of the `time_unit` (e.g. hours or days).

The Feature Derivation Window start and end must be less than or equal to zero, indicating they are positioned before the forecast point. Additionally, the window must be specified as an integer multiple of the `time_step` which defines the expected difference in time units between rows in the data.

The window is closed, meaning the edges are considered to be inside the window.

Forecast Window

The Forecast Window represents the rolling window of future values to predict, relative to the Forecast Point. It is defined in terms of the `forecast_window_start` and `forecast_window_end`, which are positive integer values indicating datetime offsets in terms of the `time_unit` (e.g. hours or days).

The Forecast Window start and end must be positive integers, indicating they are positioned after the forecast point. Additionally, the window must be specified as an integer multiple of the `time_step` which defines the expected difference in time units between rows in the data.

The window is closed, meaning the edges are considered to be inside the window.

Multiseries Projects

Certain time series problems represent multiple separate series of data, e.g. `Amazon` have five different stores that all have different customer bases. I want to predict how many units of a particular item will sell, and account for the different behavior of each store. When setting up the project, a column specifying series ids must be identified, so that each row from the same series has the same value in the multiseries id column.

Using a multiseries id column changes which partition columns are eligible for time series, as each series is required to be unique and regular, instead of the entire partition column being required to have those properties. In order to use a multiseries id column for partitioning, a detection job must first be run to analyze the relationship between the partition and multiseries id columns. If needed, it will be automatically triggered by calling `datarobot.models.Feature.get_multiseries_properties()` on the desired partition column. The previously computed multiseries properties for a particular partition column can then be accessed via that method. The computation will also be automatically triggered when calling `datarobot.DatetimePartitioning.generate()` or `datarobot.models.Project.analyze_and_model()` with a multiseries id column specified.

Note that currently only one multiseries id column is supported, but all interfaces accept lists of id columns to ensure multiple id columns will be able to be supported in the future.

In order to create a multiseries project:

1. Set up a datetime partitioning specification with the desired partition column and multiseries id columns.

2. (Optionally) Use `datarobot.models.Feature.get_multiseries_properties()` to confirm the inferred time step and time unit of the partition column when used with the specified multiseries id column.
3. (Optionally) Specify the multiseries id column in order to preview the full datetime partitioning settings using `datarobot.DatetimePartitioning.generate()`.
4. Specify the multiseries id column when sending the target and partitioning settings via `datarobot.models.Project.analyze_and_model()`.

```

project = dr.Project.create('path/to/multiseries.csv', project_name='my multiseries_
↳project')
partitioning_spec = dr.DatetimePartitioningSpecification(
    'timestamp', use_time_series=True, multiseries_id_columns=['multiseries_id']
)

# manually confirm time step and time unit are as expected
datetime_feature = dr.Feature.get(project.id, 'timestamp')
multiseries_props = datetime_feature.get_multiseries_properties(['multiseries_id'])
print(multiseries_props)

# manually check out the partitioning settings like feature derivation window and_
↳backtests
# to make sure they make sense before moving on
full_part = dr.DatetimePartitioning.generate(project.id, partitioning_spec)
print(full_part.feature_derivation_window_start, full_part.feature_derivation_window_
↳end)
print(full_part.to_dataframe())

# As of v3.0, can use ``Project.set_datetime_partitioning`` instead of passing the_
↳spec into ``Project.analyze_and_model`` via ``partitioning_method``.
# The spec options can be passed individually:
project.set_datetime_partitioning(use_time_series=True, datetime_partition_column=
↳'date', multiseries_id_columns=['series_id'])
# Or the whole spec object can be passed:
project.set_datetime_partitioning(datetime_spec=datetime_spec)

# finalize the project and start the autopilot
project.analyze_and_model('target', partitioning_method=partitioning_spec)

```

You can also access optimized partitioning in the API where the target over time is inspected to ensure that the default backtests cover regions of interest and adjust backtests avoid common problems with missing target values or partitions with single values (e.g. zero-inflated datasets). In this case you need to pass the target column when generating the partitioning specification (either by calling `DatetimePartitioning.generate` or `Project.set_datetime_partitioning`) and then pass the full partitioning specification when starting autopilot (if `Project.set_datetime_partitioning` is not used).

```

project = dr.Project.create('path/to/multiseries.csv', project_name='my multiseries_
↳project')
partitioning_spec = dr.DatetimePartitioningSpecification(
    'timestamp', use_time_series=True, multiseries_id_columns=['multiseries_id']
)

# Pass the target column to generate optimized partitions
full_part = dr.DatetimePartitioning.generate(project.id, partitioning_spec, 'target')

# Or, as of v3.0, call ``Project.set_datetime_partitioning`` after specifying the_
↳project target
# to generate optimized partitions.

```

(continues on next page)

(continued from previous page)

```

project.target = 'target'
project.set_datetime_partitioning(datetime_partition_spec=partitioning_spec)

# finalize the project and start the autopilot, passing in the full partitioning spec
# (if ``Project.set_datetime_partitioning`` was used there is no need to pass,
↪ ``partitioning_method``)
project.analyze_and_model('target', partitioning_method=full_part.to_specification())

```

Feature Settings

`datarobot.FeatureSettings` constructor receives `feature_name` and settings. For now settings `known_in_advance` and `do_not_derive` are supported.

```

# I have 10 features, 8 of them are known in advance and two are not
# Also, I do not want to derive new features from previous_day_sales
not_known_in_advance_features = ['previous_day_sales', 'amount_in_stock']
do_not_derive_features = ['previous_day_sales']
feature_settings = [dr.FeatureSettings(feat_name, known_in_advance=False) for feat_
↪ name in not_known_in_advance_features]
feature_settings += [dr.FeatureSettings(feat_name, do_not_derive=True) for feat_name,
↪ in do_not_derive_features]
spec = dr.DatetimePartitioningSpecification(
    # ...
    default_to_known_in_advance=True,
    feature_settings=feature_settings
)

```

Modeling Data and Time Series Features

In time series projects, a new set of modeling features is created after setting the partitioning options. If a featurelist is specified with the partitioning options, it will be used to select which features should be used to derived modeling features; if a featurelist is not specified, the default featurelist will be used.

These features are automatically derived from those in the project's dataset and are the features used for modeling - note that the Project methods `get_featurelists` and `get_modeling_featurelists` will return different data in time series projects. Modeling featurelists are the ones that can be used for modeling and will be accepted by the backend, while regular featurelists will continue to exist but cannot be used. Modeling features are only accessible once the target and partitioning options have been set. In projects that don't use time series modeling, once the target has been set, modeling and regular features and featurelists will behave the same.

Restoring Discarded Features

`datarobot.models.restore_discarded_features.DiscardedFeaturesInfo` can be used to get and restore features that have been removed by the time series feature generation and reduction functionality.

```

project = Project(project_id)
discarded_feature_info = project.get_discarded_features()
restored_features_info = project.restore_discarded_features(discarded_features_info.
↪ features)

```

Making Predictions

Prediction datasets are uploaded *as normal*. However, when uploading a prediction dataset, a new parameter `forecast_point` can be specified. The forecast point of a prediction dataset identifies the point in time relative which predictions should be generated, and if one is not specified when uploading a dataset, the server will choose the most recent possible forecast point. The forecast window specified when setting the partitioning options for the project determines how far into the future from the forecast point predictions should be calculated.

To simplify the predictions process, starting in version v2.20 a forecast point or prediction start and end dates can be specified when requesting predictions, instead of being specified at dataset upload. Upon uploading a dataset, DataRobot will calculate the range of dates available for use as a forecast point or for batch predictions. To that end, *Predictions* objects now also contain the following new fields:

- `forecast_point`: The default point relative to which predictions will be generated
- `predictions_start_date`: The start date for bulk historical predictions.
- `predictions_end_date`: The end date for bulk historical predictions.

Similar settings are provided as part of the *batch prediction API* and the *real-time prediction API* to make predictions using deployed time series models.

`datarobot.models.BatchPredictionJob.score`

When setting up a time series project, input features could be identified as known-in-advance features. These features are not used to generate lags, and are expected to be known for the rows in the forecast window at predict time (e.g. “how much money will have been spent on marketing”, “is this a holiday”).

Enough rows of historical data must be provided to cover the span of the effective Feature Derivation Window (which may be longer than the project’s Feature Derivation Window depending on the differencing settings chosen). The effective Feature Derivation Window of any model can be checked via the `effective_feature_derivation_window_start` and `effective_feature_derivation_window_end` attributes of a *DateTimeModel*.

When uploading datasets to a time series project, the dataset might look something like the following, where “Time” is the datetime partition column, “Target” is the target column, and “Temp.” is an input feature. If the dataset was uploaded with a forecast point of “2017-01-08” and the effective feature derivation window start and end for the model are -5 and -3 and the forecast window start and end were set to 1 and 3, then rows 1 through 3 are historical data, row 6 is the forecast point, and rows 7 through 9 are forecast rows that will have predictions when predictions are computed.

```
Row, Time, Target, Temp.
1, 2017-01-03, 16443, 72
2, 2017-01-04, 3013, 72
3, 2017-01-05, 1643, 68
4, 2017-01-06, ,
5, 2017-01-07, ,
6, 2017-01-08, ,
7, 2017-01-09, ,
8, 2017-01-10, ,
9, 2017-01-11, ,
```

On the other hand, if the project instead used “Holiday” as an a priori input feature, the uploaded dataset might look like the following:

```
Row, Time, Target, Holiday
1, 2017-01-03, 16443, TRUE
2, 2017-01-04, 3013, FALSE
3, 2017-01-05, 1643, FALSE
```

(continues on next page)

(continued from previous page)

```

4, 2017-01-06, , FALSE
5, 2017-01-07, , FALSE
6, 2017-01-08, , FALSE
7, 2017-01-09, , TRUE
8, 2017-01-10, , FALSE
9, 2017-01-11, , FALSE

```

Calendars

You can upload a *calendar file* containing a list of events relevant to your dataset. When provided, DataRobot automatically derives and creates time series features based on the calendar events (e.g., time until the next event, labeling the most recent event).

The calendar file:

- Should span the entire training data date range, as well as all future dates in which model will be forecasting.
- Must be in csv or xlsx format with a header row.
- Must have one date column which has values in the date-only format YYYY-MM-DD (i.e., no hour, month, or second).
- Can optionally include a second column that provides the event name or type.
- Can optionally include a series ID column which specifies which series an event is applicable to. This column name must match the name of the column set as the series ID.
 - Multiseries ID columns are used to add an ability to specify different sets of events for different series, e.g. holidays for different regions.
 - Values of the series ID may be absent for specific events. This means that the event is valid for all series in project dataset (e.g. New Year's Day is a holiday in all series in the example below).
 - If a multiseries ID column is not provided, all listed events will be applicable to all series in the project dataset.
- Cannot be updated in an active project. You must specify all future calendar events at project start. To update the calendar file, you will have to train a new project.

An example of a valid calendar file:

```

Date,      Name
2019-01-01, New Year's Day
2019-02-14, Valentine's Day
2019-04-01, April Fools
2019-05-05, Cinco de Mayo
2019-07-04, July 4th

```

An example of a valid multiseries calendar file:

```

Date,      Name,      Country
2019-01-01, New Year's Day,
2019-05-27, Memorial Day,   USA
2019-07-04, July 4th,      USA
2019-11-28, Thanksgiving,  USA
2019-02-04, Constitution Day, Mexico
2019-03-18, Benito Juárez's birth, Mexico
2019-12-25, Christmas Day,

```

Once created, a calendar can be used with a time series project by specifying the `calendar_id` field in the `datarobot.DatetimePartitioningSpecification` object for the project:

```
import datarobot as dr

# create the project
project = dr.Project.create('input_data.csv')
# create the calendar
calendar = dr.CalendarFile.create('calendar_file.csv')

# specify the calendar_id in the partitioning specification
datetime_spec = dr.DatetimePartitioningSpecification(
    use_time_series=True,
    datetime_partition_column='date'
    calendar_id=calendar.id
)

# As of v3.0, can use ``Project.set_datetime_partitioning`` instead of passing the_
↪spec into ``Project.analyze_and_model`` via ``partitioning_method``.
# The spec options can be passed individually:
project.set_datetime_partitioning(use_time_series=True, datetime_partition_column=
↪'date', calendar_id=calendar.id)
# Or the whole spec object can be passed:
project.set_datetime_partitioning(datetime_spec=datetime_spec)

# start the project, specifying the partitioning method (if ``Project.set_datetime_
↪partitioning`` was used there is no need to pass ``partitioning_method``)
project.analyze_and_model(
    target='project target',
    partitioning_method=datetime_spec
)
```

As of version v2.23 it is possible to ask DataRobot to generate a calendar file for you using `CalendarFile.create_calendar_from_country_code`. This method allows you to provide a country code specifying which country's holidays to use in generating the calendar, along with a start and end date indicating the bounds of the calendar. Allowed country codes can be retrieved using `CalendarFile.get_allowed_country_codes`. See the following code block for example usage:

```
import datarobot as dr
from datetime import datetime

# create the project
project = dr.Project.create('input_data.csv')
# retrieve the allowed country codes and use the first one
country_code = dr.CalendarFile.get_allowed_country_codes()[0]['code']
calendar = dr.CalendarFile.create_calendar_from_country_code(
    country_code, datetime(2018, 1, 1), datetime(2018, 7, 4)
)

# specify the calendar_id in the partitioning specification
datetime_spec = dr.DatetimePartitioningSpecification(
    use_time_series=True,
    datetime_partition_column='date'
    calendar_id=calendar.id
)

# As of v3.0, can use ``Project.set_datetime_partitioning`` instead of passing the_
↪spec into ``Project.analyze_and_model`` via ``partitioning_method``.
# The spec options can be passed individually:
```

(continues on next page)

(continued from previous page)

```

project.set_datetime_partitioning(use_time_series=True, datetime_partition_column=
↳ 'date', calendar_id=calendar.id)
# Or the whole spec object can be passed:
project.set_datetime_partitioning(datetime_spec=datetime_spec)

# start the project, specifying the partitioning method (if ``Project.set_datetime_
↳ partitioning`` was used there is no need to pass ``partitioning_method``)
project.analyze_and_model(
    target='project target',
    partitioning_method=datetime_spec
)

```

Datetime Trend Plots

As a version v2.25, it is possible to retrieve Datetime Trend Plots for time series models to estimate the accuracy of the model. This includes Accuracy over Time and Forecast vs Actual for supervised projects, and Anomaly over Time for unsupervised projects. You can retrieve respective plots using following methods:

- `DatetimeModel.get_accuracy_over_time_plot`
- `DatetimeModel.get_forecast_vs_actual_plot`
- `DatetimeModel.get_anomaly_over_time_plot`

By default, the plots would be automatically computed when accessed via retrieval methods. You can compute Datetime Trend Plots separately using a common method `DatetimeModel.compute_datetime_trend_plots`.

In addition, you can retrieve the respective detailed metadata for each plot type:

- `DatetimeModel.get_accuracy_over_time_plots_metadata`
- `DatetimeModel.get_forecast_vs_actual_plots_metadata`
- `DatetimeModel.get_anomaly_over_time_plots_metadata`

And the preview plots:

- `DatetimeModel.get_accuracy_over_time_plot_preview`
- `DatetimeModel.get_forecast_vs_actual_plot_preview`
- `DatetimeModel.get_anomaly_over_time_plot_preview`

Prediction Intervals

For each model, prediction intervals estimate the range of values DataRobot expects actual values of the target to fall within. They are similar to a confidence interval of a prediction, but are based on the residual errors measured during the backtesting for the selected model.

Note that because calculation depends on the backtesting values, prediction intervals are not available for predictions on models that have not had all backtests completed. To that end, note that creating a prediction with prediction intervals through the API will automatically complete all backtests if they were not already completed. For start-end retrained models, the parent model will be used for backtesting. Additionally, prediction intervals are not available when the number of points per forecast distance is less than 10, due to insufficient data.

In a prediction request, users can specify a prediction interval's size, which specifies the desired probability of actual values falling within the interval range. Larger values are less precise, but more conservative. For example,

specifying a size of 80 will result in a lower bound of 10% and an upper bound of 90%. More generally, for a specific `prediction_intervals_size`, the upper and lower bounds will be calculated as follows:

- `prediction_interval_upper_bound = 50% + (prediction_intervals_size / 2)`
- `prediction_interval_lower_bound = 50% - (prediction_intervals_size / 2)`

Prediction intervals can be calculated for a `DatetimeModel` using the `DatetimeModel.calculate_prediction_intervals` method. Users can also retrieve which intervals have already been calculated for the model using the `DatetimeModel.get_calculated_prediction_intervals` method.

To view prediction intervals data for a prediction, the prediction needs to have been created using the `DatetimeModel.request_predictions` method and specifying `include_prediction_intervals = True`. The size for the prediction interval can be specified with the `prediction_intervals_size` parameter for the same function, and will default to 80 if left unspecified. Specifying either of these fields will result in prediction interval bounds being included in the retrieved prediction data for that request (see the `Predictions` class for retrieval methods). Note that if the specified interval size has not already been calculated, this request will automatically calculate the specified size.

Prediction intervals are also supported for time series model deployments, and should be specified in deployment settings if desired. Use `Deployment.get_prediction_intervals_settings` to retrieve current prediction intervals settings for a deployment, and `Deployment.update_prediction_intervals_settings` to update prediction intervals settings for a deployment.

Prediction intervals are also supported for time series model export. See the optional `prediction_intervals_size` parameter in `Model.request_transferable_export` for usage.

Partial History Predictions

As of version v2.24 it is possible to ask DataRobot to allow to make predictions with incomplete historical data multi-series regression projects. To make predictions in regular project user has to provide enough data for the feature derivation. By setting the datetime partitioning attribute `allow_partial_history_time_series_predictions` to true (`datarobot.DatetimePartitioningSpecification` object), the project would be created that allow to make such predictions. The number of models are significantly smaller compared to regular multiseries model, but they are designed to make predictions on unseen series with reasonable accuracy.

External Baseline Predictions

As of version v2.26 it is possible to ask DataRobot to scale accuracy metric by external predictions. Users can upload data into a Dataset (see [Dataset documentation](#)) and compare the external time series predictions with DataRobot models' accuracy performance. To use the external predictions dataset in the autopilot, the dataset must be validated first (see `Project.validate_external_time_series_baseline`). Once the dataset is validated, it can be used with a time series project by specifying `external_time_series_baseline_dataset_id` field in `AdvancedOptions` and passes the advanced options to the project. See the following code block for example usage:

```
import datarobot as dr
from datarobot.helpers import AdvancedOptions
from datarobot.models import Dataset

# create the project
project = dr.Project.create('input_data.csv')

# prepare datetime partitioning for external baseline validation
```

(continues on next page)

(continued from previous page)

```

datetime_spec = dr.DatetimePartitioningSpecification(
    use_time_series=True,
    datetime_partition_column='date',
    multiseries_id_columns=['series_id'],
)
datetime_partitioning = dr.DatetimePartitioning.generate(
    project_id=project.id,
    spec=datetime_spec,
    target='target',
)

# create external baseline prediction dataset from local file
external_baseline_dataset = Dataset.create_from_file(file_path='external_predictions.
↪csv')

# validate the external baseline prediction dataset
validation_info = project.validate_external_time_series_baseline(
    catalog_version_id=external_baseline_dataset.version_id,
    target='target',
    datetime_partitioning=datetime_partitioning,
)
print(
    'External baseline predictions passes validation check:',
    validation_info.is_external_baseline_dataset_valid
)

# As of v3.0, can use ``Project.set_datetime_partitioning`` instead of passing the_
↪spec into ``Project.analyze_and_model`` via ``partitioning_method``.
# The spec options can be passed individually:
project.set_datetime_partitioning(use_time_series=True, datetime_partition_column=
↪'date', multiseries_id_columns=['series_id'])
# Or the whole spec object can be passed:
project.set_datetime_partitioning(datetime_spec=datetime_spec)

# As of v3.0, add the validated dataset version id into advanced options
project.set_options(
    external_time_series_baseline_dataset_id=external_baseline_dataset.version_id
)

# start the project, specifying the partitioning method (if ``Project.set_datetime_
↪partitioning`` and ``Project.set_options`` were not used)
project.analyze_and_model(
    target='target',
    partitioning_method=datetime_spec
    advanced_options=AdvancedOptions(external_time_series_baseline_dataset_id)
)

```

Time Series Data Prep

As of version v2.27 it is possible to prepare a dataset for time series modeling in the AI catalog using the API client. Users can upload unprepped modeling data into a Dataset (see [Dataset documentation](#)) and then prep the data set for time series modeling by aggregating data to a regular time step and filling gaps via a generated Spark SQL query in the AI catalog. Once the dataset is uploaded, the time series data prep query generator can be created using `DataEngineQueryGenerator.create`. As of version v3.1 convenience methods have been added to streamline the process of applying time series data prep for predictions. See the following code block for example usage:

```

import datarobot as dr
from datarobot.models.data_engine_query_generator import (
    QueryGeneratorDataset,
    QueryGeneratorSettings,
)
from datetime import datetime

# upload the dataset to the AI Catalog
dataset = dr.Dataset.create_from_file('input_data.csv')

# create a time series data prep query generator
query_generator_dataset = QueryGeneratorDataset(
    alias='input_data_csv',
    dataset_id=dataset.id,
    dataset_version_id=dataset.version_id,
)
query_generator_settings = QueryGeneratorSettings(
    datetime_partition_column="date",
    time_unit="DAY",
    time_step=1,
    default_numeric_aggregation_method="sum",
    default_categorical_aggregation_method="mostFrequent",
    target="y",
    multiseries_id_columns=["id"],
    default_text_aggregation_method="concat",
    start_from_series_min_datetime=True,
    end_to_series_max_datetime=True,
)
query_generator = dr.DataEngineQueryGenerator.create(
    generator_type='TimeSeries',
    datasets = [query_generator_dataset],
    generator_settings=query_generator_settings,
)

# prep the training dataset
training_dataset = query_generator.create_dataset()

# create a project
project = dr.Project.create_from_dataset(training_dataset.id, project_name='prepped_
↳dataset')

# set up datetime partitioning, target, and train model(s)
partitioning_spec = dr.DatetimePartitioningSpecification(
    datetime_partition_column='date', use_time_series=True
)
project.analyze_and_model(target='y', mode='manual', partitioning_method=partitioning_
↳spec)
blueprints = project.get_blueprints()
model_job = project.train_datetime(blueprints[0].id)
model = model_job.get_result_when_complete()

# query generator can be retrieved from the project if necessary
# query_generator = dr.DataEngineQueryGenerator.get(project.query_generator_id)

# prep and upload a prediction dataset to the project
prediction_dataset = query_generator.prepare_prediction_dataset(
    'prediction_data.csv', project.id

```

(continues on next page)

(continued from previous page)

```

)

# make predictions within the project
# Either forecast point or predictions start/end dates must be specified
model.request_predictions(prediction_dataset.id, forecast_point=datetime(2023, 1, 1))

# query generator can be retrieved from a deployed model via project if necessary
# deployment = dr.Deployment.get(deployment_id)
# project = dr.Project.get(deployment.model['project_id'])
# query_generator = dr.DataEngineQueryGenerator.get(project.query_generator_id)

# Deploy the model
prediction_servers = dr.PredictionServer.list()
deployment = dr.Deployment.create_from_learning_model(
    model.id, 'prepped_deployment', default_prediction_server_id=prediction_
↪servers[0].id
)

# Make batch predictions from batch prediction job, supports localFile or dataset for_
↪intake
# and all types for output
timeseries_settings = {'type': 'forecast', 'forecast_point': datetime(2023, 1, 1)}
intake_settings = {'type': 'localFile', 'file': 'prediction_data.csv'}
output_settings = {'type': 'localFile', 'path': 'predictions_out.csv'}
batch_predictions_job = dr.BatchPredictionJob.apply_time_series_data_prep_and_score(
    deployment, intake_settings, timeseries_settings, output_settings=output_settings
)

```

Visual AI Projects

With Visual AI, DataRobot allows you to use image data for modeling. You can create projects with one or multiple image features and also mix them with other DataRobot-supported feature types. You can find more information about [Visual AI](#) in the Platform documentation.

Create a Visual AI Project

DataRobot offers you different ways to prepare your dataset and to start a Visual AI project. The various ways to do this are covered in detail in the documentation, [Preparing the dataset](#).

For the examples given here the images are partitioned into named directories. In the following, images are partitioned into named directories, which serve as labels for the project. For example, to predict on images of cat and dog breeds, labels could be `abyssinian`, `american_bulldog`, etc.

```

/home/user/data/imagedataset
  abyssinian
    abyssinian01.jpg
    abyssinian02.jpg
  american_bulldog
    american_bulldog01.jpg
    american_bulldog02.jpg

```

You then compress the directory containing the named directories into a ZIP file, creating the dataset used for the project.

```
from datarobot.models import Project, Dataset
dataset = Dataset.create_from_file(file_path='/home/user/data/imagdataset.zip')
project = Project.create_from_dataset(dataset.id, project_name='My Image Project')
```

Target

Since this example uses named directories the target name must be `class`, which will contain the name of each directory in the ZIP file.

Other Parameters

Setting modeling parameters, such as partitioning method, queue mode, etc, functions in the same way as starting a non-image project.

Start Modeling

Once you have set modeling parameters, use the following code snippet to specify parameters and start the modeling process.

```
from datarobot import AUTOPILOT_MODE
project.analyze_and_model(target='class', mode=AUTOPILOT_MODE.QUICK)
```

You can also pass optional parameters to `project.analyze_and_model` to change aspects of the modeling process. Some of those parameters include:

- `worker_count` – int, sets the number of workers used for modeling.
- `partitioning_method` – `PartitioningMethod` object.

For a full reference of available parameters, see [Project.analyze_and_model](#).

You can use the `mode` parameter to set the Autopilot mode. `AUTOPILOT_MODE.FULL_AUTO`, is the default, triggers modeling with no further actions necessary. Other accepted modes include `AUTOPILOT_MODE.MANUAL` for manual mode (choose your own models to run rather than running the full Autopilot) and `AUTOPILOT_MODE.QUICK` to run on a more limited set of models and get insights more quickly (‘‘quick run’’).

Interact with a Visual AI Project

The following code snippets may be used to access Visual AI images and insights.

List Sample Images

Sample images allow you to see a subset of images, chosen by DataRobot, in the dataset. The returned `SampleImage` objects have an associated `target_value` that will allow you to categorize the images (abyssinian, american_bulldog, etc). Until you set the target and EDA2 has finished, the `target_value` will be `None`.

```
import io
import PIL.Image

from datarobot.models.visualai import SampleImage

column_name = "image"
number_of_images_to_show = 5

for sample in SampleImage.list(project.id, column_name)[:number_of_images_to_show]:
    # Display the image in the GUI
    bio = io.BytesIO(sample.image.image_bytes)
    img = PIL.Image.open(bio)
    img.show()
```

The results would be images such as:



List Duplicate Images

Duplicate images, images with different names but are determined by DataRobot to be the same, may exist in a dataset. If this happens, the code returns one of the images and the number of times it occurs in the dataset.

```

from datarobot.models.visualai import DuplicateImage

column_name = "image"

for duplicate in DuplicateImage.list(project.id, column_name):
    # To show an image see the previous sample image example
    print(f"Image id = {duplicate.image.id} has {duplicate.count} duplicates")

```

Activation Maps

Activation maps are overlaid on the images to show which image areas are driving model prediction decisions.

Detailed explanations are available in DataRobot Platform documentation, [Model insights](#).

Compute Activation Maps

To begin, you must first compute activation maps. The following snippet is an example of starting the computation for a Keras model in a Visual AI project. The `compute` method returns a URL that can be used to determine when the computation completes.

```

from datarobot.models.visualai import ImageActivationMap

keras_model = project.get_models(search_params={'name': 'Keras'})[0]

status_url = ImageActivationMap.compute(project.id, keras_model.id)
print(status_url)

```

List Activation Maps

After activation maps are computed, you can download them from the DataRobot server. The following snippet is an example of how to get the activation maps and how to plot them.

```

import PIL.Image
from datarobot.models.visualai import ImageActivationMap

column_name = "image"
max_activation_maps = 5
keras_model = project.get_models(search_params={'name': 'Keras'})[0]

for activation_map in ImageActivationMap.list(project.id, keras_model.id, column_
↪name)[:max_activation_maps]:
    bio = io.BytesIO(activation_map.overlay_image.image_bytes)
    img = PIL.Image.open(bio)
    img.show()

```



Image Embeddings

Image embeddings allow you to get an impression on how similar two images look to a featurizer network. The embeddings project images from their high-dimensional feature space onto a 2D plane. The closer the images appear in this plane, the more similar they look to the featurizer.

Detailed explanations are available in the DataRobot Platform documentation, [Model insights](#).

Compute Image Embeddings

You must compute image embeddings before retrieving. The following snippet is an example of starting the computation for a Keras model in our Visual AI project. The `compute` method returns a URL that can be used to determine when the computation is complete.

```
from datarobot.models.visualai import ImageEmbedding

keras_model = project.get_models(search_params={'name': 'Keras'})[0]
```

(continues on next page)

(continued from previous page)

```
status_url = ImageEmbedding.compute(project.id, keras_model.id)
print(status_url)
```

List Image Embeddings

After image embeddings are computed, you can download them from the DataRobot server. The following snippet is an example of how to get the embeddings for a model and plot them.

```
from matplotlib.offsetbox import OffsetImage, AnnotationBbox
import matplotlib.pyplot as plt
import numpy as np
import PIL.Image

from datarobot.models.visualai import ImageEmbedding

column_name = "image"
keras_model = project.get_models(search_params={'name': 'Keras'})[0]
zoom = 0.15

fig, ax = plt.subplots(figsize=(15,10))
for image_embedding in ImageEmbedding.list(project.id, keras_model.id, column_name):
    image_bytes = image_embedding.image.image_bytes
    x_position = image_embedding.position_x
    y_position = image_embedding.position_y
    image = PIL.Image.open(io.BytesIO(image_bytes))
    offset_image = OffsetImage(np.array(image), zoom=zoom)
    annotation_box = AnnotationBbox(offset_image, (x_position, y_position), xycoords=
↪'data', frameon=False)
    ax.add_artist(annotation_box)
    ax.update_datalim([(x_position, y_position)])
ax.autoscale()
ax.grid(True)
fig.show()
```

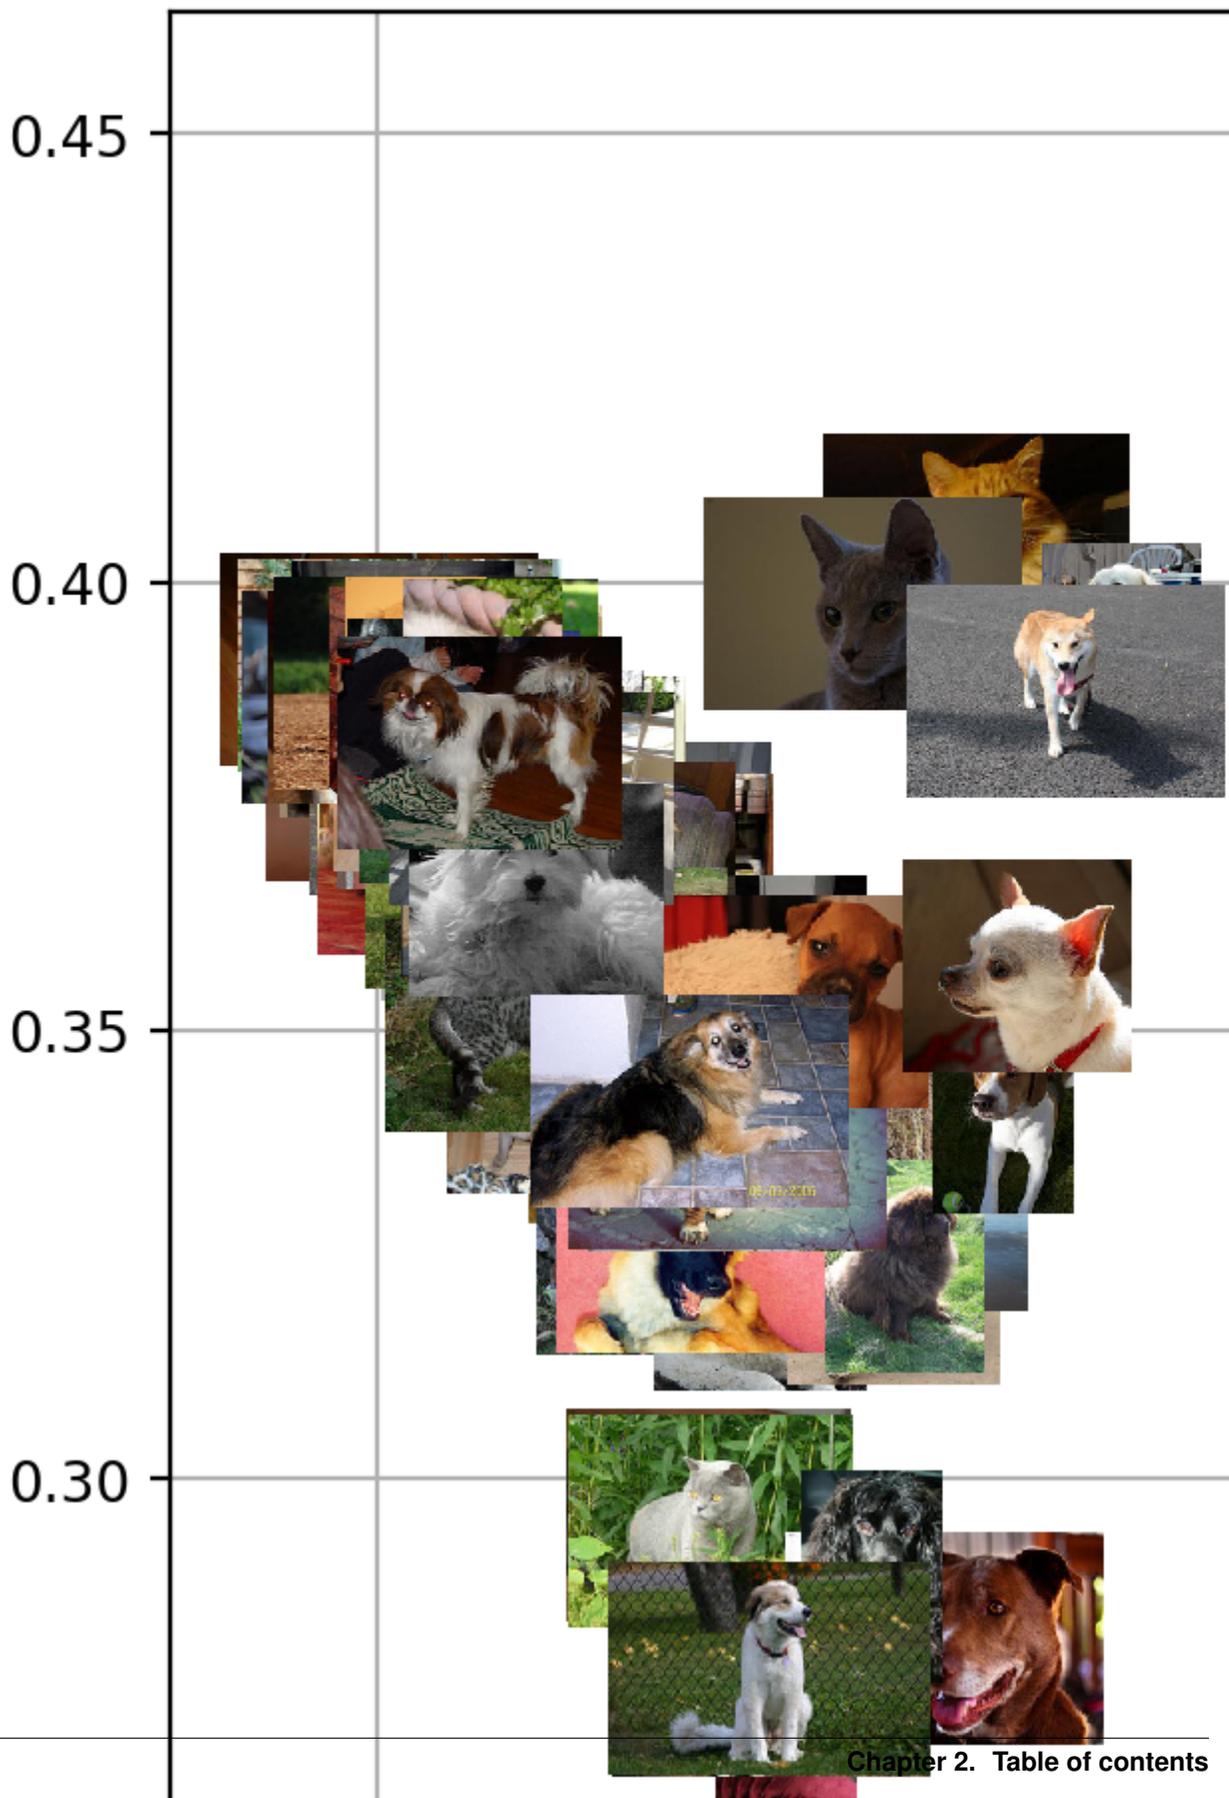


Image Augmentation

Image Augmentation is a processing step in the DataRobot blueprint that creates new images for training by randomly transforming existing images, thereby increasing the size of (i.e., *augmenting*) the training data.

Detailed explanations are available in the DataRobot Platform documentation, [Creating augmented models](#).

Create Image Augmentation List

To create image augmentation samples, you need to provide an image augmentation list. This list holds all information required to compute image augmentation samples. The following snippet shows how to create an image augmentation list. It is then used to compute image augmentation samples.

```
from datarobot.models.visualai import ImageAugmentationList

blur_param = {"name": "maximum_filter_size", "currentValue": 10}
blur = {"name": "blur", "params": [blur_param]}
flip = {"name": "horizontal_flip", "params": []}

image_augmentation_list = ImageAugmentationList.create(
    name="my blur and flip augmentation list",
    project_id=project.id,
    feature_name="image",
    transformation_probability=0.5,
    number_of_new_images=5,
    transformations=[blur, flip],
)

print(image_augmentation_list)
```

List Image Augmentation Lists

You can retrieve all available augmentation lists for a project by `project_id`.

```
from datarobot.models.visualai import ImageAugmentationList

image_augmentation_lists = ImageAugmentationList.list(
    project_id=project.id
)

print(image_augmentation_lists)
```

Compute and Retrieve Image Augmentation Samples

You must compute image augmentation samples before retrieving. To compute image augmentation sample, you will need an image augmentation list. This list holds all parameters and transformation information needed to compute samples. You can either create a new one or retrieve an existing one.

The following snippet is an example of computing and retrieving image augmentation samples. It uses the previous snippet that creates an image augmentation list, but instead uses it to compute and retrieve image augmentation samples using the `compute_samples` method.

```
from datarobot.models.visualai import ImageAugmentationList, ImageAugmentationSample

image_augmentation_list = ImageAugmentationList.get('<image_augmentation_list_id>')

for sample in image_augmentation_list.compute_samples():
    # Display the image in popup windows
    bio = io.BytesIO(sample.image.image_bytes)
    img = PIL.Image.open(bio)
    img.show()
```

List Image Augmentation Samples

If image augmentation samples were already computed instead of recomputing them we can retrieve the last sample that was computed for image augmentation list from DataRobot server. The following snippet is an example of how to get the image augmentation samples.

```
import io
import PIL.Image
from datarobot.models.visualai import ImageAugmentationList

image_augmentation_list = ImageAugmentationList.get('<image_augmentation_list_id>')

for sample in image_augmentation_list.retrieve_samples():
    # Display the image in popup windows
    bio = io.BytesIO(sample.image.image_bytes)
    img = PIL.Image.open(bio)
    img.show()
```

Configure Augmentations to Use During Training

In order to automatically augment a dataset during training the DataRobot server will look for an augmentation list associated with the project that has the key *initial_list* set to *True*. An augmentation list like this can be created with the following code snippet. If it is created for the project before autopilot is started, it will be used to automatically augment the images in the training dataset.

```
from datarobot.models.visualai import ImageAugmentationList

blur_param = {"name": "maximum_filter_size", "currentValue": 10}
blur = {"name": "blur", "params": [blur_param]}
flip = {"name": "horizontal_flip", "params": []}
transforms_to_apply = ImageAugmentationList.create(name="blur and scale", project_
↪id=project.id,
    feature_name='image', transformation_probability=0.5, number_of_new_images=5,
    transformations=[blur, flip], initial_list=True)
```

Determine Available Transformations for Augmentations

The Augmentation List in the example above supports horizontal flip and blur transformations, but DataRobot supports several other transformations. To retrieve the list of supported transformations use the *ImageAugmentationOptions* object as the example below shows.

```
from datarobot.models.visualai import ImageAugmentationOptions
options = ImageAugmentationOptions.get(project.id)
```

Converting images to base64-encoded strings for predictions

If your training dataset contained images, images in the prediction dataset need to be converted to a base64-encoded strings so it can be fully contained in the prediction request (for example, in a CSV file or JSON). For more detail, see: *working with binary data*

License

For the examples here we used the [The Oxford-IIIT Pet Dataset](#) licensed under [Creative Commons Attribution-ShareAlike 4.0 International License](#)

Unsupervised Projects (Anomaly Detection)

When the data is not labelled and the problem can be interpreted either as anomaly detection or time series anomaly detection, projects in unsupervised mode become useful.

Creating Unsupervised Projects

In order to create an unsupervised project set `unsupervised_mode` to `True` when setting the target.

```
>>> import datarobot as dr
>>> project = Project.create('dataset.csv', project_name='unsupervised')
>>> project.analyze_and_model(unsupervised_mode=True)
```

Creating Time Series Unsupervised Projects

To create a time series unsupervised project pass `unsupervised_mode=True` to `datetime` partitioning creation and to `project aim`. The forecast window will be automatically set to `nowcasting`, i.e. forecast distance zero (`FW = 0, 0`).

```
>>> import datarobot as dr
>>> project = Project.create('dataset.csv', project_name='unsupervised')
>>> spec = DatetimePartitioningSpecification('date',
...     use_time_series=True, unsupervised_mode=True,
...     feature_derivation_window_start=-4, feature_derivation_window_end=0)

# this step is optional - preview the default partitioning which will be applied
>>> partitioning_preview = DatetimePartitioning.generate(project.id, spec)
>>> full_spec = partitioning_preview.to_specification()

# As of v3.0, can use ``Project.set_datetime_partitioning`` and ``Project.list_
↪datetime_partitioning_spec`` instead
>>> project.set_datetime_partitioning(datetime_partition_spec=spec)
>>> project.list_datetime_partitioning_spec()
```

(continues on next page)

(continued from previous page)

```
# If ``Project.set_datetime_partitioning`` was used there is no need to pass_
↳ ``partitioning_method`` in ``Project.analyze_and_model``
>>> project.analyze_and_model(unsupervised_mode=True, partitioning_method=full_spec)
```

Unsupervised Project Metrics

In unsupervised projects, metrics are not used for the model optimization. Instead, they are used for the purpose of model ranking. There are two available unsupervised metrics – Synthetic AUC and synthetic LogLoss – both of which are calculated on artificially-labelled validation samples.

Estimating Accuracy of Unsupervised Anomaly Detection Datetime Partitioned Models

For datetime partitioned unsupervised model you can retrieve the Anomaly over Time plot. To do so use `DatetimeModel.get_anomaly_over_time_plot`. You can also retrieve the detailed meta-data using `DatetimeModel.get_anomaly_over_time_plots_metadata`, and the preview plot using `DatetimeModel.get_anomaly_over_time_plot_preview`.

Explaining Unsupervised Time Series Anomaly Detection Models Predictions

Within a timeseries unsupervised project for models supporting calculation of Shapley values, Anomaly Assessment insight can be computed to explain anomalies.

Example 1: computation, retrieval and deletion of the anomaly assessment insight.

```
>>> import datarobot as dr
# Initialize Anomaly Assessment for the backtest 0, training subset and series
↳ "series1"
>>> model = dr.DatetimeModel.get(project_id, model_id)
>>> anomaly_assessment_record = model.initialize_anomaly_assessment(0, "training",
↳ "series1")
# Get available Anomaly Assessment for the project and model
>>> all_records = model.get_anomaly_assessment_records()
# Get most recent anomaly assessment explanations
>>> all_records[0].get_latest_explanations()
# Get anomaly assessment explanations in the range
>>> all_records[0].get_explanations(start_date="2020-01-01", points_count=500)
# Get anomaly assessment predictions preview
>>> all_records[0].get_predictions_preview()
# Delete record
>>> all_records[0].delete()
```

Example 2: Find explanations for the anomalous regions (regions with maximum anomaly score ≥ 0.6) for the multi-series project. Leave only explanations for the rows with anomaly score ≥ 0.5 .

```
>>> def collect_explanations(model, backtest, source, series_ids):
...     for series in series_ids:
...         try:
...             model.initialize_anomaly_assessment(backtest, source, series)
...             except ClientError:
...                 # when insight was already computed
...                 pass
...     records_for_series = model.get_anomaly_assessment_records(source=source,
↳ backtest=backtest, with_data_only=True, limit=0)
```

(continues on next page)

(continued from previous page)

```

... result = {}
... for record in records_for_series:
...     preview = record.get_predictions_preview()
...     anomalous_regions = preview.find_anomalous_regions(max_prediction_threshold=0.
↪6)
...     if anomalous_regions:
...         result[record.series_id] = record.get_explanations_data_in_
↪regions(anomalous_regions, prediction_threshold=0.5)
...     return result
>>> import datarobot as dr
>>> model = dr.DatetimeModel.get(project_id, model_id)
>>> collect_explanations(model, 0, "validation", series_ids)

```

Assessing Unsupervised Anomaly Detection Models on External Test Set

In unsupervised projects, if there is some labelled data, it may be used to assess anomaly detection models by checking computed classification metrics such as AUC and LogLoss, etc. and insights such as ROC and Lift. Such data is uploaded as a prediction dataset with a specified actual value column name, and, if it is a time series project, a prediction date range. The actual value column can contain only zeros and ones or True/False, and it should not have been seen during training time.

Requesting External Scores and Insights (Time Series)

There are two ways to specify an actual value column and compute scores and insights:

1. Upload a prediction dataset, specifying `predictions_start_date`, `predictions_end_date`, and `actual_value_column`, and request predictions on that dataset using a specific model.

```

>>> import datarobot as dr
# Upload dataset
>>> project = dr.Project(project_id)
>>> dataset = project.upload_dataset(
...     './data_to_predict.csv',
...     predictions_start_date=datetime(2000, 1, 1),
...     predictions_end_date=datetime(2015, 1, 1),
...     actual_value_column='actuals'
... )
# run prediction job which also will calculate requested scores and insights.
>>> predict_job = model.request_predictions(dataset.id)
# prediction output will have column with actuals
>>> result = pred_job.get_result_when_complete()

```

2. Upload a prediction dataset without specifying any options, and request predictions for a specific model with `predictions_start_date`, `predictions_end_date`, and `actual_value_column` specified. Note, these settings cannot be changed for the dataset after making predictions.

```

>>> import datarobot as dr
# Upload dataset
>>> project = dr.Project(project_id)
>>> dataset = project.upload_dataset('./data_to_predict.csv')
# Check which columns are candidates for actual value columns
>>> dataset.detected_actual_value_columns
[{'missing_count': 25, 'name': 'label_column'}]

```

(continues on next page)

(continued from previous page)

```
# run prediction job which also will calculate requested scores and insights.
>>> predict_job = model.request_predictions(
...     dataset.id,
...     predictions_start_date=datetime(2000, 1, 1),
...     predictions_end_date=datetime(2015, 1, 1),
...     actual_value_column='label_column'
... )
>>> result = pred_job.get_result_when_complete()
```

Requesting External Scores and Insights for AutoML models

To compute scores and insights on an external dataset for unsupervised AutoML models (Non Time series)

Upload a prediction dataset that contains label column(s), request compute external test on one of `PredictionDataset.detected_actual_value_columns`

```
import datarobot as dr
# Upload dataset
project = dr.Project(project_id)
dataset = project.upload_dataset('./test_set.csv')
dataset.detected_actual_value_columns
>>>['label_column_1', 'label_column_2']
# request external test to compute metric scores and insights on dataset
external_test_job = model.request_external_test(dataset.id, actual_value_column=
↳ 'label_column_1')
# once job is complete, scores and insights are ready for retrieving
external_test_job.wait_for_completion()
```

Retrieving External Scores and Insights

Upon completion of prediction, external scores and insights can be retrieved to assess model performance. For unsupervised projects Lift Chart and ROC Curve are computed. If the dataset is too small insights will not be computed. If the actual value column contained only one class, the ROC Curve will not be computed. Information about the dataset can be retrieved using `PredictionDataset.get`.

```
>>> import datarobot as dr
# Check which columns are candidates for actual value columns
>>> scores_list = ExternalScores.list(project_id)
>>> scores = ExternalScores.get(project_id, dataset_id=dataset_id, model_id=model_id)
>>> lift_list = ExternalLiftChart.list(project_id, model_id)
>>> roc = ExternalRocCurve.get(project_id, model, dataset_id)
# check dataset warnings, need to be called after predictions are computed.
>>> dataset = PredictionDataset.get(project_id, dataset_id)
>>> dataset.data_quality_warnings
{'single_class_actual_value_column': True,
'insufficient_rows_for_evaluating_models': False,
'has_kia_missing_values_in_forecast_window': False}
```

Unsupervised Projects (Clustering)

Use clustering when data is not labelled and the problem can be interpreted as grouping a set of objects in such a way that objects in the same group (called a cluster) are more similar to each other than to those in other groups (clusters). It is a common task in data exploration when finding groups and similarities is needed.

Creating Unsupervised Projects

To create an unsupervised project, set `unsupervised_mode` to `True` when setting the target. To specify clustering, set `unsupervised_type` to `CLUSTERING`. When setting the modeling mode is required, clustering supports either `AUTOPILOT_MODE.COMPREHENSIVE` for DataRobot-run Autopilot or `AUTOPILOT_MODE.MANUAL` for user control of which models/parameters to use.

Example:

```
from datarobot import Project
from datarobot.enums import UnsupervisedTypeEnum
from datarobot.enums import AUTOPILOT_MODE

project = Project.create("dataset.csv", project_name="unsupervised clustering")
project.analyze_and_model(
    unsupervised_mode=True,
    mode=AUTOPILOT_MODE.COMPREHENSIVE,
    unsupervised_type=UnsupervisedTypeEnum.CLUSTERING,
)
```

You can optionally specify list of explicit cluster numbers. To do this, pass a list of integer values to optional `autopilot_cluster_list` parameter using the `analyze_and_model()` method.

```
project.analyze_and_model(
    unsupervised_mode=True,
    mode=AUTOPILOT_MODE.COMPREHENSIVE,
    unsupervised_type=UnsupervisedTypeEnum.CLUSTERING,
    autopilot_cluster_list=[7, 9, 11, 15, 19],
)
```

You can also do both in one step using the `Project.start()` method. This method by default will use `AUTOPILOT_MODE.COMPREHENSIVE` mode.

```
from datarobot import Project
from datarobot.enums import UnsupervisedTypeEnum

project = Project.start(
    "dataset.csv",
    unsupervised_mode=True,
    project_name="unsupervised clustering project",
    unsupervised_type=UnsupervisedTypeEnum.CLUSTERING,
)
```

Unsupervised Clustering Project Metric

Unsupervised clustering projects use the `Silhouette Score` metric for model ranking (instead of using it for model optimization). It measures the average similarity of objects within a cluster and their distance to the other objects in the other clusters.

Retrieving information about Clusters

In a trained model, you can retrieve information about clusters in along with standard model information. To do this, when training completes, retrieve a model and view basic clustering information:

- `n_clusters` : number of clusters for model
- `is_n_clusters_dynamically_determined` : how clustering model picks number of clusters

Here is a code snippet to retrieve information about the number of clusters for model:

```
from datarobot import ClusteringModel
model = ClusteringModel.get(project_id, model_id)
print("{} clusters found".format(model.n_clusters))
```

You can retrieve more details about clusters and their data using cluster insights.

Working with Clusters Insights

You can compute insights to gain deep insights into clusters and their characteristics. This process will perform calculations and return detailed information about each feature and its importance, as well as a detailed per-cluster breakdown.

To compute and retrieve cluster insights, use the `ClusteringModel` and its `compute_insights` method. The method starts the cluster insights compute job, waits for its completion for the number of seconds specified in the optional parameter `max_wait` (default: 600), and returns results when insights are ready.

If clusters are already computed, access them using the `insights` property of the `ClusteringModel` method.

```
from datarobot import ClusteringModel
model = ClusteringModel.get(project_id, model_id)
insights = model.compute_insights()
```

This call, with the specified `wait_time`, will run and wait for specified time:

```
from datarobot import ClusteringModel
model = ClusteringModel.get(project_id, model_id)
insights = model.compute_insights(max_wait=60)
```

If computation fails to finish before `max_wait` expires, the method will raise an `AsyncTimeoutError`. You can retrieve cluster insights after jobs computation finishes.

To retrieve cluster insights already computed:

```
from datarobot import ClusteringModel
model = ClusteringModel.get(project_id, model_id)
for insight in model.insights:
    print(insight)
```

Working with Clusters

By default, DataRobot names clusters `Cluster 1`, `Cluster 2`, ..., `Cluster N`. You can retrieve these names and alter them according to preference. When retrieving clusters before computing insights, clusters will contain only names. After insight computation completes, each cluster will also hold information about the percentage of data that is represented by the Cluster.

For example:

```

from datarobot import ClusteringModel
model = ClusteringModel.get(project_id, model_id)

# helper function
def print_summary(name, percent):
    if not percent:
        percent = "?"
    print("'{}' holds {} % of data".format(name, percent))

for cluster in model.clusters:
    print_summary(cluster.name, cluster.percent)
model.compute_insights()
for cluster in model.clusters:
    print_summary(cluster.name, cluster.percent)

```

For a model with three clusters, the code snippet will output:

```

'Cluster 1' holds ? % of data
'Cluster 2' holds ? % of data
'Cluster 3' holds ? % of data
-- Cluster insights computation finished --
'Cluster 1' holds 27.1704180064 % of data
'Cluster 2' holds 36.9131832797 % of data
'Cluster 3' holds 35.9163987138 % of data

```

Use the following methods of **ClusteringModel** class to alter cluster names:

- `update_cluster_names` - changes multiple cluster names using mapping in dictionary
- `update_cluster_name` - changes one cluster name

After update, each method will return a list of clusters with changed names.

For example:

```

from datarobot import ClusteringModel
model = ClusteringModel.get(project_id, model_id)

# update multiple
cluster_name_mappings = [
    ("Cluster 1", "AAA"),
    ("Cluster 2", "BBB"),
    ("Cluster 3", "CCC")
]
clusters = model.update_cluster_names(cluster_name_mappings)

# update single
clusters = model.update_cluster_name("CCC", "DDD")

```

Clustering Classes Reference

ClusteringModel

```
class datarobot.models.model.ClusteringModel (id=None, processes=None, featurerlist_name=None, featurerlist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, model_type=None, model_category=None, is_frozen=None, is_n_clusters_dynamically_determined=None, blueprint_id=None, metrics=None, project=None, monotonic_increasing_featurerlist_id=None, monotonic_decreasing_featurerlist_id=None, n_clusters=None, has_empty_clusters=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, model_number=None, parent_model_id=None, use_project_settings=None, supports_composable_ml=None)
```

ClusteringModel extends `Model` class. It provides provides properties and methods specific to clustering projects.

compute_insights (*max_wait*: int = 600) → List[datarobot.models.cluster_insight.ClusterInsight]

Compute and retrieve cluster insights for model. This method awaits completion of job computing cluster insights and returns results after it is finished. If computation takes longer than specified *max_wait* exception will be raised.

Parameters

project_id: str Project to start creation in.

model_id: str Project's model to start creation in.

max_wait: int Maximum number of seconds to wait before giving up

Returns

List of ClusterInsight

Raises

ClientError Server rejected creation due to client error. Most likely cause is bad `project_id` or `model_id`.

AsyncFailureError If any of the responses from the server are unexpected

AsyncProcessUnsuccessfulError If the cluster insights computation has failed or was cancelled.

AsyncTimeoutError If the cluster insights computation did not resolve in time

insights

Return actual list of cluster insights if already computed.

Returns

List of ClusterInsight**clusters**

Return actual list of Clusters.

Returns**List of Cluster**

update_cluster_names (*cluster_name_mappings*: *List[Tuple[str, str]]*) → *List[datarobot.models.cluster.Cluster]*

Change many cluster names at once based on list of name mappings.

Parameters

cluster_name_mappings: List of tuples Cluster names mapping consisting of current cluster name and old cluster name. Example:

```
cluster_name_mappings = [
    ("current cluster name 1", "new cluster name 1"),
    ("current cluster name 2", "new cluster name 2")]
```

Returns**List of Cluster****Raises**

datarobot.errors.ClientError Server rejected update of cluster names. Possible reasons include: incorrect format of mapping, mapping introduces duplicates.

update_cluster_name (*current_name*: *str*, *new_name*: *str*) → *List[datarobot.models.cluster.Cluster]*

Change cluster name from *current_name* to *new_name*.

Parameters

current_name: str Current cluster name.

new_name: str New cluster name.

Returns**List of Cluster****Raises**

datarobot.errors.ClientError Server rejected update of cluster names.

Cluster

class `datarobot.models.model.Cluster` (**kwargs)

Representation of a single cluster.

Attributes

name: str Current cluster name

percent: float Percent of data contained in the cluster. This value is reported after cluster insights are computed for the model.

classmethod list (*project_id*: *str*, *model_id*: *str*) → *List[datarobot.models.cluster.Cluster]*

Retrieve a list of clusters in the model.

Parameters

project_id: str ID of the project that the model is part of.

model_id: str ID of the model.

Returns

List of clusters

```
classmethod update_multiple_names (project_id: str, model_id: str, cluster_name_mappings: List[Tuple[str, str]]) → List[datarobot.models.cluster.Cluster]
```

Update many clusters at once based on list of name mappings.

Parameters

project_id: str ID of the project that the model is part of.

model_id: str ID of the model.

cluster_name_mappings: List of tuples Cluster name mappings, consisting of current and previous names for each cluster. Example:

```
cluster_name_mappings = [  
    ("current cluster name 1", "new cluster name 1"),  
    ("current cluster name 2", "new cluster name 2")]
```

Returns

List of clusters

Raises

datarobot.errors.ClientError Server rejected update of cluster names.

ValueError Invalid cluster name mapping provided.

```
classmethod update_name (project_id: str, model_id: str, current_name: str, new_name: str) → List[datarobot.models.cluster.Cluster]
```

Change cluster name from `current_name` to `new_name`

Parameters

project_id: str ID of the project that the model is part of.

model_id: str ID of the model.

current_name: str Current cluster name

new_name: str New cluster name

Returns

List of Cluster

ClusterInsight

```
class datarobot.models.model.ClusterInsight (**kwargs)
```

Holds data on all insights related to feature as well as breakdown per cluster.

Parameters

feature_name: str Name of a feature from the dataset.

feature_type: str Type of feature.

insights [List of classes (ClusterInsight)] List provides information regarding the importance of a specific feature in relation to each cluster. Results help understand how the model is grouping data and what each cluster represents.

feature_impact: float Impact of a feature ranging from 0 to 1.

classmethod compute (*project_id: str, model_id: str, max_wait: int = 600*) → List[datarobot.models.cluster_insight.ClusterInsight]

Starts creation of cluster insights for the model and if successful, returns computed ClusterInsights. This method allows calculation to continue for a specified time and if not complete, cancels the request.

Parameters

project_id: str ID of the project to begin creation of cluster insights for.

model_id: str ID of the project model to begin creation of cluster insights for.

max_wait: int Maximum number of seconds to wait canceling the request.

Returns

List[ClusterInsight]

Raises

ClientError Server rejected creation due to client error. Most likely cause is bad `project_id` or `model_id`.

AsyncFailureError Indicates whether any of the responses from the server are unexpected.

AsyncProcessUnsuccessfulError Indicates whether the cluster insights computation failed or was cancelled.

AsyncTimeoutError Indicates whether the cluster insights computation did not resolve within the specified time limit (`max_wait`).

Segmented Modeling Projects

Many *time series* multiserries projects introduce complex forecasting use cases that require using different models for subsets of series (i.e., sales of groceries and clothing can be very different). Within the segmented modeling framework, DataRobot runs multiple time series projects (one per segment / group of series), selects the best models for each segment, and then combines those models to make predictions.

Segment

A segment is a group of series in a multiserries project. For example, given `store` and `country` columns in dataset, you can use the former as the series identifier and the latter as the segment identifier. For the best results, group series with similar patterns into segments (instead of random selection).

Segmentation Task

A segmentation task is an entity that defines how input dataset is partitioned. Currently only user-defined segmentation is supported. That is, the dataset must have a separate column that is used to identify segment (and the user must select it). All records within a series must have the same segment identifier.

Combined Model

A combined model in a segmented modeling project can be thought of as a meta-model made of references to the best model within each segment. While being quite different from a standard DataRobot model in its creation, its use is very much the same after the model is complete (for example, deploying or making predictions).

The following examples illustrate how to set up, run, and manage a segmented modeling project using the Python public API client. For details please refer to [Segmented Modeling API Reference](#).

Starting a Segmentation Project with a User Defined Segment ID

Time series modeling must be enabled for your account to run segmented modeling projects.

Use the standard method to create a DataRobot project:

```
from datarobot import DatetimePartitioningSpecification
from datarobot import enums
from datarobot import Project
from datarobot import SegmentationTask

project_name = "Segmentation Demo with Segmentation ID"
project_dataset = "multiseries_segmentation.csv"
project = Project.create(project_dataset, project_name=project_name)

datetime_partition_column = "timestamp"
multiseries_id_column = "series_id"
user_defined_segment_id_column = "çL'l'çśżsegment_id"
target = "target"
```

Create a simple datetime specification for a time series project:

```
spec = DatetimePartitioningSpecification(
    use_time_series=True,
    datetime_partition_column=datetime_partition_column,
    multiseries_id_columns=[multiseries_id_column],
)
```

Create a segmentation task for the project:

```
segmentation_task_results = SegmentationTask.create(
    project_id=project.id,
    target=target,
    use_time_series=True,
    datetime_partition_column=datetime_partition_column,
    multiseries_id_columns=[multiseries_id_column],
    user_defined_segment_id_columns=[user_defined_segment_id_column],
)
segmentation_task = segmentation_task_results["completedJobs"][0]
```

Start a segmented project by passing the *segmentation_task_id* argument:

```
project.analyze_and_model(
    target=target,
    partitioning_method=spec,
    mode=enums.AUTOPILOT_MODE.QUICK,
    worker_count=-1,
```

(continues on next page)

(continued from previous page)

```
segmentation_task_id=segmentation_task.id,
)
```

Working with Combined Models

Retrieve Combined Models:

```
from datarobot import Project, CombinedModel
project_id = "60ff165dde5f3ceacda0f2d6"

# Get an existing segmentation project
project = Project.get(segmented_project_id)

# Retrieve list of all combined models in the project
combined_models = project.get_combined_models()

# Or just an active (current) combined model
current_combined_model = project.get_active_combined_model()
```

Get information about segments in the Combined Model:

```
segments_info = current_combined_model.get_segments_info()

# Alternatively this information can be retrieved as a Pandas DataFrame
segments_df = current_combined_model.get_segments_as_dataframe()

# Or even in CSV format
current_combined_model.get_segments_as_csv("combined_model_segments.csv")
```

Ensure Autopilot has completed for all segments:

```
segments_info = current_combined_model.get_segments_info()
assert all(segment.autopilot_done for segment in segments_info)
```

Optionally, view a list of all models associated with individual segments:

```
segments_and_child_models = project.get_segments_models(current_combined_model.id)
```

Set a new champion for a segment in the Combined Model, specifying the *project_id* of the segmented project and the *model_id* from that project:

```
segment_project_id = "60ff165dde5f3ceacdaabcde"
new_champion_id = "60ff165dde5f3ceacdaa12f7"

CombinedModel.set_segment_champion(project_id=segment_project_id, model_id=new_
↪ champion_id)
```

If active Combined Model has already been deployed - changing champions is not allowed. In this case, create a copy of Combined Model, make it active, and set champion for it (deployed model remains unchanged):

```
new_combined_model = CombinedModel.set_segment_champion(project_id=segment_project_id,
↪ model_id=new_champion_id, clone=True)
```

Run predictions on the Combined Model:

```
prediction_dataset = "multiseries_predictions.csv"

# Upload dataset
dataset = project.upload_dataset(
    source=prediction_dataset,
)

# Request predictions
predictions_job = current_combined_model.request_predictions(
    dataset_id=dataset.id,
)
predictions_job.wait_for_completion()
predictions = predictions.get_result()
```

Composable ML

Composable ML consists of two major components: the [DataRobot Blueprint Workshop](#) and custom tasks, detailed below.

Custom tasks provide users the ability to train models with arbitrary code in an environment defined by the user.

For details on using environments, see: [Manage Execution Environments](#).

Manage Custom Tasks

Before you can upload code for a custom task, you need to create the entity that holds all the metadata.

```
import datarobot as dr
from datarobot.enums import CUSTOM_TASK_TARGET_TYPE

transform = dr.CustomTask.create(
    name="a convenient display name", # required
    target_type=CUSTOM_TASK_TARGET_TYPE.TRANSFORM, # required
    language="python",
    description="a longer description of the task"
)

binary = dr.CustomTask.create(
    name="this or that",
    target_type=CUSTOM_TASK_TARGET_TYPE.BINARY,
)
```

A task, by itself is an empty metadata container. Before using your tasks, you need create a [CustomTaskVersion](#) associated with it. A task that is ready for use will have a `latest_version` field populated with this task.

```
binary.latest_version
>>> None

execution_environment = dr.ExecutionEnvironment.create(
    name="Python3 PyTorch Environment",
    description="This environment contains Python3 pytorch library.",
)
custom_task_folder = "datarobot-user-tasks/task_templates/python3_pytorch"
task_version = dr.CustomTaskVersion.create_clean(
    custom_task_id=binary.id,
```

(continues on next page)

(continued from previous page)

```

    base_environment_id=execution_environment.id,
    folder_path=custom_task_folder,
)

binary.refresh() # In order to see the change, you need to GET it from DataRobot
binary.latest_version
>>> CustomTaskVersion('v1.0')

```

If you create a new version, that will be returned as the *latest_version*. You can download the latest version as a zip file.

```

binary.latest_version
>>> CustomTaskVersion('v1.0')

custom_task_folder = "/home/my-user-name/tasks/my-updated-task/"
task_version = dr.CustomTaskVersion.create_clean(
    custom_task_id=binary.id,
    base_environment_id=execution_environment.id,
    folder_path=custom_task_folder,
)

binary.refresh()
binary.latest_version
>>> CustomTaskVersion('v2.0')

binary.download_latest_version("/home/my-user-name/downloads/my-task-files.zip")

```

You can *get*, *list*, *copy*, exactly as you would expect. *copy* makes a *complete* copy of the task: new copies of the metadata, new copies of the versions, new copies of uploaded files for the new versions.

```

all_tasks = CustomTask.list()
assert {el.id for el in all_tasks} == {binary.id, transform.id}

new_binary = CustomTask.copy(binary.id)
assert new_binary.latest_version.id != binary.latest_version.id

original_binary = CustomTask.get(binary.id)

assert len(CustomTask.list()) == 3

```

You can *update* the metadata of a task. When you do this, the object is also updated to the latest data.

```

assert binary.description == new_binary.description
binary.update(description="totally new description")

assert binary.description != new_binary.description
assert original_binary.description != binary.description # hasn't refreshed from the_
↳server yet

original_binary.refresh()
assert original_binary.description == binary.description

```

And finally, you can *delete* **only if** the task is not in use by any of the following:

- Trained models
- Deployments

- Blueprints in the AI catalog

Once you have deleted the objects that use the task, you will be able to delete the task itself.

Manage Custom Task Versions

Code for Custom Tasks can be uploaded by creating a Custom Task Version. When creating a Custom Task Version, the version must be associated with a base execution environment. If the base environment supports additional task dependencies (R or Python environments) and the Custom Task Version contains a valid `requirements.txt` file, the task version will run in an environment based on the base environment with the additional dependencies installed.

Create Custom Task Version

Upload actual custom task content by creating a clean Custom Task Version:

```
import os

custom_task_id = binary.id
custom_task_folder = "datarobot-user-tasks/task_templates/python3_pytorch"

# add files from the folder to the custom task
task_version = dr.CustomTaskVersion.create_clean(
    custom_task_id=custom_task_id,
    base_environment_id=execution_environment.id,
    folder_path=custom_task_folder,
)
```

To create a new Custom Task Version from a previous one, with just some files added or removed, do the following:

```
import os
import datarobot as dr

new_files_folder = "datarobot-user-tasks/task_templates/my_files_to_add_to_pytorch_
↳task"

file_to_delete = task_version.items[0].id

task_version_2 = dr.CustomTaskVersion.create_from_previous(
    custom_task_id=custom_task_id,
    base_environment_id=execution_environment.id,
    folder_path=new_files_folder,
)
```

Please refer to *CustomTaskFileItem* for description of custom task file properties.

List Custom Task Versions

Use the following command to list Custom Task Versions available to the user:

```
import datarobot as dr

dr.CustomTaskVersion.list(custom_task_id)

>>> [CustomTaskVersion('v2.0'), CustomTaskVersion('v1.0')]
```

Retrieve Custom Task Version

To retrieve a specific Custom Task Version, run:

```
import datarobot as dr

dr.CustomTaskVersion.get(custom_task_id, custom_task_version_id=
    ↪ '5ebe96b84024035cc6a6560b')

>>> CustomTaskVersion('v2.0')
```

Update Custom Task Version

To update Custom Task Version description execute the following:

```
import datarobot as dr

custom_task_version = dr.CustomTaskVersion.get(
    custom_task_id,
    custom_task_version_id='5ebe96b84024035cc6a6560b',
)

custom_task_version.update(description='new description')

custom_task_version.description
>>> 'new description'
```

Download Custom Task Version

Download content of the Custom Task Version as a ZIP archive:

```
import datarobot as dr

path_to_download = '/home/user/Documents/myTask.zip'

custom_task_version = dr.CustomTaskVersion.get(
    custom_task_id,
    custom_task_version_id='5ebe96b84024035cc6a6560b',
)

custom_task_version.download(path_to_download)
```

Preparing a Custom Task Version for Use

If your custom task version has dependencies, a dependency build must be completed before the task can be used. The dependency build installs your task's dependencies into the base environment associated with the task version.

see: *Preparing a Custom Model Version for Use*

Monotonic Constraints

Training with monotonic constraints allows users to force models to learn monotonic relationships with respect to some features and the target. This helps users create accurate models that comply with regulations (e.g. insurance, banking). Currently, only certain blueprints (e.g. xgboost) support this feature, and it is only supported for regression and binary classification projects. Typically working with monotonic constraints follows the following two workflows:

Workflow one - Running a project with default monotonic constraints

- set the target and specify default constraint lists for the project
- when running autopilot or manually training models without overriding constraint settings, all blueprints that support monotonic constraints will use the specified default constraint featurelists

Workflow two - Running a model with specific monotonic constraints

- create featurelists for monotonic constraints
- train a blueprint that supports monotonic constraints while specifying monotonic constraint featurelists
- the specified constraints will be used, regardless of the defaults on the blueprint

Creating featurelists

When specifying monotonic constraints, users must pass a reference to a featurelist containing only the features to be constrained, one for features that should monotonically increase with the target and another for those that should monotonically decrease with the target.

```
import datarobot as dr
project = dr.Project.get(project_id)
features_mono_up = ['feature_0', 'feature_1'] # features that have monotonically_
↳increasing relationship with target
features_mono_down = ['feature_2', 'feature_3'] # features that have monotonically_
↳decreasing relationship with target
flist_mono_up = project.create_featurelist(name='mono_up',
                                         features=features_mono_up)
flist_mono_down = project.create_featurelist(name='mono_down',
                                             features=features_mono_down)
```

Specify default monotonic constraints for a project

Users can specify default monotonic constraints for the project, to ensure that autopilot models use the desired settings, and optionally to ensure that only blueprints supporting monotonic constraints appear in the project. Regardless of the defaults specified via advanced options selection, the user can override them when manually training a particular model.

```
import datarobot as dr
from datarobot.enums import AUTOPILOT_MODE
project = dr.Project.get(project_id)
# As of v3.0, ``Project.set_options`` may be used as an alternative to passing_
↳`advanced_options`` into ``Project.analyze_and_model``.
project.set_options(
    monotonic_increasing_featurelist_id=flist_mono_up.id,
    monotonic_decreasing_featurelist_id=flist_mono_down.id,
    only_include_monotonic_blueprints=True
```

(continues on next page)

(continued from previous page)

```
)
project.analyze_and_model(target='target', mode=AUTOPILOT_MODE.FULL_AUTO)
```

If `Project.set_options` is not used, alternatively, an advanced options instance may be passed directly to `project.analyze_and_model`:

```
project.analyze_and_model(
    target='target',
    mode=AUTOPILOT_MODE.FULL_AUTO,
    advanced_options=AdvancedOptions(monotonic_increasing_featurelist_id=flist_mono_
↪up.id, monotonic_decreasing_featurelist_id=flist_mono_down.id, only_include_
↪monotonic_blueprints=True)
)
```

Retrieve models and blueprints using monotonic constraints

When retrieving models, users can inspect to see which supports monotonic constraints, and which actually enforces them. Some models will not support monotonic constraints at all, and some may support constraints but not have any constrained features specified.

```
import datarobot as dr
project = dr.Project.get(project_id)
models = project.get_models()
# retrieve models that support monotonic constraints
models_support_mono = [model for model in models if model.supports_monotonic_
↪constraints]
# retrieve models that support and enforce monotonic constraints
models_enforce_mono = [model for model in models
    if (model.monotonic_increasing_featurelist_id or
        model.monotonic_decreasing_featurelist_id)]
```

When retrieving blueprints, users can check if they support monotonic constraints and see what default constraint lists are associated with them. The monotonic featurelist ids associated with a blueprint will be used every time it is trained, unless the user specifically overrides them at model submission time.

```
import datarobot as dr
project = dr.Project.get(project_id)
blueprints = project.get_blueprints()
# retrieve blueprints that support monotonic constraints
blueprints_support_mono = [blueprint for blueprint in blueprints if blueprint.
↪supports_monotonic_constraints]
# retrieve blueprints that support and enforce monotonic constraints
blueprints_enforce_mono = [blueprint for blueprint in blueprints
    if (blueprint.monotonic_increasing_featurelist_id or
        blueprint.monotonic_decreasing_featurelist_id)]
```

Train a model with specific monotonic constraints

Even after specifying default settings for the project, users can override them to train a new model with different constraints, if desired.

```
import datarobot as dr
features_mono_up = ['feature_2', 'feature_3'] # features that have monotonically_
↳increasing relationship with target
features_mono_down = ['feature_0', 'feature_1'] # features that have monotonically_
↳decreasing relationship with target
project = dr.Project.get(project_id)
flist_mono_up = project.create_featurelist(name='mono_up',
                                          features=features_mono_up)
flist_mono_down = project.create_featurelist(name='mono_down',
                                             features=features_mono_down)

model_job_id = project.train(
    blueprint,
    sample_pct=55,
    featurelist_id=featurelist.id,
    monotonic_increasing_featurelist_id=flist_mono_up.id,
    monotonic_decreasing_featurelist_id=flist_mono_down.id
)
```

Working with binary data

Preparing data for training

Working with binary files using the DataRobot API requires prior dataset preparation in one of the supported formats. See [Prepare the dataset](#) for more detail. When the dataset is ready, you can start a project following one of the methods described in [working with Datasets](#) and [Projects](#).

Preparing data for predictions

For project creation and a lot of the prediction options, DataRobot allows you to upload ZIP archives with binary files (e.g. images files). Whenever possible it is recommended to use this option. However, in a few cases the API routes only allow you to upload your dataset in the JSON or CSV format. In these cases, you can add the binary files as base64 strings to your dataset.

Processing images

Installation

To enable support for processing images, install the datarobot library with the `images` option:

```
pip install datarobot[images]
```

This will install all needed dependencies for image processing.

Processing images

When working with image files, helper functions may first transform your images before encoding their binary data as base64 strings.

Specifically, helper functions will perform these steps:

- Retrieve binary data from the file in the specified location (local path or URL).

- Resize images to the image size used by DataRobot and save them in a different format
- Convert binary data to base64-encoded strings.

Working with images locally and located on external servers differs only in the steps related to binary file retrieval. The following steps for transformation and conversion to base64-encoded strings are the same.

This examples uses data stored in a folder structure:

```
/home/user/data/predictions
  └─ images
     └─ animal01.jpg
     └─ animal02.jpg
     └─ animal03.png
     └─ data.csv
```

As an input for processing, DataRobot needs a collection of image locations. Helper functions will process the images and return base64-encoded strings in the same order. The first example uses the contents of `data.csv` as an input. This file holds data needed for model predictions and also the image storage locations (in the `image_path` column).

Contents of `data.csv`:

```
weight_in_grams,age_in_months,image_path
5000,34,/home/user/data/predictions/images/animal01.jpg
4300,56,/home/user/data/predictions/images/animal02.jpg
4200,22,/home/user/data/predictions/images/animal03.png
```

This code snippet will read each image from the `image_path` column and store the base64-string with image data in the `image_base64` column.

```
import os
import pandas as pd
from datarobot.helpers.binary_data_utils import get_encoded_image_contents_from_paths

dataset_dir = '/home/user/data/predictions'
file_in = os.path.join(dataset_dir, 'data.csv')
file_out = os.path.join(dataset_dir, 'out.csv')

df = pd.read_csv(file_in)
df['image_base64'] = get_encoded_image_contents_from_paths(df['image_path'])
df.to_csv(file_out, index=False)
```

The same helper function will work with other iterables:

```
import os
from datarobot.helpers.binary_data_utils import get_encoded_image_contents_from_paths

images_dir = '/home/user/data/predictions/images'
images_absolute_paths = [
    os.path.join(images_dir, file) for file in ['animal01.jpg', 'animal02.jpg',
    ↪ 'animal03.png']
]

images_base64 = get_encoded_image_contents_from_paths(images_absolute_paths)
```

There is also one helper function to work with remote data. This function retrieves binary content from specified URLs, transforms the images, and returns base64-encoded strings (in the the same way as it does for images loaded from local paths).

Example:

```
import os
from datarobot.helpers.binary_data_utils import get_encoded_image_contents_from_urls

image_urls = [
    'https://<YOUR_SERVER_ADDRESS>/animal01.jpg',
    'https://<YOUR_SERVER_ADDRESS>/animal02.jpg',
    'https://<YOUR_SERVER_ADDRESS>/animal03.png'
]

images_base64 = get_encoded_image_contents_from_urls(image_urls)
```

Examples of helper functions up to this points have used default settings. If needed, the following functions allow for further customization by passing explicit parameters related to error handling, image transformations, and request header customization.

Custom image transformations

By default helper functions will apply transformations, which have proven good results. The default values align with the preprocessing used for images uploaded in ZIP archives for training. Therefore, using default values should be the first choice when preparing datasets with images for predictions. However, you can also specify custom image transformation settings to override default transformations before converting data into base64 strings. To override the default behavior, create an instance of the `ImageOptions` class and pass it as an additional parameter to the helper function.

Examples:

```
import os
from datarobot.helpers.image_utils import ImageOptions
from datarobot.helpers.binary_data_utils import get_encoded_image_contents_from_paths

images_dir = '/home/user/data/predictions/images'
images_absolute_paths = [
    os.path.join(images_dir, file) for file in ['animal01.jpg', 'animal02.jpg',
↪ 'animal03.png']
]

# Override the default behavior for image quality and subsampling, but the images
# will still be resized because that's the default behavior. Note: the `keep_quality`
# parameter for JPEG files by default preserves the quality of the original images,
# so this behavior must be disabled to manually override the quality setting with an
# explicit value.
image_options = ImageOptions(keep_quality=False, image_quality=80, image_
↪subsampling=0)
images_base64 = get_encoded_image_contents_from_paths(
    paths=images_absolute_paths, image_options=image_options
)

# overwrite default behavior for image resizing, this will keep image aspect
# ratio and will resize all images using specified size: width=300 and height=300.
# Note: if image had different aspect ratio originally it will generate image
# thumbnail, not larger than the original, that will fit in requested image size
image_options = ImageOptions(image_size=(300, 300))
images_base64 = get_encoded_image_contents_from_paths(
```

(continues on next page)

(continued from previous page)

```

    paths=images_absolute_paths, image_options=image_options
)

# Override the default behavior for image resizing, This will force the image
# to be resized to size: width=300 and height=300. When the image originally
# had a different aspect ratio - than resizing it using `force_size` parameter
# will alter its aspect ratio modifying the image (e.g. stretching)
image_options = ImageOptions(image_size=(300, 300), force_size=True)
images_base64 = get_encoded_image_contents_from_paths(
    paths=images_absolute_paths, image_options=image_options
)

# overwrite default behavior and retain original image sizes
image_options = ImageOptions(should_resize=False)
images_base64 = get_encoded_image_contents_from_paths(
    paths=images_absolute_paths, image_options=image_options
)

```

Custom request headers

If needed, you can specify custom request headers for downloading binary data.

Example:

```

import os
from datarobot.helpers.binary_data_utils import get_encoded_image_contents_from_urls

token = 'N169vmABaEuchUsj88N0eOoH2kfUbhCCByhoFDf4whJyJINTf7NOhhPrNQKqVVJJ'
custom_headers = {
    'User-Agent': 'My User Agent',
    'Authorization': 'Bearer {}'.format(token)
}

image_urls = [
    'https://<YOUR_SERVER_ADDRESS>/animal01.jpg',
    'https://<YOUR_SERVER_ADDRESS>/animal02.jpg',
    'https://<YOUR_SERVER_ADDRESS>/animal03.png',
]

images_base64 = get_encoded_image_contents_from_urls(image_urls, custom_headers)

```

Handling errors

When processing multiple images, any error during processing will, by default, stop operations (i.e., the helper function will raise `datarobot.errors.ContentRetrievalTerminatedError` and terminate further processing). In the case of an error during content retrieval (e.g. connectivity issue, file not found, etc), you can override this behavior by passing `continue_on_error=True` to the helper function. When specified, processing will continue. In rows where the error was raised, the value `None` value will be returned instead of a base64-encoded string. This applies only to errors during content retrieval, other errors will always terminate execution.

Example:

```

import os
from datarobot.helpers.binary_data_utils import get_encoded_image_contents_from_paths

images_dir = '/home/user/data/predictions/images'
images_absolute_paths = [
    os.path.join(images_dir, file) for file in ['animal01.jpg', 'missing.jpg',
↪ 'animal03.png']
]

# This execution will print None for missing files and base64 strings for existing_
↪ files
images_base64 = get_encoded_image_contents_from_paths(images_absolute_paths, continue_
↪ on_error=True)
for value in images_base64:
    print(value)

# This execution will raise error during processing of missing file terminating_
↪ operation
images_base64 = get_encoded_image_contents_from_paths(images_absolute_paths)

```

Processing other binary files

Other binary files can be processed by dedicated functions. These functions work similarly to the functions used for images, although they do not provide functionality for any transformations. Processing follows two steps instead of three:

- Retrieve binary data from the file in the specified location (local path or URL).
- Convert binary data to base64-encoded strings.

To process documents into base64-encoded strings use these functions:

- To retrieve files from local paths: **get_encoded_file_contents_from_paths** - t
- To retrieve files from locations specified as URLs: **get_encoded_file_contents_from_urls** -

Examples:

```

import os
from datarobot.helpers.binary_data_utils import get_encoded_file_contents_from_urls

document_urls = [
    'https://<YOUR_SERVER_ADDRESS>/document01.pdf',
    'https://<YOUR_SERVER_ADDRESS>/missing.pdf',
    'https://<YOUR_SERVER_ADDRESS>/document03.pdf',
]

# this call will return base64 strings for existing documents and None for missing_
↪ files
documents_base64 = get_encoded_file_contents_from_urls(document_urls, continue_on_
↪ error=True)
for value in documents_base64:
    print(value)

# This execution will raise error during processing of missing file terminating_
↪ operation
documents_base64 = get_encoded_file_contents_from_urls(document_urls)

```

Model Insights

The Modeling section provides information to help you easily navigate the process of building, understanding, and analyzing models.

Prediction Explanations

To compute prediction explanations you need to have *feature impact* computed for a model, and predictions for an uploaded dataset computed with a selected model.

Computing prediction explanations is a resource-intensive task, but you can configure it with maximum explanations per row and prediction value thresholds to speed up the process.

Quick Reference

```
import datarobot as dr
# Get project
my_projects = dr.Project.list()
project = my_projects[0]
# Get model
models = project.get_models()
model = models[0]
# Compute feature impact
feature_impacts = model.get_or_request_feature_impact()
# Upload dataset
dataset = project.upload_dataset('./data_to_predict.csv')
# Compute predictions
predict_job = model.request_predictions(dataset.id)
predict_job.wait_for_completion()
# Initialize prediction explanations
pei_job = dr.PredictionExplanationsInitialization.create(project.id, model.id)
pei_job.wait_for_completion()
# Compute prediction explanations with default parameters
pe_job = dr.PredictionExplanations.create(project.id, model.id, dataset.id)
pe = pe_job.get_result_when_complete()
# Iterate through predictions with prediction explanations
for row in pe.get_rows():
    print(row.prediction)
    print(row.prediction_explanations)
# download to a CSV file
pe.download_to_csv('prediction_explanations.csv')
```

List Prediction Explanations

You can use the `PredictionExplanations.list()` method to return a list of prediction explanations computed for a project's models:

```
import datarobot as dr
prediction_explanations = dr.PredictionExplanations.list('58591727100d2b57196701b3')
print(prediction_explanations)
>>> [PredictionExplanations(id=585967e7100d2b6afc93b13b,
                             project_id=58591727100d2b57196701b3,
                             model_id=585932c5100d2b7c298b8acf),
```

(continues on next page)

(continued from previous page)

```

PredictionExplanations (id=58596bc2100d2b639329eae4,
                        project_id=58591727100d2b57196701b3,
                        model_id=585932c5100d2b7c298b8ac5),
PredictionExplanations (id=58763db4100d2b66759cc187,
                        project_id=58591727100d2b57196701b3,
                        model_id=585932c5100d2b7c298b8ac5),
...]
pe = prediction_explanations[0]

pe.project_id
>>> u'58591727100d2b57196701b3'
pe.model_id
>>> u'585932c5100d2b7c298b8ac5'

```

You can pass following parameters to filter the result:

- `model_id` – str, used to filter returned prediction explanations by `model_id`.
- `limit` – int, limit for number of items returned, default: no limit.
- `offset` – int, number of items to skip, default: 0.

List Prediction Explanations Example:

```

project_id = '58591727100d2b57196701b3'
model_id = '585932c5100d2b7c298b8ac5'
dr.PredictionExplanations.list(project_id, model_id=model_id, limit=20, offset=100)

```

Initialize Prediction Explanations

In order to compute prediction explanations you have to initialize it for a particular model.

```
dr.PredictionExplanationsInitialization.create(project_id, model_id)
```

Compute Prediction Explanations

If all prerequisites are in place, you can compute prediction explanations in the following way:

```

import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
dataset_id = '5506fcd98bd88a8142b725c8'
pe_job = dr.PredictionExplanations.create(project_id, model_id, dataset_id,
                                          max_explanations=2, threshold_low=0.2, threshold_
↳ high=0.8)
pe = pe_job.get_result_when_complete()

```

Where:

- `max_explanations` are the maximum number of prediction explanations to compute for each row.
- `threshold_low` and `threshold_high` are thresholds for the value of the prediction of the row. Prediction explanations will be computed for a row if the row's prediction value is higher than `threshold_high` or lower than `threshold_low`. If no thresholds are specified, prediction explanations will be computed for all rows.

Retrieving Prediction Explanations

You have three options for retrieving prediction explanations.

Note: `PredictionExplanations.get_all_as_dataframe()` and `PredictionExplanations.download_to_csv()` reformat prediction explanations to match the schema of CSV file downloaded from UI (RowId, Prediction, Explanation 1 Strength, Explanation 1 Feature, Explanation 1 Value, Explanation N Strength, Explanation N Feature, Explanation N Value)

Get prediction explanations rows one by one as *PredictionExplanationsRow* objects:

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
prediction_explanations_id = '5506fcd98bd88f1641a720a3'
pe = dr.PredictionExplanations.get(project_id, prediction_explanations_id)
for row in pe.get_rows():
    print(row.prediction_explanations)
```

Get all rows as `pandas.DataFrame`:

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
prediction_explanations_id = '5506fcd98bd88f1641a720a3'
pe = dr.PredictionExplanations.get(project_id, prediction_explanations_id)
prediction_explanations_df = pe.get_all_as_dataframe()
```

Download all rows to a file as CSV document:

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
prediction_explanations_id = '5506fcd98bd88f1641a720a3'
pe = dr.PredictionExplanations.get(project_id, prediction_explanations_id)
pe.download_to_csv('prediction_explanations.csv')
```

Adjusted Predictions In Prediction Explanations

In some projects such as insurance projects, the prediction adjusted by exposure is more useful compared with raw prediction. For example, the raw prediction (e.g. claim counts) is divided by exposure (e.g. time) in the project with exposure column. The adjusted prediction provides insights with regard to the predicted claim counts per unit of time. To include that information, set `exclude_adjusted_predictions` to `False` in correspondent method calls.

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
prediction_explanations_id = '5506fcd98bd88f1641a720a3'
pe = dr.PredictionExplanations.get(project_id, prediction_explanations_id)
pe.download_to_csv('prediction_explanations.csv', exclude_adjusted_predictions=False)
prediction_explanations_df = pe.get_all_as_dataframe(exclude_adjusted_
↪predictions=False)
```

Multiclass/Clustering Prediction Explanation Modes

When calculating prediction explanations for the multiclass or clustering model you need to specify which classes should be explained in each row. By default we only explain the predicted class but it can be set with the mode

parameter of `PredictionExplanations.create`

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
dataset_id = '5506fcd98bd88a8142b725c8'
# Explain predicted and second-best class results in each row
pe_job = dr.PredictionExplanations.create(project_id, model_id, dataset_id,
                                         mode=dr.models.TopPredictionsMode(2))
pe = pe_job.get_result_when_complete()
# Explain results for classes "setosa" and "versicolor" in each row
pe_job = dr.PredictionExplanations.create(project_id, model_id, dataset_id,
                                         mode=dr.models.ClassListMode(["setosa",
↪ "versicolor"]))
pe = pe_job.get_result_when_complete()
```

SHAP based prediction explanations

You can request SHAP based prediction explanations using previously uploaded scoring dataset for models that support SHAP. Unlike for XEMP prediction explanations you do not need to have *feature impact* computed for a model, and predictions for an uploaded dataset.

See `datarobot.models.ShapMatrix.create()` reference for a description of the types of parameters that can be passed in.

```
import datarobot as dr
project_id = '5ea6d3354cfad121cf33a5e1'
model_id = '5ea6d38b4cfad121cf33a60d'
project = dr.Project.get(project_id)
model = dr.Model.get(project=project_id, model_id=model_id)
# check if model supports SHAP
model_capabilities = model.get_supported_capabilities()
print(model_capabilities.get('supportsShap'))
>>> True
# upload dataset to generate prediction explanations
dataset_from_path = project.upload_dataset('./data_to_predict.csv')

shap_matrix_job = ShapMatrix.create(project_id=project_id, model_id=model_id, dataset_
↪ id=dataset_from_path.id)
shap_matrix_job
>>> Job(shapMatrix, status=inprogress)
# wait for job to finish
shap_matrix = shap_matrix_job.get_result_when_complete()
shap_matrix
>>> ShapMatrix(id='5ea84b624cfad1361c53f65d', project_id='5ea6d3354cfad121cf33a5e1',
↪ model_id='5ea6d38b4cfad121cf33a60d', dataset_id='5ea84b464cfad1361c53f655')

# retrieve SHAP matrix as pandas.DataFrame
df = shap_matrix.get_as_dataframe()

# list as available SHAP matrices for a project
shap_matrices = dr.ShapMatrix.list(project_id)
shap_matrices
>>> [ShapMatrix(id='5ea84b624cfad1361c53f65d', project_id='5ea6d3354cfad121cf33a5e1',
↪ model_id='5ea6d38b4cfad121cf33a60d', dataset_id='5ea84b464cfad1361c53f655')]
```

(continues on next page)

(continued from previous page)

```
shap_matrix = shap_matrices[0]
# retrieve SHAP matrix as pandas.DataFrame
df = shap_matrix.get_as_dataframe()
```

Rating Table

A rating table is an exportable csv representation of a Generalized Additive Model. They contain information about the features and coefficients used to make predictions. Users can influence predictions by downloading and editing values in a rating table, then reuploading the table and using it to create a new model.

See the page about interpreting Generalized Additive Models' output in the Datarobot user guide for more details on how to interpret and edit rating tables.

Download A Rating Table

You can retrieve a rating table from the list of rating tables in a project:

```
import datarobot as dr
project_id = '5506fcd38bd88f5953219da0'
project = dr.Project.get(project_id)
rating_tables = project.get_rating_tables()
rating_table = rating_tables[0]
```

Or you can retrieve a rating table from a specific model. The model must already exist:

```
import datarobot as dr
from datarobot.models import RatingTableModel, RatingTable
project_id = '5506fcd38bd88f5953219da0'
project = dr.Project.get(project_id)

# Get model from list of models with a rating table
rating_table_models = project.get_rating_table_models()
rating_table_model = rating_table_models[0]

# Or retrieve model by id. The model must have a rating table.
model_id = '5506fcd98bd88f1641a720a3'
rating_table_model = dr.RatingTableModel.get(project=project_id, model_id=model_id)

# Then retrieve the rating table from the model
rating_table_id = rating_table_model.rating_table_id
rating_table = dr.RatingTable.get(project_id, rating_table_id)
```

Then you can download the contents of the rating table:

```
rating_table.download('./my_rating_table.csv')
```

Uploading A Rating Table

After you've retrieved the rating table CSV and made the necessary edits, you can re-upload the CSV so you can create a new model from it:

```
job = dr.RatingTable.create(project_id, model_id, './my_rating_table.csv')
new_rating_table = job.get_result_when_complete()
job = new_rating_table.create_model()
model = job.get_result_when_complete()
```

Automated Documentation

DataRobot can generate Automated Documentation about various entities within the platform, such as specific models or projects. These reports can be downloaded and shared to help with regulatory compliance as well as to provide a general understanding of the AI lifecycle.

Check Available Document Types

Automated Documentation is available behind different feature flags set up according to your POC settings or subscription plan. `MODEL_COMPLIANCE` documentation is a premium add-on DataRobot product, while `AUTOPILOT_SUMMARY` report is available behind an optional feature flag for Self-Service and other platforms.

```
import datarobot as dr

# Connect to your DataRobot platform with your token
dr.Client(token=my_token, endpoint=endpoint)
options = dr.AutomatedDocument.list_available_document_types()
```

In response, you get a data dictionary with a list of document types that are available for generation with your account.

Generate Automated Documents

Now that you know which documents you can generate, create one with `AutomatedDocument.generate` method. Note that for `AUTOPILOT_SUMMARY` report, you need to assign a project ID to the `entity_id` parameter, while `MODEL_COMPLIANCE` expects an ID of a model with the `entity_id` parameter.

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)

doc_type = "AUTOPILOT_SUMMARY"
entity_id = "5e8b6a34d2426053ab9a39ed" # This is an ID of a project
file_format="docx"

doc = dr.AutomatedDocument(document_type=doc_type, entity_id=entity_id, output_
    ↪format=file_format)
doc.generate()
```

You can specify other attributes. For example, `filepath` presets the file location and name to use when downloading the document. Please see the [API Reference](#) for more details.

Download Automated Documents

If you followed the steps above to generate an automated document, you can use the `AutomatedDocument.download` method right away to get the document.

```
doc.filepath = "Users/jeremy/DR_project_docs/autopilot_report_staff_2021.docx"
doc.download()
```

You can set a desired `filepath` (that includes the future file's name) before you download a document. Otherwise, it will be automatically downloaded to the directory from which you launched your script.

Please note that to download the document, you need its ID. When you generate a document with the Python client, the ID is set automatically without your interference. However, if the document has already been generated from the application interface (or REST API) and you want to download it using the Python client, you need to provide the ID of the document you want to download:

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)

doc_id = "604f81f0f3d6397d250c35bc"
path = "Users/jeremy/DR_project_docs/xgb_model_doc_staff_project_2021.docx"
doc = dr.AutomatedDocument(id=doc_id, filepath=path)
doc.download()
```

List Previously Generated Automated Documents

You can retrieve information about previously generated documents available for your account. The information includes document ID and type, ID of the entity it was generated for, time of creation, and other information. Documents are sorted by creation time – `created_at` key – from most recent to oldest.

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)
docs = dr.AutomatedDocument.list_generated_documents()
```

This returns list of `AutomatedDocument` objects. You can request a list of specific documents. For example, get a list of all `MODEL_COMPLIANCE` documents:

```
model_docs = dr.AutomatedDocument.list_generated_documents(document_types=["MODEL_
↳COMPLIANCE"])
```

Or get a list of documents created for specific entities:

```
otv_project_reports = dr.AutomatedDocument.list_generated_documents(
    entity_ids=["604f81f0f3d6397d250c35bc", "5ed60de32f18d97d250c3db5"]
)
```

For more information about all query options, see `AutomatedDocument.list_generated_documents` in the *API Reference*.

Delete Automated Documents

To delete a document from the DataRobot application, use the `AutomatedDocument.delete` method.

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)
```

(continues on next page)

(continued from previous page)

```
doc = dr.AutomatedDocument(id="604f81f0f3d6397d250c35bc")
doc.delete()
```

All locally saved automated documents will remain intact.

External Testset

Testing with external datasets allows better evaluation model performance, you can compute metric scores and insights on external test dataset to ensure consistent performance prior to deployment.

Note: Not available for Time series models.

Requesting External Scores and Insights

To compute scores and insights on a dataset

Upload a prediction dataset that contains the target column `PredictionDataset.contains_target_values == True`. Dataset should be in the same structure as the original project.

```
import datarobot as dr
# Upload dataset
project = dr.Project(project_id)
dataset = project.upload_dataset('./test_set.csv')
dataset.contains_target_values
>>>True
# request external test to compute metric scores and insights on dataset
# select model using project.get_models()
external_test_job = model.request_external_test(dataset.id)
# once job is complete, scores and insights are ready for retrieving
external_test_job.wait_for_completion()
```

Retrieving External Metric Scores and Insights

After completion of external test job, metric scores and insights for external testsets will be ready.

Note: Please check `PredictionDataset.data_quality_warnings` for dataset warnings. Insights are not available if dataset is too small (less than 10 rows). ROC curve cannot be calculated if dataset has only one class in target column

Retrieving External Metric Scores

```
import datarobot as dr
# retrieving list of external metric scores on multiple datasets
metric_scores_list = dr.ExternalScores.list(project_id, model_id)
# retrieving external metric scores on one dataset
metric_scores = dr.ExternalScores.get(project_id, model_id, dataset_id)
```

Retrieving External Lift Chart

```
import datarobot as dr
# retrieving list of lift charts on multiple datasets
lift_list = dr.ExternalLiftChart.list(project_id, model_id)
# retrieving one lift chart for dataset
lift = dr.ExternalLiftChart.get(project_id, model_id, dataset_id)
```

Retrieving External Multiclass Lift Chart

Lift chart for Multiclass models only

```
import datarobot as dr
# retrieving list of lift charts on multiple datasets
lift_list = ExternalMulticlassLiftChart.list(project_id, model_id)
# retrieving one lift chart for dataset and a target class
lift = ExternalMulticlassLiftChart.get(project_id, model_id, dataset_id, target_class)
```

Retrieving External ROC Curve

Available for Binary classification models only

```
import datarobot as dr
# retrieving list of roc curves on multiple datasets
roc_list = ExternalRocCurve.list(project_id, model_id)
# retrieving one ROC curve for dataset
roc = ExternalRocCurve.get(project_id, model_id, dataset_id)
```

Retrieving Multiclass Confusion Matrix

Available for Multiclass classification models only

```
import datarobot as dr
# retrieving list of confusion charts on multiple datasets
confusion_list = ExternalConfusionChart.list(project_id, model_id)
# retrieving one confusion chart for dataset
confusion = ExternalConfusionChart.get(project_id, model_id, dataset_id)
```

Retrieving Residuals Chart

Available for Regression models only

```
import datarobot as dr
# retrieving list of residuals charts on multiple datasets
residuals_list = ExternalResidualsChart.list(project_id, model_id)
# retrieving one residuals chart for dataset
residuals = ExternalResidualsChart.get(project_id, model_id, dataset_id)
```

Jobs

The `Job` class is a generic representation of jobs running through a project's queue. Many tasks involved in modeling, such as creating a new model or computing feature impact for a model, will use a job to track the worker usage and progress of the associated task.

Checking the Contents of the Queue

To see what jobs running or waiting in the queue for a project, use the `Project.get_all_jobs` method.

```
from datarobot.enums import QUEUE_STATUS

jobs_list = project.get_all_jobs() # gives all jobs queued or inprogress
jobs_by_type = {}
for job in jobs_list:
    if job.job_type not in jobs_by_type:
        jobs_by_type[job.job_type] = [0, 0]
    if job.status == QUEUE_STATUS.QUEUE:
        jobs_by_type[job.job_type][0] += 1
    else:
        jobs_by_type[job.job_type][1] += 1
for type in jobs_by_type:
    (num_queued, num_inprogress) = jobs_by_type[type]
    print('{} jobs: {} queued, {} inprogress'.format(type, num_queued, num_
↪inprogress))
```

Cancelling a Job

If a job is taking too long to run or no longer necessary, it can be cancelled easily from the `Job` object.

```
from datarobot.enums import QUEUE_STATUS

project.pause_autopilot()
bad_jobs = project.get_all_jobs(status=QUEUE_STATUS.QUEUE)
for job in bad_jobs:
    job.cancel()
project.unpause_autopilot()
```

Retrieving Results From a Job

Once you've found a particular job of interest, you can retrieve the results once it is complete. Note that the type of the returned object will vary depending on the `job_type`. All return types are documented in `Job.get_result`.

```
from datarobot.enums import JOB_TYPE

time_to_wait = 60 * 60 # how long to wait for the job to finish (in seconds) - i.e.
↪an hour
assert my_job.job_type == JOB_TYPE.MODEL
my_model = my_job.get_result_when_complete(max_wait=time_to_wait)
```

Model Jobs

Model creation is an asynchronous process. This means that when explicitly invoking new model creation (with `project.train` or `model.train` for example) all you get is the id of the process, responsible for model creation. With this id you can get info about the model that is being created or the model itself, when the creation process is finished. For this you should use the `ModelJob` class.

Get an existing ModelJob

To retrieve existing `ModelJob` use `ModelJob.get` method. For this you need the id of `Project` that is used for model creation and the id of `ModelJob`. Having `ModelJob` might be useful if you want to know parameters of model creation, automatically chosen by the API backend, before actual model was created.

If model is already created, `ModelJob.get` will raise `PendingJobFinished` exception

```
import time

import datarobot as dr

blueprint_id = '5506fcd38bd88f5953219da0'
model_job_id = project.train(blueprint_id)
model_job = dr.ModelJob.get(project_id=project.id,
                             model_job_id=model_job_id)

model_job.sample_pct
>>> 64.0

# wait for model to be created (in a very inefficient way)
time.sleep(10 * 60)
model_job = dr.ModelJob.get(project_id=project.id,
                             model_job_id=model_job_id)

>>> datarobot.errors.PendingJobFinished

# get the job attached to the model
model_job.model
>>> Model('5d518cd3962d741512605e2b')
```

Get a created model

After model is created, you can use `ModelJob.get_model` to get newly created model.

```
import datarobot as dr

model = dr.ModelJob.get_model(project_id=project.id,
                               model_job_id=model_job_id)
```

wait_for_async_model_creation function

If you just want to get the created model after getting the `ModelJob` id, you can use the `wait_for_async_model_creation` function. It will poll for the status of the model creation process until it's finished, and then will return the newly created model. Note the differences below between datetime partitioned projects and non-datetime-partitioned projects.

```
from datarobot.models.modeljob import wait_for_async_model_creation

# used during training based on blueprint
model_job_id = project.train(blueprint, sample_pct=33)
new_model = wait_for_async_model_creation(
    project_id=project.id,
    model_job_id=model_job_id,
)

# used during training based on existing model
model_job_id = existing_model.train(sample_pct=33)
new_model = wait_for_async_model_creation(
    project_id=existing_model.project_id,
    model_job_id=model_job_id,
)

# For datetime-partitioned projects, use project.train_datetime. Note that train_
↪datetime returns a ModelJob instead
# of just an id.
model_job = project.train_datetime(blueprint)
new_model = wait_for_async_model_creation(
    project_id=project.id,
    model_job_id=model_job.id
)
```

DataRobot Prime

DataRobot Prime allows the download of executable code approximating models. For more information about this feature, see the documentation within the DataRobot webapp. Contact your Account Executive or CFDS for information on enabling DataRobot Prime, if needed.

Approximate a Model

Given a Model you wish to approximate, `Model.request_approximation` will start a job creating several Ruleset objects approximating the parent model. Each of those rulesets will identify how many rules were used to approximate the model, as well as the validation score the approximation achieved.

```
rulesets_job = model.request_approximation()
rulesets = rulesets_job.get_result_when_complete()
for ruleset in rulesets:
    info = (ruleset.id, ruleset.rule_count, ruleset.score)
    print('id: {}, rule_count: {}, score: {}'.format(*info))
```

Prime Models vs. Models

Given a ruleset, you can create a model based on that ruleset. We consider such models to be Prime models. The `PrimeModel` class inherits from the `Model` class, so anything a `Model` can do, as `PrimeModel` can do as well.

The `PrimeModel` objects available within a `Project` can be listed by `project.get_prime_models`, or a particular one can be retrieve via `PrimeModel.get`. If a ruleset has not yet had a model built for it, `ruleset.request_model` can be used to start a job to make a `PrimeModel` using a particular ruleset.

```
rulesets = parent_model.get_rulesets()
selected_ruleset = sorted(rulesets, key=lambda x: x.score)[-1]
if selected_ruleset.model_id:
    prime_model = PrimeModel.get(selected_ruleset.project_id, selected_ruleset.model_
    ↪id)
else:
    prime_job = selected_ruleset.request_model()
    prime_model = prime_job.get_result_when_complete()
```

The PrimeModel class has two additional attributes and one additional method. The attributes are `ruleset`, which is the RuleSet used in the PrimeModel, and `parent_model_id` which is the id of the model it approximates.

Finally, the new method defined is `request_download_validation` which is used to prepare code download for the model and is discussed later on in this document.

Retrieving Code from a PrimeModel

Given a PrimeModel, you can download the code used to approximate the parent model, and view and execute it locally.

The first step is to validate the PrimeModel, which runs some basic validation of the generated code, as well as preparing it for download. We use the PrimeFile object to represent code that is ready to download. PrimeFiles can be prepared by the `request_download_validation` method on PrimeModel objects, and listed from a project with the `get_prime_files` method.

Once you have a PrimeFile you can check the `is_valid` attribute to verify the code passed basic validation, and then download it to a local file with `download`.

```
validation_job = prime_model.request_download_validation(enums.PRIME_LANGUAGE.PYTHON)
prime_file = validation_job.get_result_when_complete()
if not prime_file.is_valid:
    raise ValueError('File was not valid')
prime_file.download('/home/myuser/drCode/primeModelCode.py')
```

Model Recommendation

During the Autopilot modeling process, DataRobot will recommend up to three well-performing models.

Warning: Model recommendations are only generated when you run full Autopilot.

One of them (the most accurate individual, non-blender model) will be prepared for deployment. In the preparation process, DataRobot:

1. Calculates **feature impact** for the selected model and uses it to generate **a reduced feature list**.
2. Retrains the selected model on **the reduced feature list**. If the new model performs better than the original model, DataRobot uses the new model for the next stage. Otherwise, the original model is used.
3. Retrains the selected model on **a higher sample size**. If the new model performs better than the original model, DataRobot selects it as **Recommended for Deployment**. Otherwise, the original model is selected.

Note: The higher sample size DataRobot uses in Step 3 is either:

1. **Up to holdout** if the training sample size *does not* exceed the maximum Autopilot size threshold: sample size is the training set plus the validation set (for TVH) or 5-folds (for CV). In this case, DataRobot compares retrained and original models on the holdout score.
 2. **Up to validation** if the training sample size *does* exceed the maximum Autopilot size threshold: sample size is the training set (for TVH) or 4-folds (for CV). In this case, DataRobot compares retrained and original models on the validation score.
-

The three types of recommendations are the following:

- **Recommended for Deployment.** This is the most accurate individual, non-blender model on the Leaderboard. This model is ready for deployment.
- **Most Accurate.** Based on the validation or cross-validation results, this model is the most accurate model overall on the Leaderboard (in most cases, a blender).
- **Fast & Accurate.** This is the most accurate individual model on the Leaderboard that passes a set prediction speed guidelines. If no models meet the guideline, the badge is not applied.

Retrieve all recommendations

The following code will return all models recommended for the project.

```
import datarobot as dr

recommendations = dr.ModelRecommendation.get_all(project_id)
```

Retrieve a default recommendation

If you are unsure about the tradeoffs between the various types of recommendations, DataRobot can make this choice for you. The following route will return the Recommended for Deployment model to use for predictions for the project.

```
import datarobot as dr

recommendation = dr.ModelRecommendation.get(project_id)
```

Retrieve a specific recommendation

If you know which recommendation you want to use, you can select a specific recommendation using the following code.

```
import datarobot as dr

recommendation_type = dr.enums.RECOMMENDED_MODEL_TYPE.FAST_ACCURATE
recommendations = dr.ModelRecommendation.get(project_id, recommendation_type)
```

Get recommended model

You can use method `get_model()` of a recommendation object to retrieve a recommended model.

```
import datarobot as dr

recommendation = dr.ModelRecommendation.get(project_id)
recommended_model = recommendation.get_model()
```

2.2.3 Predictions

The following sections describe the components to making predictions in DataRobot:

- **Generate predictions:** Initiate a prediction job with the `Model.request_predictions()` method. This method can use either a training dataset or predictions dataset for scoring.
- **Batch predictions:** Score large sets of data with batch predictions. You can define jobs and their schedule.
- **Prediction API:** Use [DataRobot's Prediction API](#). to make predictions on both a dedicated and/or a standalone prediction server.
- **Scoring Code:** Qualifying models allow you to [export Scoring Code](#) and use DataRobot-generated models outside of the platform

Predictions

Predictions generation is an asynchronous process. This means that when starting predictions with `Model.request_predictions()` you will receive back a `PredictJob` for tracking the process responsible for fulfilling your request.

With this object you can get info about the predictions generation process before it has finished and be rerouted to the predictions themselves when the process is finished. For this you should use the `PredictJob` class.

Starting predictions generation

Before actually requesting predictions, you should upload the dataset you wish to predict via `Project.upload_dataset`. Previously uploaded datasets can be seen under `Project.get_datasets`. When uploading the dataset you can provide the path to a local file, a file object, raw file content, a `pandas.DataFrame` object, or the url to a publicly available dataset.

To start predicting on new data using a finished model use `Model.request_predictions()`. It will create a new predictions generation process and return a `PredictJob` object tracking this process. With it, you can monitor an existing `PredictJob` and retrieve generated predictions when the corresponding `PredictJob` is finished.

```
import datarobot as dr

project_id = '5506fcd38bd88f5953219da0'
model_id = '5506fcd98bd88f1641a720a3'
project = dr.Project.get(project_id)
model = dr.Model.get(
    project=project_id,
    model_id=model_id,
)

# As of v3.0, in addition to passing a ``dataset_id``, you can pass in a ``dataset``,
# → ``file``, ``file_path`` or
# ``dataframe`` to `Model.request_predictions`.
```

(continues on next page)

(continued from previous page)

```

predict_job = model.request_predictions(file_path='./data_to_predict.csv')

# Alternative version uploading the dataset from a local path and passing it by its id
dataset_from_path = project.upload_dataset('./data_to_predict.csv')
predict_job = model.request_predictions(dataset_id=dataset_from_path.id)

# Alternative version: upload the dataset as a file object and pass it by using its_
↳dataset id
with open('./data_to_predict.csv') as data_to_predict:
    dataset_from_file = project.upload_dataset(data_to_predict)
predict_job = model.request_predictions(dataset_id=dataset_from_file.id) # OR_
↳predict_job = model.request_predictions(dataset_id=dataset_from_file.id)

```

Listing Predictions

You can use the `Predictions.list()` method to return a list of predictions generated on a project.

```

import datarobot as dr
predictions = dr.Predictions.list('58591727100d2b57196701b3')

print(predictions)
>>>[Predictions(prediction_id='5b6b163eca36c0108fc5d411',
                project_id='5b61bd68ca36c04aed8aab7f',
                model_id='5b61bd7aca36c05744846630',
                dataset_id='5b6b1632ca36c03b5875e6a0'),
     Predictions(prediction_id='5b6b2315ca36c0108fc5d41b',
                project_id='5b61bd68ca36c04aed8aab7f',
                model_id='5b61bd7aca36c0574484662e',
                dataset_id='5b6b1632ca36c03b5875e6a0'),
     Predictions(prediction_id='5b6b23b7ca36c0108fc5d422',
                project_id='5b61bd68ca36c04aed8aab7f',
                model_id='5b61bd7aca36c0574484662e',
                dataset_id='55b6b1632ca36c03b5875e6a0')
     ]

```

You can pass following parameters to filter the result:

- `model_id` – str, used to filter returned predictions by `model_id`.
- `dataset_id` – str, used to filter returned predictions by `dataset_id`.

Get an existing PredictJob

To retrieve an existing `PredictJob` use the `PredictJob.get` method. This will give you a `PredictJob` matching the latest status of the job if it has not completed.

If predictions have finished building, `PredictJob.get` will raise a `PendingJobFinished` exception.

```

import time

import datarobot as dr

predict_job = dr.PredictJob.get(
    project_id=project_id,

```

(continues on next page)

(continued from previous page)

```

    predict_job_id=predict_job_id,
)
predict_job.status
>>> 'queue'

# wait for generation of predictions (in a very inefficient way)
time.sleep(10 * 60)
predict_job = dr.PredictJob.get(
    project_id=project_id,
    predict_job_id=predict_job_id,
)
>>> dr.errors.PendingJobFinished

# now the predictions are finished
predictions = dr.PredictJob.get_predictions(
    project_id=project.id,
    predict_job_id=predict_job_id,
)

```

Get generated predictions

After predictions are generated, you can use `PredictJob.get_predictions` to get newly generated predictions.

If predictions have not yet been finished, it will raise a `JobNotFinished` exception.

```

import datarobot as dr

predictions = dr.PredictJob.get_predictions(
    project_id=project.id,
    predict_job_id=predict_job_id,
)

```

Wait for and Retrieve results

If you just want to get generated predictions from a `PredictJob`, you can use the `PredictJob.get_result_when_complete` function. It will poll the status of the predictions generation process until it has finished, and then will return predictions.

```

dataset = project.get_datasets()[0]
predict_job = model.request_predictions(dataset.id)
predictions = predict_job.get_result_when_complete()

```

Get previously generated predictions

If you don't have a `Model.predict_job` on hand, there are two more ways to retrieve predictions from the Predictions interface:

1. Get all prediction rows as a `pandas.DataFrame` object:

```
import datarobot as dr

preds = dr.Predictions.get("5b61bd68ca36c04aed8aab7f", prediction_id=
↳"5b6b163eca36c0108fc5d411")
df = preds.get_all_as_dataframe()
df_with_serializer = preds.get_all_as_dataframe(serializer='csv')
```

2. Download all prediction rows to a file as a CSV document:

```
import datarobot as dr

preds = dr.Predictions.get("5b61bd68ca36c04aed8aab7f", prediction_id=
↳"5b6b163eca36c0108fc5d411")
preds.download_to_csv('predictions.csv')

preds.download_to_csv('predictions_with_serializer.csv', serializer='csv')
```

Training predictions

The training predictions interface allows computing and retrieving out-of-sample predictions for a model using the original project dataset. The predictions can be computed for all the rows, or restricted to validation or holdout data. As the predictions generated will be out-of-sample, they can be expected to have different results than if the project dataset were reuploaded as a prediction dataset.

Quick reference

Training predictions generation is an asynchronous process. This means that when starting predictions with `datarobot.models.Model.request_training_predictions()` you will receive back a `datarobot.models.TrainingPredictionsJob` for tracking the process responsible for fulfilling your request. Actual predictions may be obtained with the help of a `datarobot.models.training_predictions.TrainingPredictions` object returned as the result of the training predictions job. There are three ways to retrieve them:

1. Iterate prediction rows one by one as named tuples:

```
import datarobot as dr

# Calculate new training predictions on all dataset
training_predictions_job = model.request_training_predictions(dr.enums.DATA_SUBSET.
↳ALL)
training_predictions = training_predictions_job.get_result_when_complete()

# Fetch rows from API and print them
for prediction in training_predictions.iterate_rows(batch_size=250):
    print(prediction.row_id, prediction.prediction)
```

2. Get all prediction rows as a `pandas.DataFrame` object:

```
import datarobot from dr

# Calculate new training predictions on holdout partition of dataset
training_predictions_job = model.request_training_predictions(dr.enums.DATA_SUBSET.
↳HOLDOUT)
training_predictions = training_predictions_job.get_result_when_complete()
```

(continues on next page)

(continued from previous page)

```
# Fetch training predictions as data frame
dataframe = training_predictions.get_all_as_dataframe()
```

3. Download all prediction rows to a file as a CSV document:

```
import datarobot from dr

# Calculate new training predictions on all dataset
training_predictions_job = model.request_training_predictions(dr.enums.DATA_SUBSET.
->ALL)
training_predictions = training_predictions_job.get_result_when_complete()

# Fetch training predictions and save them to file
training_predictions.download_to_csv('my-training-predictions.csv')
```

Batch Predictions

The Batch Prediction API provides a way to score large datasets using flexible options for intake and output on the Prediction Servers you have already deployed.

The main features are:

- Flexible options for intake and output.
- Stream local files and start scoring while still uploading - while simultaneously downloading the results.
- Score large datasets from and to S3.
- Connect to your database using JDBC with bidirectional streaming of scoring data and results.
- Intake and output options can be mixed and doesn't need to match. So scoring from a JDBC source to an S3 target is also an option.
- Protection against overloading your prediction servers with the option to control the concurrency level for scoring.
- Prediction Explanations can be included (with option to add thresholds).
- Passthrough Columns are supported to correlate scored data with source data.
- Prediction Warnings can be included in the output.

To interact with Batch Predictions, you should use the *BatchPredictionJob* class.

Make batch predictions with a deployment

DataRobot provides a utility function to make batch predictions using a deployment: *Deployment.predict_batch*.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
# To note: `source` can be a file path, a file or a pandas DataFrame
prediction_results_as_dataframe = deployment.predict_batch(
    source="./my_local_file.csv",
)
```

Scoring local CSV files

We provide a small utility function for scoring from/to local CSV files: `BatchPredictionJob.score_to_file`. The first parameter can be either:

- Path to a CSV dataset
- File-like object
- Pandas DataFrame

For larger datasets, you should avoid using a DataFrame, as that will load the entire dataset into memory. The other options don't.

```
import datarobot as dr

deployment_id = '5dc5b1015e6e762a6241f9aa'

dr.BatchPredictionJob.score_to_file(
    deployment_id,
    './data_to_predict.csv',
    './predicted.csv',
)
```

The input file will be streamed to our API and scoring will start immediately. As soon as results start coming in, we will initiate the download concurrently. The entire call will block until the file has been scored.

Scoring from and to S3

We provide a small utility function for scoring from/to CSV files hosted on S3 `BatchPredictionJob.score_s3`. This requires that the intake and output buckets share the same credentials (see `Credentials` and `Credential.create_s3`) or that their access policy is set to public:

```
import datarobot as dr

deployment_id = '5dc5b1015e6e762a6241f9aa'

cred = dr.Credential.get('5a8ac9ab07a57a0001be501f')

job = dr.BatchPredictionJob.score_s3(
    deployment=deployment_id,
    source_url='s3://mybucket/data_to_predict.csv',
    destination_url='s3://mybucket/predicted.csv',
    credential=cred,
)
```

Note: The S3 output functionality has a limit of 100 GB.

Scoring from and to Azure Cloud Storage

Like with S3, we provide the same support for Azure through the utility function `BatchPredictionJob.score_azure`. This required that an Azure connection string has been added to the DataRobot credentials store. (see `Credentials` and `Credential.create_azure`)

```
import datarobot as dr

deployment_id = '5dc5b1015e6e762a6241f9aa'

cred = dr.Credential.get('5a8ac9ab07a57a0001be501f')

job = dr.BatchPredictionJob.score_azure(
    deployment=deployment_id,
    source_url='https://mybucket.blob.core.windows.net/bucket/data_to_predict.csv',
    destination_url='https://mybucket.blob.core.windows.net/results/predicted.csv',
    credential=cred,
)
```

Scoring from and to Google Cloud Platform

Like with Azure, we provide the same support for GCP through the utility function `BatchPredictionJob.score_gcp`. This required that an Azure connection string has been added to the DataRobot credentials store. (see `Credentials` and `Credential.create_gcp`)

```
import datarobot as dr

deployment_id = '5dc5b1015e6e762a6241f9aa'

cred = dr.Credential.get('5a8ac9ab07a57a0001be501f')

job = dr.BatchPredictionJob.score_gcp(
    deployment=deployment_id,
    source_url='gs://bucket/data_to_predict.csv',
    destination_url='gs://results/predicted.csv',
    credential=cred,
)
```

Wiring a Batch Prediction Job manually

If you can't use any of the utilities above, you are also free to configure your job manually. This requires configuring an intake and output option:

```
import datarobot as dr

deployment_id = '5dc5b1015e6e762a6241f9aa'

dr.BatchPredictionJob.score(
    deployment_id,
    intake_settings={
        'type': 's3',
        'url': 's3://public-bucket/data_to_predict.csv',
        'credential_id': '5a8ac9ab07a57a0001be501f',
    },
    output_settings={
        'type': 'localFile',
        'path': './predicted.csv',
    },
)
```

Credentials may be created with *Credentials API*.

Supported intake types

These are the supported intake types and descriptions of their configuration parameters:

Local file intake

This requires you to pass either a path to a CSV dataset, file-like object or a Pandas DataFrame as the `file` parameter:

```
intake_settings={
    'type': 'localFile',
    'file': './data_to_predict.csv',
}
```

S3 CSV intake

This requires you to pass an S3 URL to the CSV file your scoring in the `url` parameter:

```
intake_settings={
    'type': 's3',
    'url': 's3://public-bucket/data_to_predict.csv',
}
```

If the bucket is not publicly accessible, you can supply AWS credentials using the three parameters:

- `aws_access_key_id`
- `aws_secret_access_key`
- `aws_session_token`

And save it to the *Credential API*. Here is an example:

```
import datarobot as dr

# get to make sure it exists
credential_id = '5a8ac9ab07a57a0001be501f'
cred = dr.Credential.get(credential_id)

intake_settings={
    'type': 's3',
    'url': 's3://private-bucket/data_to_predict.csv',
    'credential_id': cred.credential_id,
}
```

JDBC intake

This requires you to create a *DataStore* and *Credential* for your database:

```
# get to make sure it exists
datastore_id = '5a8ac9ab07a57a0001be5010'
data_store = dr.DataStore.get(datastore_id)

credential_id = '5a8ac9ab07a57a0001be501f'
cred = dr.Credential.get(credential_id)

intake_settings = {
    'type': 'jdbc',
    'table': 'table_name',
    'schema': 'public', # optional, if supported by database
    'catalog': 'master', # optional, if supported by database
    'data_store_id': data_store.id,
    'credential_id': cred.credential_id,
}
```

BigQuery intake

This requires you to create a GCS *Credential* for your database:

```
# get to make sure it exists
credential_id = '5a8ac9ab07a57a0001be501f'
cred = dr.Credential.get(credential_id)

intake_settings = {
    'type': 'bigquery',
    'dataset': 'dataset_name',
    'table': 'table_or_view_name',
    'bucket': 'bucket_in_gcs',
    'credential_id': cred.credential_id,
}
```

AI Catalog intake

This requires you to create a *Dataset* and identify the *dataset_id* of that to use as input.

```
# get to make sure it exists
dataset_id = '5a8ac9ab07a57a0001be501f'
dataset = dr.Dataset.get(dataset_id)

intake_settings={
    'type': 'dataset',
    'dataset': dataset
}
```

Or, in case you want another *version_id* than the latest, supply your own.

```
# get to make sure it exists
dataset_id = '5a8ac9ab07a57a0001be501f'
dataset = dr.Dataset.get(dataset_id)

intake_settings={
    'type': 'dataset',
    'dataset': dataset,
```

(continues on next page)

(continued from previous page)

```
'dataset_version_id': 'another_version_id'  
}
```

Supported output types

These are the supported output types and descriptions of their configuration parameters:

Local file output

For local file output you have two options. You can either pass a `path` parameter and have the client block and download the scored data concurrently. This is the fastest way to get predictions as it will upload, score and download concurrently:

```
output_settings={  
    'type': 'localFile',  
    'path': './predicted.csv',  
}
```

Another option is to leave out the parameter and subsequently call `BatchPredictionJob.download` at your own convenience. The `BatchPredictionJob.score` call will then return as soon as the upload is complete.

If the job is not finished scoring, the call to `BatchPredictionJob.download` will start streaming the data that has been scored so far and block until more data is available.

You can poll for job completion using `BatchPredictionJob.get_status` or use `BatchPredictionJob.wait_for_completion` to wait.

```
import datarobot as dr  
  
deployment_id = '5dc5b1015e6e762a6241f9aa'  
  
job = dr.BatchPredictionJob.score(  
    deployment_id,  
    intake_settings={  
        'type': 'localFile',  
        'file': './data_to_predict.csv',  
    },  
    output_settings={  
        'type': 'localFile',  
    },  
)  
  
job.wait_for_completion()  
  
with open('./predicted.csv', 'wb') as f:  
    job.download(f)
```

S3 CSV output

This requires you to pass an S3 URL to the CSV file where the scored data should be saved to in the `url` parameter:

```
output_settings={
    'type': 's3',
    'url': 's3://public-bucket/predicted.csv',
}
```

Most likely, the bucket is not publicly accessible for writes, but you can supply AWS credentials using the three parameters:

- `aws_access_key_id`
- `aws_secret_access_key`
- `aws_session_token`

And save it to the *Credential API*. Here is an example:

```
# get to make sure it exists
credential_id = '5a8ac9ab07a57a0001be501f'
cred = dr.Credential.get(credential_id)

output_settings={
    'type': 's3',
    'url': 's3://private-bucket/predicted.csv',
    'credential_id': cred.credential_id,
}
```

JDBC output

Same as for the input, this requires you to create a *DataStore* and *Credential* for your database, but for *output_settings* you also need to specify *statementType*, which should be one of `datarobot.enums.AVAILABLE_STATEMENT_TYPES`:

```
# get to make sure it exists
datastore_id = '5a8ac9ab07a57a0001be5010'
data_store = dr.DataStore.get(datastore_id)

credential_id = '5a8ac9ab07a57a0001be501f'
cred = dr.Credential.get(credential_id)

output_settings = {
    'type': 'jdbc',
    'table': 'table_name',
    'schema': 'public', # optional, if supported by database
    'catalog': 'master', # optional, if supported by database
    'statementType': 'insert',
    'data_store_id': data_store.id,
    'credential_id': cred.credential_id,
}
```

BigQuery output

Same as for the input, this requires you to create a GCS *Credential* to access BigQuery:

```
# get to make sure it exists
credential_id = '5a8ac9ab07a57a0001be501f'
```

(continues on next page)

(continued from previous page)

```
cred = dr.Credential.get(credential_id)

output_settings = {
    'type': 'bigquery',
    'dataset': 'dataset_name',
    'table': 'table_name',
    'bucket': 'bucket_in_gcs',
    'credential_id': cred.credential_id,
}
```

Copying a previously submitted job

We provide a small utility function for submitting a job using parameters from a job previously submitted: *BatchPredictionJob.score_from_existing*. The first parameter is the job id of another job.

```
import datarobot as dr

previously_submitted_job_id = '5dc5b1015e6e762a6241f9aa'

dr.BatchPredictionJob.score_from_existing(
    previously_submitted_job_id,
)
```

Scoring an in-memory Pandas DataFrame

When working with DataFrames, we provide a method for scoring the data without first writing it to a CSV file and subsequently reading the data back from a CSV file.

This will also take care of joining the computed predictions into the existing DataFrame.

Use the method *BatchPredictionJob.score_pandas*. The first parameter is the deployment ID and then the DataFrame to score.

```
import datarobot as dr
import pandas as pd

deployment_id = '5dc5b1015e6e762a6241f9aa'

df = pd.read_csv('testdata/titanic_predict.csv')

job, df = dr.BatchPredictionJob.score_pandas(deployment_id, df)
```

The method returns a copy of the job status and the updated DataFrame with the predictions added. So your DataFrame will now contain the following extra columns:

- Survived_1_PREDICTION
- Survived_0_PREDICTION
- Survived_PREDICTION
- THRESHOLD
- POSITIVE_CLASS
- prediction_status

```
print(df)
  PassengerId  Pclass                               Name  ... Survived_
↪ PREDICTION  THRESHOLD  POSITIVE_CLASS
0           892      3                               Kelly, Mr. James  ...
↪           0          0.5                    1
1           893      3  Wilkes, Mrs. James (Ellen Needs)  ...
↪           1          0.5                    1
2           894      2           Myles, Mr. Thomas Francis  ...
↪           0          0.5                    1
3           895      3           Wirz, Mr. Albert  ...
↪           0          0.5                    1
4           896      3  Hirvonen, Mrs. Alexander (Helga E Lindqvist)  ...
↪           1          0.5                    1
..          ...      ...                               ...  ...
↪           ...      ...                               ...  ...
413          1305      3           Spector, Mr. Woolf  ...
↪           0          0.5                    1
414          1306      1  Oliva y Ocana, Dona. Fermina  ...
↪           0          0.5                    1
415          1307      3           Saether, Mr. Simon Sivertsen  ...
↪           0          0.5                    1
416          1308      3           Ware, Mr. Frederick  ...
↪           0          0.5                    1
417          1309      3  Peter, Master. Michael J  ...
↪           1          0.5                    1

[418 rows x 16 columns]
```

If you don't want all of them or if you're not happy with the names of the added columns, they can be modified using column remapping:

```
import datarobot as dr
import pandas as pd

deployment_id = '5dc5b1015e6e762a6241f9aa'

df = pd.read_csv('testdata/titanic_predict.csv')

job, df = dr.BatchPredictionJob.score_pandas(
    deployment_id,
    df,
    column_names_remapping={
        'Survived_1_PREDICTION': None,          # discard column
        'Survived_0_PREDICTION': None,          # discard column
        'Survived_PREDICTION': 'predicted',     # rename column
        'THRESHOLD': None,                      # discard column
        'POSITIVE_CLASS': None,                # discard column
    },
)
```

Any column mapped to `None` will be discarded. Any column mapped to a string will be renamed. Any column not mentioned will be kept in the output untouched. So your DataFrame will now contain the following extra columns:

- predicted
- prediction_status

Refer to the documentation for `BatchPredictionJob.score` for the full range of available options.

Batch Prediction Job Definitions

To submit a working Batch Prediction job, you must supply a variety of elements to the `datarobot.models.BatchPredictionJob.score()` request payload depending on what type of prediction is required. Additionally, you must consider the type of intake and output adapters used for a given job.

Every time a new Batch Prediction is created, the same amount of information must be stored somewhere outside of DataRobot and re-submitted every time.

For example, a request could look like:

```
import datarobot as dr

deployment_id = "5dc5b1015e6e762a6241f9aa"

job = dr.BatchPredictionJob.score(
    deployment_id,
    intake_settings={
        "type": "s3",
        "url": "s3://bucket/container/file.csv",
        "credential_id": "5dc5b1015e6e762a6241f9bb"
    },
    output_settings={
        "type": "s3",
        "url": "s3://bucket/container/output.csv",
        "credential_id": "5dc5b1015e6e762a6241f9bb"
    },
)

job.wait_for_completion()

with open("./predicted.csv", "wb") as f:
    job.download(f)
```

Job Definitions

If your use case requires the same, or close to the same, type of prediction to be done multiple times, you can choose to create a *Job Definition* of the Batch Prediction job and store this inside DataRobot for future use.

The method for creating job definitions is identical to the existing `datarobot.models.BatchPredictionJob.score()` method, except for the addition of a `enabled`, `name` and `schedule` parameter: `datarobot.models.BatchPredictionJobDefinition.create()`

```
>>> import datarobot as dr
>>> job_spec = {
...     "num_concurrent": 4,
...     "deployment_id": "5dc5b1015e6e762a6241f9aa",
...     "intake_settings": {
...         "url": "s3://foobar/123",
...         "type": "s3",
...         "format": "csv",
...         "credential_id": "5dc5b1015e6e762a6241f9bb"
...     },
...     "output_settings": {
...         "url": "s3://foobar/123",
...         "type": "s3",
```

(continues on next page)

(continued from previous page)

```

...     "format": "csv",
...     "credential_id": "5dc5b1015e6e762a6241f9bb"
... },
... }
>>> definition = BatchPredictionJobDefinition.create(
...     enabled=False,
...     batch_prediction_job=job_spec,
...     name="some_definition_name",
...     schedule=None
... )
>>> definition
BatchPredictionJobDefinition(fooobar)

```

Note: The name parameter must be unique across your organization. If you attempt to create multiple definitions with the same name, the request will fail. If you wish to free up a name, you must first `datarobot.models.BatchPredictionJobDefinition.delete()` the existing definition before creating this one. Alternatively you can just `datarobot.models.BatchPredictionJobDefinition.update()` the existing definition with a new name.

Executing a job definition

Manual job execution

To submit a stored job definition for scoring, you can either do so on a scheduled basis, described below, or manually submit the definition ID using `datarobot.models.BatchPredictionJobDefinition.run_once()`, as such:

```

>>> import datarobot as dr
>>> definition = dr.BatchPredictionJobDefinition.get("5dc5b1015e6e762a6241f9aa")
>>> job = definition.run_once()
>>> job.wait_for_completion()

```

Scheduled job execution

A Scheduled Batch Prediction job works just like a regular Batch Prediction job, except DataRobot handles the execution of the job.

In order to schedule the execution of a Batch Prediction job, a definition must first be created, using `datarobot.models.BatchPredictionJobDefinition.create()`, or updated, using `datarobot.models.BatchPredictionJobDefinition.update()`, where `enabled` is set to `True` and a schedule payload is provided.

Alternatively, you can use a short-hand version with `datarobot.models.BatchPredictionJobDefinition.run_on_schedule()` as such:

```

>>> import datarobot as dr
>>> schedule = {
...     "day_of_week": [
...         1
...     ],

```

(continues on next page)

(continued from previous page)

```
...     "month": [
...         "*"
...     ],
...     "hour": [
...         16
...     ],
...     "minute": [
...         0
...     ],
...     "day_of_month": [
...         1
...     ]
... }
>>> definition = dr.BatchPredictionJob.get("5dc5b1015e6e762a6241f9aa")
>>> job = definition.run_on_schedule(schedule)
```

If the created job was not enabled previously, this method will also enable it.

The Schedule payload

The `schedule` payload defines at what intervals the job should run, which can be combined in various ways to construct complex scheduling terms if needed. In all of the elements in the objects, you can supply either an asterisk `["*"]` denoting "every" time denomination or an array of integers (e.g. `[1, 2, 3]`) to define a specific interval.

Table 1: The `schedule` payload elements

Key	Possible values	Example	Description
minute	["*"] or [0 ... 59]	[15, 30, 45]	The job will run at these minute values for every hour of the day.
hour	["*"] or [0 ... 23]	[12, 23]	The hour(s) of the day that the job will run.
month	["*"] or [1 ... 12]	["jan"]	Strings, either 3-letter abbreviations or the full name of the month, can be used interchangeably (e.g., "jan" or "october"). Months that are not compatible with <code>day_of_month</code> are ignored, for example { <code>"day_of_month": [31],</code> <code>"month": ["feb"]</code> }.
day_of_week	["*"] or [0 ... 6] where (Sunday=0)	["sun"]	The day(s) of the week that the job will run. Strings, either 3-letter abbreviations or the full name of the day, can be used interchangeably (e.g., "sunday", "Sunday", "Sun", or "Sun", all map to [0]).
2.2. User Guide			NOTE: This field is additive with <code>day_of_month</code> , meaning the

Disabling a scheduled job

Job definitions are only be executed by the scheduler if `enabled` is set to `True`. If you have a job definition that was previously running as a scheduled job, but should now be stopped, simply `datarobot.models.BatchPredictionJobDefinition.delete()` to remove it completely, or `datarobot.models.BatchPredictionJobDefinition.update()` it with `enabled=False` if you want to keep the definition, but stop the scheduled job from executing at intervals. If a job is currently running, this will finish execution regardless.

```
>>> import datarobot as dr
>>> definition = dr.BatchPredictionJobDefinition.get("5dc5b1015e6e762a6241f9aa")
>>> definition.delete()
```

2.2.4 MLOps

DataRobot MLOps provides a central hub to deploy, monitor, manage, and govern all your models in production.

Deployments

Deployment is the central hub for users to deploy, manage and monitor their models.

Manage Deployments

The following commands can be used to manage deployments.

Create a Deployment

A new deployment can be created from:

- DataRobot model - use `create_from_learning_model()`
- Custom model version with dependency management - use `create_from_custom_model_version()`. Please refer to [Custom Model documentation](#) on how to create a custom model version

When creating a new deployment, a DataRobot `model_id/custom_model_image_id` and `label` must be provided. A `description` can be optionally provided to document the purpose of the deployment.

The default prediction server is used when making predictions against the deployment, and is a requirement for creating a deployment on DataRobot cloud. For on-prem installations, a user must not provide a default prediction server and a pre-configured prediction server will be used instead. Refer to `datarobot.PredictionServer.list` for more information on retrieving available prediction servers.

```
import datarobot as dr

project = dr.Project.get('5506fcd38bd88f5953219da0')
model = project.get_models()[0]
prediction_server = dr.PredictionServer.list()[0]

deployment = dr.Deployment.create_from_learning_model(
    model.id, label='New Deployment', description='A new deployment',
    default_prediction_server_id=prediction_server.id)
deployment
>>> Deployment('New Deployment')
```

List Deployments

Use the following command to list deployments a user can view.

```
import datarobot as dr

deployments = dr.Deployment.list()
deployments
>>> [Deployment('New Deployment'), Deployment('Previous Deployment')]
```

Refer to *Deployment* for properties of the deployment object.

You can also filter the deployments that are returned by passing an instance of the *DeploymentListFilters* class to the `filters` keyword argument.

```
import datarobot as dr

filters = dr.models.deployment.DeploymentListFilters(
    role='OWNER',
    accuracy_health=dr.enums.DEPLOYMENT_ACCURACY_HEALTH_STATUS.FAILING
)
deployments = dr.Deployment.list(filters=filters)
deployments
>>> [Deployment('Deployment Owned by Me w/ Failing Accuracy 1'), Deployment(
    ↪'Deployment Owned by Me w/ Failing Accuracy 2')]
```

Retrieve a Deployment

It is possible to retrieve a single deployment with its identifier, rather than list all deployments.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.id
>>> '5c939e08962d741e34f609f0'
deployment.label
>>> 'New Deployment'
```

Refer to *Deployment* for properties of the deployment object.

Update a Deployment

Deployment's label and description can be updated.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update(label='new label')
```

Delete a Deployment

To mark a deployment as deleted, use the following command.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.delete()
```

Activate or deactivate a Deployment

To activate a deployment, use the following command.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.activate()
deployment.status
>>> 'active'
```

To deactivate a deployment, use the following command.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.deactivate()
deployment.status
>>> 'inactive'
```

Make batch predictions with a deployment

DataRobot provides a small utility function to make batch predictions using a deployment: `Deployment.predict_batch`.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
# To note: `source` can be a file path, a file, or a pandas DataFrame
prediction_results_as_dataframe = deployment.predict_batch(
    source="./my_local_file.csv",
)
```

Model Replacement

A deployment's model can be replaced effortlessly with zero interruption of predictions.

Model replacement is an asynchronous process, which means some preparatory work may be performed after the initial request is completed. Predictions made against this deployment will start using the new model as soon as the request is completed. There will be no interruption for predictions throughout the process. The `replace_model()` function won't return until the asynchronous process is fully finished.

Alongside the identifier of the new model, a `reason` is also required. The reason is stored in model history of the deployment for bookkeeping purpose. An enum `MODEL_REPLACEMENT_REASON` is provided for convenience, all possible values are documented below:

- `MODEL_REPLACEMENT_REASON.ACCURACY`

- MODEL_REPLACEMENT_REASON.DATA_DRIFT
- MODEL_REPLACEMENT_REASON.ERRORS
- MODEL_REPLACEMENT_REASON.SCHEDULED_REFRESH
- MODEL_REPLACEMENT_REASON.SCORING_SPEED
- MODEL_REPLACEMENT_REASON.OTHER

Here is an example of model replacement:

```
import datarobot as dr
from datarobot.enums import MODEL_REPLACEMENT_REASON

project = dr.Project.get('5cc899abc191a20104ff446a')
model = project.get_models()[0]

deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.model['id'], deployment.model['type']
>>> ('5c0a979859b00004ba52e431', 'Decision Tree Classifier (Gini)')

deployment.replace_model('5c0a969859b00004ba52e41b', MODEL_REPLACEMENT_REASON.
↳ACCURACY)
deployment.model['id'], deployment.model['type']
>>> ('5c0a969859b00004ba52e41b', 'Support Vector Classifier (Linear Kernel)')
```

Validation

Before initiating the model replacement request, it is usually a good idea to use the `validate_replacement_model()` function to validate if the new model can be used as a replacement.

The `validate_replacement_model()` function returns the validation status, a message and a checks dictionary. If the status is `passing` or `warning`, use `replace_model()` to perform the replacement. If status is `failing`, refer to the `checks` dict for more details on why the new model cannot be used as a replacement.

```
import datarobot as dr

project = dr.Project.get('5cc899abc191a20104ff446a')
model = project.get_models()[0]
deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
status, message, checks = deployment.validate_replacement_model(new_model_id=model.id)
status
>>> 'passing'

# `checks` can be inspected for detail, showing two examples here:
checks['target']
>>> {'status': 'passing', 'message': 'Target is compatible.'}
checks['permission']
>>> {'status': 'passing', 'message': 'User has permission to replace model.'}
```

Monitoring

Deployment monitoring can be categorized into several area of concerns:

- Service Stats & Service Stats Over Time

- Accuracy & Accuracy Over Time

With a `Deployment` object, get functions are provided to allow querying of the monitoring data. Alternatively, it is also possible to retrieve monitoring data directly using a deployment ID. For example:

```
from datarobot.models import Deployment, ServiceStats

deployment_id = '5c939e08962d741e34f609f0'

# call `get` functions on a `Deployment` object
deployment = Deployment.get(deployment_id)
service_stats = deployment.get_service_stats()

# directly fetch without a `Deployment` object
service_stats = ServiceStats.get(deployment_id)
```

When querying monitoring data, a start and end time can be optionally provided, will accept either a datetime object or a string. Note that only top of the hour datetimes are accepted, for example: `2019-08-01T00:00:00Z`. By default, the end time of the query will be the next top of the hour, the start time will be 7 days before the end time.

In the over time variants, an optional `bucket_size` can be provided to specify the resolution of time buckets. For example, if start time is `2019-08-01T00:00:00Z`, end time is `2019-08-02T00:00:00Z` and `bucket_size` is `T1H`, then 24 time buckets will be generated, each providing data calculated over one hour. Use `construct_duration_string()` to help construct a bucket size string.

Note: The minimum bucket size is one hour.

Service Stats

Service stats are metrics tracking deployment utilization and how well deployments respond to prediction requests. Use `SERVICE_STAT_METRIC.ALL` to retrieve a list of supported metrics.

`ServiceStats` retrieves values for all service stats metrics; `ServiceStatsOverTime` can be used to fetch how one single metric changes over time.

```
from datetime import datetime
from datarobot.enums import SERVICE_STAT_METRIC
from datarobot.helpers.partitioning_methods import construct_duration_string
from datarobot.models import Deployment

deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
service_stats = deployment.get_service_stats(
    start_time=datetime(2019, 8, 1, hour=15),
    end_time=datetime(2019, 8, 8, hour=15)
)
service_stats[SERVICE_STAT_METRIC.TOTAL_PREDICTIONS]
>>> 12597

total_predictions = deployment.get_service_stats_over_time(
    start_time=datetime(2019, 8, 1, hour=15),
    end_time=datetime(2019, 8, 8, hour=15),
    bucket_size=construct_duration_string(days=1),
    metric=SERVICE_STAT_METRIC.TOTAL_PREDICTIONS
)
total_predictions.bucket_values
```

(continues on next page)

(continued from previous page)

```
>>> OrderedDict([(datetime.datetime(2019, 8, 1, 15, 0, tzinfo=tzutc()), 1610),
                 (datetime.datetime(2019, 8, 2, 15, 0, tzinfo=tzutc()), 2249),
                 (datetime.datetime(2019, 8, 3, 15, 0, tzinfo=tzutc()), 254),
                 (datetime.datetime(2019, 8, 4, 15, 0, tzinfo=tzutc()), 943),
                 (datetime.datetime(2019, 8, 5, 15, 0, tzinfo=tzutc()), 1967),
                 (datetime.datetime(2019, 8, 6, 15, 0, tzinfo=tzutc()), 2810),
                 (datetime.datetime(2019, 8, 7, 15, 0, tzinfo=tzutc()), 2775)])
```

Data Drift

Data drift describe how much the distribution of target or a feature has changed comparing to the training data. Deployment's target drift and feature drift can be retrieved separately using `datarobot.models.TargetDrift` and `datarobot.models.FeatureDrift`. Use `DATA_DRIFT_METRIC.ALL` to retrieve a list of supported metrics.

```
from datetime import datetime
from datarobot.enums import DATA_DRIFT_METRIC
from datarobot.models import Deployment, FeatureDrift

deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
target_drift = deployment.get_target_drift(
    start_time=datetime(2019, 8, 1, hour=15),
    end_time=datetime(2019, 8, 8, hour=15)
)
target_drift.drift_score
>>> 0.00408514

feature_drift_data = FeatureDrift.list(
    deployment_id='5c939e08962d741e34f609f0',
    start_time=datetime(2019, 8, 1, hour=15),
    end_time=datetime(2019, 8, 8, hour=15),
    metric=DATA_DRIFT_METRIC.HELLINGER
)
feature_drift = feature_drift_data[0]
feature_drift.name
>>> 'age'
feature_drift.drift_score
>>> 4.16981594
```

Accuracy

A collection of metrics are provided to measure the accuracy of a deployment's predictions. For deployments with classification model, use `ACCURACY_METRIC.ALL_CLASSIFICATION` for all supported metrics; in the case of deployment with regression model, use `ACCURACY_METRIC.ALL_REGRESSION` instead.

Similarly with Service Stats, `Accuracy` and `AccuracyOverTime` are provided to retrieve all default accuracy metrics and how one single metric change over time.

```
from datetime import datetime
from datarobot.enums import ACCURACY_METRIC
from datarobot.helpers.partitioning_methods import construct_duration_string
from datarobot.models import Deployment
```

(continues on next page)

(continued from previous page)

```

deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
accuracy = deployment.get_accuracy(
    start_time=datetime(2019, 8, 1, hour=15),
    end_time=datetime(2019, 8, 1, 15, 0)
)
accuracy[ACCURACY_METRIC.RMSE]
>>> 943.225

rmse = deployment.get_accuracy_over_time(
    start_time=datetime(2019, 8, 1),
    end_time=datetime(2019, 8, 3),
    bucket_size=construct_duration_string(days=1),
    metric=ACCURACY_METRIC.RMSE
)
rmse.bucket_values
>>> OrderedDict([(datetime.datetime(2019, 8, 1, 15, 0, tzinfo=tzutc()), 1777.190657),
                  (datetime.datetime(2019, 8, 2, 15, 0, tzinfo=tzutc()), 1613.140772)])

```

It is also possible to retrieve how multiple metrics changes over the same period of time, enabling easier side by side comparison across different metrics.

```

from datarobot.enums import ACCURACY_METRIC
from datarobot.models import Deployment

accuracy_over_time = AccuracyOverTime.get_as_dataframe(
    ram_app.id, [ACCURACY_METRIC.RMSE, ACCURACY_METRIC.GAMMA_DEVIANCE, ACCURACY_
↪METRIC.MAD])

```

Delete Data

Monitoring data accumulated on a deployment can be deleted using `delete_monitoring_data()`. A start and end timestamp could be provided to limit data deletion to certain time period.

Warning: Monitoring data is not recoverable once deleted.

```

import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.delete_monitoring_data(model_id=deployment.model['id'])

```

Settings

Drift Tracking Settings

Drift tracking is used to help analyze and monitor the performance of a model after it is deployed. When the model of a deployment is replaced drift tracking status will not be altered.

Use `get_drift_tracking_settings()` to retrieve the current tracking status for target drift and feature drift.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
settings = deployment.get_drift_tracking_settings()
settings
>>> {'target_drift': {'enabled': True}, 'feature_drift': {'enabled': True}}
```

Use `update_drift_tracking_settings()` to update target drift and feature drift tracking status.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update_drift_tracking_settings(target_drift_enabled=True, feature_drift_
↳enabled=True)
```

Association ID Settings

Association ID is used to identify predictions, so that when actuals are acquired, accuracy can be calculated.

Use `get_association_id_settings()` to retrieve current association ID settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
settings = deployment.get_association_id_settings()
settings
>>> {'column_names': ['application_id'], 'required_in_prediction_requests': True}
```

Use `update_association_id_settings()` to update association ID settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update_association_id_settings(column_names=['application_id'], required_
↳in_prediction_requests=True)
```

Predictions By Forecast Date

Forecast date setting for the deployment.

Use `get_predictions_by_forecast_date_settings()` to retrieve current predictions by forecast date settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
settings = deployment.get_predictions_by_forecast_date_settings()
settings
>>> {'enabled': False, 'column_name': 'date (actual)', 'datetime_format': '%Y-%m-%d'}
```

Use `update_predictions_by_forecast_date_settings()` to update predictions by forecast date settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update_predictions_by_forecast_date_settings(
    enable_predictions_by_forecast_date=True,
    forecast_date_column_name='date (actual)',
    forecast_date_format='%Y-%m-%d')
```

Challenger Models Settings

Challenger models can be used to compare the currently deployed model (the "champion" model) to another model.

Use `get_challenger_models_settings()` to retrieve current challenger model settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
settings = deployment.get_challenger_models_settings()
settings
>>> {'enabled': False}
```

Use `update_challenger_models_settings()` to update challenger models settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update_challenger_models_settings(challenger_models_enabled=True)
```

Segment Analysis Settings

Segment analysis is a deployment utility that filters data drift and accuracy statistics into unique segment attributes and values.

Use `get_segment_analysis_settings()` to retrieve current segment analysis settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
settings = deployment.get_segment_analysis_settings()
settings
>>> {'enabled': False, 'attributes': []}
```

Use `update_segment_analysis_settings()` to update segment analysis settings. Any categorical column can be a segment attribute.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update_segment_analysis_settings(
    segment_analysis_enabled=True,
    segment_analysis_attributes=["country_code", "is_customer"])
```

Predictions Data Collection Settings

Predictions Data Collection configures whether prediction requests and results should be saved to Predictions Data Storage.

Use `get_predictions_data_collection_settings()` to retrieve current settings of predictions data collection.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
settings = deployment.get_predictions_data_collection_settings()
settings
>>> {'enabled': True}
```

Use `update_predictions_data_collection_settings()` to update predictions data collection settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update_predictions_data_collection_settings(enabled=True)
```

Prediction Warning Settings

Prediction Warning is used to enable Humble AI for a deployment which determines if a model is misbehaving when a prediction goes outside of the calculated boundaries.

Use `get_prediction_warning_settings()` to retrieve the current prediction warning settings.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
settings = deployment.get_prediction_warning_settings()
settings
>>> {'enabled': True, 'custom_boundaries': {'upper': 1337, 'lower': 0}}
```

Use `update_prediction_warning_settings()` to update current prediction warning settings.

```
import datarobot as dr

# Set custom boundaries
deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.update_prediction_warning_settings(
    prediction_warning_enabled=True,
    use_default_boundaries=False,
    lower_boundary=1337,
    upper_boundary=2000,
)

# Reset boundaries
deployment.update_prediction_warning_settings(
    prediction_warning_enabled=True,
    use_default_boundaries=True,
)
```

Secondary Dataset Config Settings

The secondary dataset config for a deployed Feature discovery model can be replaced and retrieved.

Secondary dataset config is used to specify which secondary datasets to use during prediction for a given deployment.

Use `update_secondary_dataset_config()` to update the secondary dataset config.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
config = deployment.update_secondary_dataset_config(secondary_dataset_config_id=
↳ '5f48cb94408673683eca0fab')
config
>>> '5f48cb94408673683eca0fab'
```

Use `get_secondary_dataset_config()` to get the secondary dataset config.

```
import datarobot as dr

deployment = dr.Deployment.get(deployment_id='5c939e08962d741e34f609f0')
config = deployment.get_secondary_dataset_config()
config
>>> '5f48cb94408673683eca0fab'
```

Custom Models

Custom models provide users the ability to run arbitrary modeling code in an environment defined by the user.

Manage Execution Environments

Execution Environment defines the runtime environment for custom models. Execution Environment Version is a revision of Execution Environment with an actual runtime definition. Please refer to DataRobot User Models (<https://github.com/datarobot/datarobot-user-models>) for sample environments.

Create Execution Environment

To create an Execution Environment run:

```
import datarobot as dr

execution_environment = dr.ExecutionEnvironment.create(
    name="Python3 PyTorch Environment",
    description="This environment contains Python3 pytorch library.",
)

execution_environment.id
>>> '5b6b2315ca36c0108fc5d41b'
```

There are 2 ways to create an Execution Environment Version: synchronous and asynchronous.

Synchronous way means that program execution will be blocked until an Execution Environment Version creation process is finished with either success or failure:

```

import datarobot as dr

# use execution_environment created earlier

environment_version = dr.ExecutionEnvironmentVersion.create(
    execution_environment.id,
    docker_context_path="datarobot-user-models/public_dropin_environments/python3_
↳pytorch",
    max_wait=3600, # 1 hour timeout
)

environment_version.id
>>> '5eb538959bc057003b487b2d'
environment_version.build_status
>>> 'success'

```

Asynchronous way means that program execution will be not blocked, but an Execution Environment Version created will not be ready to be used for some time, until its creation process is finished. In such case, it will be required to manually call `refresh()` for the Execution Environment Version and check if its `build_status` is `success`. To create an Execution Environment Version without blocking a program, set `max_wait` to `None`:

```

import datarobot as dr

# use execution_environment created earlier

environment_version = dr.ExecutionEnvironmentVersion.create(
    execution_environment.id,
    docker_context_path="datarobot-user-models/public_dropin_environments/python3_
↳pytorch",
    max_wait=None, # set None to not block execution on this method
)

environment_version.id
>>> '5eb538959bc057003b487b2d'
environment_version.build_status
>>> 'processing'

# after some time
environment_version.refresh()
environment_version.build_status
>>> 'success'

```

If your environment requires additional metadata to be supplied for models using it, you can create an environment with additional metadata keys. Custom model versions that use this environment must specify values for these keys before they can be used to run tests or make deployments. The values will be baked in as environment variables with `field_name` as the environment variable name.

```

import datarobot as dr
from datarobot.models.execution_environment import RequiredMetadataKey

execution_environment = dr.ExecutionEnvironment.create(
    name="Python3 PyTorch Environment",
    description="This environment contains Python3 pytorch library.",
    required_metadata_keys=[
        RequiredMetadataKey(field_name="MY_VAR", display_name="A value needed by hte_
↳environment")
    ],
)

```

(continues on next page)

(continued from previous page)

```

)

model_version = dr.CustomModelVersion.create_clean(
    custom_model_id=custom_model.id,
    base_environment_id=execution_environment.id,
    folder_path=custom_model_folder,
    required_metadata={"MY_VAR": "a value"}
)

```

List Execution Environments

Use the following command to list execution environments available to the user.

```

import datarobot as dr

execution_environments = dr.ExecutionEnvironment.list()
execution_environments
>>> [ExecutionEnvironment('[DataRobot] Python 3 PyTorch Drop-In'),
↳ ExecutionEnvironment('[DataRobot] Java Drop-In')]

environment_versions = dr.ExecutionEnvironmentVersion.list(execution_environment.id)
environment_versions
>>> [ExecutionEnvironmentVersion('v1')]

```

Refer to *ExecutionEnvironment* for properties of the execution environment object and *ExecutionEnvironmentVersion* for properties of the execution environment object version.

You can also filter the execution environments that are returned by passing a string as *search_for* parameter - only the execution environments that contain the passed string in name or description will be returned.

```

import datarobot as dr

execution_environments = dr.ExecutionEnvironment.list(search_for='java')
execution_environments
>>> [ExecutionEnvironment('[DataRobot] Java Drop-In')]

```

Execution environment versions can be filtered by build status.

```

import datarobot as dr

environment_versions = dr.ExecutionEnvironmentVersion.list(
    execution_environment.id, dr.EXECUTION_ENVIRONMENT_VERSION_BUILD_STATUS.PROCESSING
)
environment_versions
>>> [ExecutionEnvironmentVersion('v1')]

```

Retrieve Execution Environment

To retrieve an execution environment and an execution environment version by identifier, rather than list all available ones, do the following:

```

import datarobot as dr

```

(continues on next page)

(continued from previous page)

```

execution_environment = dr.ExecutionEnvironment.get(execution_environment_id=
↳ '5506fcd38bd88f5953219da0')
execution_environment
>>> ExecutionEnvironment(['DataRobot'] Python 3 PyTorch Drop-In')

environment_version = dr.ExecutionEnvironmentVersion.get(
    execution_environment_id=execution_environment.id, version_id=
↳ '5eb538959bc057003b487b2d')
environment_version
>>> ExecutionEnvironmentVersion('v1')

```

Update Execution Environment

To update name and/or description of the execution environment run:

```

import datarobot as dr

execution_environment = dr.ExecutionEnvironment.get(execution_environment_id=
↳ '5506fcd38bd88f5953219da0')
execution_environment.update(name='new name', description='new description')

```

Delete Execution Environment

To delete the execution environment and execution environment version, use the following commands.

```

import datarobot as dr

execution_environment = dr.ExecutionEnvironment.get(execution_environment_id=
↳ '5506fcd38bd88f5953219da0')
execution_environment.delete()

```

Get Execution Environment build log

To get execution environment version build log run:

```

import datarobot as dr

environment_version = dr.ExecutionEnvironmentVersion.get(
    execution_environment_id='5506fcd38bd88f5953219da0', version_id=
↳ '5eb538959bc057003b487b2d')
log, error = environment_version.get_build_log()

```

Manage Custom Models

Custom Inference Model is user-defined modeling code that supports making predictions against it. Custom Inference Model supports regression and binary classification target types.

To upload actual modeling code Custom Model Version must be created for a custom model. Please see [Custom Model Version documentation](#).

Create Custom Inference Model

To create a regression Custom Inference Model run:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.create(
    name='Python 3 PyTorch Custom Model',
    target_type=dr.TARGET_TYPE.REGRESSION,
    target_name='MEDV',
    description='This is a Python3-based custom model. It has a simple PyTorch model_
↳built on boston housing',
    language='python'
)

custom_model.id
>>> '5b6b2315ca36c0108fc5d41b'
```

When creating a binary classification Custom Inference Model, *positive_class_label* and *negative_class_label* must be set:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.create(
    name='Python 3 PyTorch Custom Model',
    target_type=dr.TARGET_TYPE.BINARY,
    target_name='readmitted',
    positive_class_label='False',
    negative_class_label='True',
    description='This is a Python3-based custom model. It has a simple PyTorch model_
↳built on 10k_diabetes dataset',
    language='Python 3'
)

custom_model.id
>>> '5b6b2315ca36c0108fc5d41b'
```

When creating a multiclass classification Custom Inference Model, *class_labels* must be provided:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.create(
    name='Python 3 PyTorch Custom Model',
    target_type=dr.TARGET_TYPE.MULTICLASS,
    target_name='readmitted',
    class_labels=['hot dog', 'burrito', 'hoagie', 'reuben'],
    description='This is a Python3-based custom model. It has a simple PyTorch model_
↳built on sandwich dataset',
    language='Python 3'
)

custom_model.id
>>> '5b6b2315ca36c0108fc5d41b'
```

For convenience when there are many class labels, multiclass labels can also be provided as a file. The file should have all the class labels separated by newline:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.create(
    name='Python 3 PyTorch Custom Model',
    target_type=dr.TARGET_TYPE.MULTICLASS,
    target_name='readmitted',
    class_labels_file='/path/to/classlabels.txt',
    description='This is a Python3-based custom model. It has a simple PyTorch model_
↳built on sandwich dataset',
    language='Python 3'
)

custom_model.id
>>> '5b6b2315ca36c0108fc5d41b'
```

For unstructured model *target_name* parameter is optional and is ignored if provided. To create an unstructured Custom Inference Model run:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.create(
    name='Python 3 Unstructured Custom Model',
    target_type=dr.TARGET_TYPE.UNSTRUCTURED,
    description='This is a Python3-based unstructured model',
    language='python'
)

custom_model.id
>>> '5b6b2315ca36c0108fc5d41b'
```

For anomaly detection models, the *target_name* parameter is also optional and is ignored if provided. To create an anomaly Custom Inference Model run:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.create(
    name='Python 3 Unstructured Custom Model',
    target_type=dr.TARGET_TYPE.ANOMALY,
    description='This is a Python3-based anomaly detection model',
    language='python'
)

custom_model.id
>>> '5b6b2315ca36c0108fc5d41b'
```

To create a Custom Inference Model with specific k8s resources:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.create(
    name='Python 3 PyTorch Custom Model',
    target_type=dr.TARGET_TYPE.BINARY,
    target_name='readmitted',
    positive_class_label='False',
    negative_class_label='True',
    description='This is a Python3-based custom model. It has a simple PyTorch model_
↳built on 10k_diabetes dataset',
```

(continues on next page)

(continued from previous page)

```
language='Python 3',
maximum_memory=512*1024*1024,
)
```

Custom Inference Model k8s resources are optional and unless specifically provided, the configured defaults will be used.

List Custom Inference Models

Use the following command to list Custom Inference Models available to the user:

```
import datarobot as dr

dr.CustomInferenceModel.list()
>>> [CustomInferenceModel('my model 2'), CustomInferenceModel('my model 1')]

# use these parameters to filter results:
dr.CustomInferenceModel.list(
    is_deployed=True, # set to return only deployed models
    order_by='-updated', # set to define order of returned results
    search_for='model 1', # return only models containing 'model 1' in name or
    ↪description
)
>>> CustomInferenceModel('my model 1')
```

Please refer to `list()` for detailed parameter description.

Retrieve Custom Inference Model

To retrieve a specific Custom Inference Model, run:

```
import datarobot as dr

dr.CustomInferenceModel.get('5ebe95044024035cc6a65602')
>>> CustomInferenceModel('my model 1')
```

Update Custom Model

To update Custom Inference Model properties execute the following:

```
import datarobot as dr

custom_model = dr.CustomInferenceModel.get('5ebe95044024035cc6a65602')

custom_model.update(
    name='new name',
    description='new description',
)
```

Please, refer to `update()` for the full list of properties that can be updated.

Download latest revision of Custom Inference Model

To download content of the latest Custom Model Version of *CustomInferenceModel* as a ZIP archive:

```
import datarobot as dr

path_to_download = '/home/user/Documents/myModel.zip'

custom_model = dr.CustomInferenceModel.get('5ebe96b84024035cc6a6560b')

custom_model.download_latest_version(path_to_download)
```

Assign training data to Custom Inference Model

To assign training data to Custom Inference Model, run:

```
import datarobot as dr

path_to_dataset = '/home/user/Documents/trainingDataset.csv'
dataset = dr.Dataset.create_from_file(file_path=path_to_dataset)

custom_model = dr.CustomInferenceModel.get('5ebe96b84024035cc6a6560b')

custom_model.assign_training_data(dataset.id)
```

To assign training data without blocking a program, set *max_wait* to *None*:

```
import datarobot as dr

path_to_dataset = '/home/user/Documents/trainingDataset.csv'
dataset = dr.Dataset.create_from_file(file_path=path_to_dataset)

custom_model = dr.CustomInferenceModel.get('5ebe96b84024035cc6a6560b')

custom_model.assign_training_data(
    dataset.id,
    max_wait=None
)

custom_model.training_data_assignment_in_progress
>>> True

# after some time
custom_model.refresh()
custom_model.training_data_assignment_in_progress
>>> False
```

Note: training data must be assigned to retrieve feature impact from Custom Model Version. Please see to *Custom Model Version documentation*.

Manage Custom Model Versions

Modeling code for Custom Inference Models can be uploaded by creating a Custom Model Version. When creating a Custom Model Version, the version must be associated with a base execution environment. If the base environment supports additional model dependencies (R or Python environments) and the Custom Model Version contains a valid

requirements.txt file, the model version will run in an environment based on the base environment with the additional dependencies installed.

Create Custom Model Version

Upload actual custom model content by creating a clean Custom Model Version:

```
import os
import datarobot as dr

custom_model_folder = "datarobot-user-models/model_templates/python3_pytorch"

# add files from the folder to the custom model
model_version = dr.CustomModelVersion.create_clean(
    custom_model_id=custom_model.id,
    base_environment_id=execution_environment.id,
    folder_path=custom_model_folder,
)

custom_model.id
>>> '5b6b2315ca36c0108fc5d41b'

# or add a list of files to the custom model
model_version_2 = dr.CustomModelVersion.create_clean(
    custom_model_id=custom_model.id,
    files=[os.path.join(custom_model_folder, 'custom.py'), 'custom.py'],
)

# and/or set k8s resources to the custom model
model_version_3 = dr.CustomModelVersion.create_clean(
    custom_model_id=custom_model.id,
    files=[os.path.join(custom_model_folder, 'custom.py'), 'custom.py'],
    network_egress_policy=dr.NETWORK_EGRESS_POLICY.PUBLIC,
    maximum_memory=512*1024*1024,
    replicas=1,
)
```

To create a new Custom Model Version from a previous one, with just some files added or removed, do the following:

```
import os
import datarobot as dr

custom_model_folder = "datarobot-user-models/model_templates/python3_pytorch"

file_to_delete = model_version_2.items[0].id

model_version_3 = dr.CustomModelVersion.create_from_previous(
    custom_model_id=custom_model.id,
    base_environment_id=execution_environment.id,
    files=[os.path.join(custom_model_folder, 'custom.py'), 'custom.py'],
    files_to_delete=[file_to_delete],
)
```

Please refer to [CustomModelFileItem](#) for description of custom model file properties.

To create a new Custom Model Version from a previous one, with just new k8s resources values, do the following:

```
import os
import datarobot as dr

custom_model_folder = "datarobot-user-models/model_templates/python3_pytorch"

file_to_delete = model_version_2.items[0].id

model_version_3 = dr.CustomModelVersion.create_from_previous(
    custom_model_id=custom_model.id,
    base_environment_id=execution_environment.id,
    maximum_memory=1024*1024*1024,
)
```

List Custom Model Versions

Use the following command to list Custom Model Versions available to the user:

```
import datarobot as dr

dr.CustomModelVersion.list(custom_model.id)

>>> [CustomModelVersion('v2.0'), CustomModelVersion('v1.0')]
```

Retrieve Custom Model Version

To retrieve a specific Custom Model Version, run:

```
import datarobot as dr

dr.CustomModelVersion.get(custom_model.id, custom_model_version_id=
    → '5ebe96b84024035cc6a6560b')

>>> CustomModelVersion('v2.0')
```

Update Custom Model Version

To update Custom Model Version description execute the following:

```
import datarobot as dr

custom_model_version = dr.CustomModelVersion.get(
    custom_model.id,
    custom_model_version_id='5ebe96b84024035cc6a6560b',
)

custom_model_version.update(description='new description')

custom_model_version.description
>>> 'new description'
```

Download Custom Model Version

Download content of the Custom Model Version as a ZIP archive:

```
import datarobot as dr

path_to_download = '/home/user/Documents/myModel.zip'

custom_model_version = dr.CustomModelVersion.get(
    custom_model.id,
    custom_model_version_id='5ebe96b84024035cc6a6560b',
)

custom_model_version.download(path_to_download)
```

Start Custom Model Inference Legacy Conversion

Custom model version may include SAS files, with a main program entrypoint. In order to be able to use this model it is required to run a conversion. The conversion can later be fetched and examined by reading the conversion print-outs. By default, a conversion is initiated in a non-blocking mode. If a *max_wait* parameter is provided, than the call is blocked until the conversion is completed. The results can than be read by fetching the conversion entity.

```
import datarobot as dr

# Read a custom model version
custom_model_version = dr.CustomModelVersion.get(model_id, model_version_id)

# Find the main program item ID
main_program_item_id = None
for item in cm_ver.items:
    if item.file_name.lower().endswith('.sas'):
        main_program_item_id = item.id

# Execute the conversion
if async:
    # This is a non-blocking call
    conversion_id = dr.models.CustomModelVersionConversion.run_conversion(
        custom_model_version.custom_model_id,
        custom_model_version.id,
        main_program_item_id,
    )
else:
    # This call is blocked until a completion or a timeout
    conversion_id = dr.models.CustomModelVersionConversion.run_conversion(
        custom_model_version.custom_model_id,
        custom_model_version.id,
        main_program_item_id,
        max_wait=60,
    )
```

Monitor Custom Model Inference Legacy Conversion Process

If a custom model version conversion was initiated in a non-blocking mode, it is possible to monitor the progress as follows:

```

import datarobot as dr

while True:
    conversion = dr.models.CustomModelVersionConversion.get(
        custom_model_id, custom_model_version_id, conversion_id,
    )
    if conversion.conversion_in_progress:
        logging.info('Conversion is in progress...')
        time.sleep(1)
    else:
        if conversion.conversion_succeeded:
            logging.info('Conversion succeeded')
        else:
            logging.error(f'Conversion failed!\n{conversion.log_
↪message}')
        break

```

Stop a Custom Model Inference Legacy Conversion

It is possible to stop a custom model version conversion that is in progress. The call is non-blocking and you may keep monitoring the conversion progress (see above) until it is completed.

```

import datarobot as dr

dr.models.CustomModelVersionConversion.stop_conversion(
    custom_model_id, custom_model_version_id, conversion_id,
)

```

Calculate Custom ModelVersion feature impact

To trigger calculation of Custom Model Version feature impact, training data must be assigned to a Custom Inference Model. Please refer to *Custom Inference Model documentation*. If training data is assigned, run the following to trigger the calculation of the feature impact:

```

import datarobot as dr

version = dr.CustomModelVersion.get(custom_model.id, custom_model_version_id=
↪'5ebe96b84024035cc6a6560b')

version.calculate_feature_impact()

```

To trigger calculating feature impact without blocking a program, set *max_wait* to *None*:

```

import datarobot as dr

version = dr.CustomModelVersion.get(custom_model.id, custom_model_version_id=
↪'5ebe96b84024035cc6a6560b')

version.calculate_feature_impact(max_wait=None)

```

Retrieve Custom Inference Image feature impact

To retrieve Custom Model Version feature impact, it must be calculated beforehand. Please refer to *Custom Inference Image feature impact documentation*. Run the following to get feature impact:

```
import datarobot as dr

version = dr.CustomModelVersion.get(custom_model.id, custom_model_version_id=
↳ '5ebe96b84024035cc6a6560b')

version.get_feature_impact()
>>> [{'featureName': 'B', 'impactNormalized': 1.0, 'impactUnnormalized': 1.
↳ 1085356209402688, 'redundantWith': 'B'}...]
```

Preparing a Custom Model Version for Use

If your custom model version has dependencies, a dependency build must be completed before the model can be used. The dependency build installs your model's dependencies into the base environment associated with the model version.

Starting the Dependency Build

To start the Custom Model Version Dependency Build, run:

```
import datarobot as dr

build_info = dr.CustomModelVersionDependencyBuild.start_build(
    custom_model_id=custom_model.id,
    custom_model_version_id=model_version.id,
    max_wait=3600, # 1 hour timeout
)

build_info.build_status
>>> 'success'
```

To start Custom Model Version Dependency Build without blocking a program until the test finishes, set *max_wait* to *None*:

```
import datarobot as dr

build_info = dr.CustomModelVersionDependencyBuild.start_build(
    custom_model_id=custom_model.id,
    custom_model_version_id=model_version.id,
    max_wait=None,
)

build_info.build_status
>>> 'submitted'

# after some time
build_info.refresh()
build_info.build_status
>>> 'success'
```

In case the build fails, or you are just curious, do the following to retrieve the build log once complete:

```
print(build_info.get_log())
```

To cancel a Custom Model Version Dependency Build, simply run:

```
build_info.cancel()
```

Manage Custom Model Tests

A Custom Model Test represents testing performed on custom models.

Create Custom Model Test

To create Custom Model Test, run:

```
import datarobot as dr

path_to_dataset = '/home/user/Documents/testDataset.csv'
dataset = dr.Dataset.create_from_file(file_path=path_to_dataset)

custom_model_test = dr.CustomModelTest.create(
    custom_model_id=custom_model.id,
    custom_model_version_id=model_version.id,
    dataset_id=dataset.id,
    max_wait=3600, # 1 hour timeout
)

custom_model_test.overall_status
>>> 'succeeded'
```

or, with k8s resources:

```
import datarobot as dr

path_to_dataset = '/home/user/Documents/testDataset.csv'
dataset = dr.Dataset.create_from_file(file_path=path_to_dataset)

custom_model_test = dr.CustomModelTest.create(
    custom_model_id=custom_model.id,
    custom_model_version_id=model_version.id,
    dataset_id=dataset.id,
    max_wait=3600, # 1 hour timeout
    maximum_memory=1024*1024*1024,
)

custom_model_test.overall_status
>>> 'succeeded'
```

To start Custom Model Test without blocking a program until the test finishes, set *max_wait* to *None*:

```
import datarobot as dr

path_to_dataset = '/home/user/Documents/testDataset.csv'
dataset = dr.Dataset.create_from_file(file_path=path_to_dataset)
```

(continues on next page)

(continued from previous page)

```

custom_model_test = dr.CustomModelTest.create(
    custom_model_id=custom_model.id,
    custom_model_version_id=model_version.id,
    dataset_id=dataset.id,
    max_wait=None,
)

custom_model_test.overall_status
>>> 'in_progress'

# after some time
custom_model_test.refresh()
custom_model_test.overall_status
>>> 'succeeded'

```

Running a Custom Model Test uses the Custom Model Version's base image with its dependencies installed as an execution environment. To start Custom Model Test using an execution environment `as-is`, without the model's dependencies installed, supply an environment ID and (optionally) and environment version ID:

```

import datarobot as dr

path_to_dataset = '/home/user/Documents/testDataset.csv'
dataset = dr.Dataset.create_from_file(file_path=path_to_dataset)

custom_model_test = dr.CustomModelTest.create(
    custom_model_id=custom_model.id,
    custom_model_version_id=model_version.id,
    dataset_id=dataset.id,
    max_wait=3600, # 1 hour timeout
)

custom_model_test.overall_status
>>> 'succeeded'

```

In case a test fails, do the following to examine details of the failure:

```

for name, test in custom_model_test.detailed_status.items():
    print('Test: {}'.format(name))
    print('Status: {}'.format(test['status']))
    print('Message: {}'.format(test['message']))

print(custom_model_test.get_log())

```

To cancel a Custom Model Test, simply run:

```

custom_model_test.cancel()

```

To start Custom Model Test for an unstructured custom model, dataset details should not be provided:

```

import datarobot as dr

custom_model_test = dr.CustomModelTest.create(
    custom_model_id=custom_model.id,
    custom_model_version_id=model_version.id,
)

```

List Custom Model Tests

Use the following command to list Custom Model Tests available to the user:

```
import datarobot as dr

dr.CustomModelTest.list(custom_model_id=custom_model.id)
>>> [CustomModelTest('5ec262604024031bed5aaa16')]
```

Retrieve Custom Model Test

To retrieve a specific Custom Model Test, run:

```
import datarobot as dr

dr.CustomModelTest.get(custom_model_test_id='5ec262604024031bed5aaa16')
>>> CustomModelTest('5ec262604024031bed5aaa16')
```

2.2.5 Administration

The administration section provides details for users and administrators.

Credentials

Credentials for user with Database and Data Storage Connectivity can be stored by the system.

To interact with Credentials API, you should use the *Credential* class.

List credentials

In order to retrieve the list of all credentials accessible for current user you can use *Credential.list*.

```
import datarobot as dr

credentials = dr.Credential.list()
```

Each Credential object contains the *credential_id* string field which can be used e.g. in *Batch Predictions*.

Basic credentials

You can store generic user/password credentials:

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_basic(
...     name='my_db_cred',
...     user='<user>',
...     password='<password>',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e0f', 'my_db_cred', 'basic'),
```

(continues on next page)

(continued from previous page)

```
# store cred.credential_id

>>> cred = dr.Credential.get(credential_id)
>>> cred.credential_id
'5e429d6ecf8a5f36c5693e0f'
```

Stored credential can be used e.g. in *Batch Predictions for JDBC intake or output*.

S3 credentials

You can store AWS credentials using the three parameters:

- `aws_access_key_id`
- `aws_secret_access_key`
- `aws_session_token`

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_s3(
...     name='my_s3_cred',
...     aws_access_key_id='<aws access key id>',
...     aws_secret_access_key='<aws secret access key>',
...     aws_session_token='<aws session token>',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e03', 'my_s3_cred', 's3'),

# store cred.credential_id

>>> cred = dr.Credential.get(credential_id)
>>> cred.credential_id
'5e429d6ecf8a5f36c5693e03'
```

Stored credential can be used e.g. in *Batch Predictions for S3 intake or output*.

OAUTH credentials

You can store oauth credentials in the store:

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_oauth(
...     name='my_oauth_cred',
...     token='<token>',
...     refresh_token='<refresh_token>',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e0f', 'my_oauth_cred', 'oauth'),

# store cred.credential_id

>>> cred = dr.Credential.get(credential_id)
>>> cred.credential_id
'5e429d6ecf8a5f36c5693e0f'
```

Credential Data

For methods that accept credential data instead of user/password, or credential ID:

```
{
  "credentialType": "basic",
  "user": "user123",
  "password": "pass123",
}
```

```
{
  "credentialType": "s3",
  "awsAccessKeyId": "key123",
  "awsSecretAccessKey": "secret123",
}
```

```
{
  "credentialType": "oauth",
  "oauthRefreshToken": "token123",
  "oauthClientId": "client123",
  "oauthClientSecret": "secret123",
}
```

Sharing

Once you have created data stores, data sources, dataset, projects & calendar files, you may want to share them with collaborators. DataRobot provides an API for sharing the following entities:

- Data Sources and Data Stores (see *Database Connectivity* for more info on connecting to JDBC databases)
- Datasets
- Projects
- Calendar Files
- Model Deployments (Only in the REST API, not yet in this Python client)

Access Levels

Entities can be shared at varying access levels. For example, you can allow someone to create projects from a data source you have built without letting them delete it.

Each entity type uses slightly different permission names intended to convey more specifically what kind of actions are available, and these roles fall into three categories. These generic role names can be used in the sharing API for any entity.

For the complete set of actions granted by each role on a given entity, please see the user documentation in the web application.

- OWNER
 - used for all entities
 - allows any action including deletion
- READ_WRITE

- known as `EDITOR` on data sources and data stores
- allows modifications to the state, e.g. renaming and creating data sources from a data store, but *not* deleting the entity
- `READ_ONLY`
 - known as `CONSUMER` on data sources and data stores
 - for data sources, enables creating projects and predictions; for data stores, allows viewing them only.

Finally, when a user's new role is specified as `None`, their access will be revoked.

In addition to the role, some entities (currently only data sources and data stores) allow separate control over whether a new user should be able to share that entity further. When granting access to a user, the `can_share` parameter determines whether that user can, in turn, share this entity with another user. When this parameter is specified as `false`, the user in question will have all the access to the entity granted by their role and be able to remove themselves if desired, but be unable to change the role of any other user.

Examples

Transfer access to the data source from `old_user@datarobot.com` to `new_user@datarobot.com`

```
import datarobot as dr

new_access = dr.SharingAccess(
    "new_user@datarobot.com",
    dr.enums.SHARING_ROLE.OWNER,
    can_share=True,
)
access_list = [dr.SharingAccess("old_user@datarobot.com", None), new_access]

dr.DataSource.get('my-data-source-id').share(access_list)
```

Checking access to a project

```
import datarobot as dr

project = dr.Project.create('mydata.csv', project_name='My Data')

access_list = project.get_access_list()

access_list[0].username
```

Transfer ownership of all projects owned by your account to `new_user@datarobot.com` without sending notifications.

```
import datarobot as dr

# Put path to YAML credentials below
dr.Client(config_path= '.yaml')

# Get all projects for your account and store the ids in a list
projects = dr.Project.list()

project_ids = [project.id for project in projects]

# List of emails to share with
share_targets = ['new_user@datarobot.com']
```

(continues on next page)

(continued from previous page)

```
# Target role
target_role = dr.enums.SHARING_ROLE.OWNER

for pid in project_ids:

    project = dr.Project.get(project_id=pid)

    shares = []

    for user in share_targets:

        shares.append(dr.SharingAccess(username=user, role=target_role))

    project.share(shares, send_notification=False)
```


2.3 API Reference

2.3.1 Advanced Options

```

class datarobot.helpers.AdvancedOptions (weights: Optional[str] = None, re-
    sponse_cap: Union[bool, float, None] =
    None, blueprint_threshold: Optional[int]
    = None, seed: Optional[int] = None,
    smart_downsampled: Optional[bool] = None,
    majority_downsampling_rate: Optional[float]
    = None, offset: Optional[List[str]] = None,
    exposure: Optional[str] = None, accu-
    racy_optimized_mb: Optional[bool] = None,
    scaleout_modeling_mode: Optional[str]
    = None, events_count: Optional[str] =
    None, monotonic_increasing_featurelist_id:
    Optional[str] = None, mono-
    tonic_decreasing_featurelist_id: Optional[str]
    = None, only_include_monotonic_blueprints:
    Optional[bool] = None, al-
    lowed_pairwise_interaction_groups: Op-
    tional[List[Tuple[str, ...]]] = None,
    blend_best_models: Optional[bool] = None,
    scoring_code_only: Optional[bool] = None,
    prepare_model_for_deployment: Optional[bool] =
    None, consider_blenders_in_recommendation:
    Optional[bool] = None,
    min_secondary_validation_model_count:
    Optional[int] = None, shap_only_mode:
    Optional[bool] = None, autopi-
    lot_data_sampling_method: Optional[str]
    = None, run_leakage_removed_feature_list:
    Optional[bool] = None, autopi-
    lot_with_feature_discovery: Op-
    tional[bool] = False, fea-
    ture_discovery_supervised_feature_reduction:
    Optional[bool] = None, exponen-
    tially_weighted_moving_alpha: Optional[float] =
    None, external_time_series_baseline_dataset_id:
    Optional[str] = None,
    use_supervised_feature_reduction: Optional[bool]
    = True, primary_location_column: Optional[str]
    = None, protected_features: Optional[List[str]]
    = None, preferable_target_value: Optional[str]
    = None, fairness_metrics_set: Optional[str]
    = None, fairness_threshold: Optional[str]
    = None, bias_mitigation_feature_name: Op-
    tional[str] = None, bias_mitigation_technique:
    Optional[str] = None, in-
    clude_bias_mitigation_feature_as_predictor_variable:
    Optional[bool] = None, de-
    fault_monotonic_increasing_featurelist_id:
    Optional[str] = None, de-
    fault_monotonic_decreasing_featurelist_id:
    Optional[str] = None)

```

2.3. API Reference [API Reference](#) [Getting the target of a project to set advanced options of modeling process.](#)

Parameters

- weights** [string, optional] The name of a column indicating the weight of each row
- response_cap** [bool or float in [0.5, 1), optional] Defaults to none here, but server defaults to False. If specified, it is the quantile of the response distribution to use for response capping.
- blueprint_threshold** [int, optional] Number of hours models are permitted to run before being excluded from later autopilot stages Minimum 1
- seed** [int, optional] a seed to use for randomization
- smart_downsampled** [bool, optional] whether to use smart downsampling to throw away excess rows of the majority class. Only applicable to classification and zero-boosted regression projects.
- majority_downsampling_rate** [float, optional] the percentage between 0 and 100 of the majority rows that should be kept. Specify only if using smart downsampling. May not cause the majority class to become smaller than the minority class.
- offset** [list of str, optional] (New in version v2.6) the list of the names of the columns containing the offset of each row
- exposure** [string, optional] (New in version v2.6) the name of a column containing the exposure of each row
- accuracy_optimized_mb** [bool, optional] (New in version v2.6) Include additional, longer-running models that will be run by the autopilot and available to run manually.
- scaleout_modeling_mode** [string, optional] (Deprecated in 2.28. Will be removed in 2.30) DataRobot no longer supports scaleout models. Please remove any usage of this parameter as it will be removed from the API soon.
- events_count** [string, optional] (New in version v2.8) the name of a column specifying events count.
- monotonic_increasing_featurelist_id** [string, optional] (new in version 2.11) the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced. When specified, this will set a default for the project that can be overridden at model submission time if desired.
- monotonic_decreasing_featurelist_id** [string, optional] (new in version 2.11) the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. If None, no such constraints are enforced. When specified, this will set a default for the project that can be overridden at model submission time if desired.
- only_include_monotonic_blueprints** [bool, optional] (new in version 2.11) when true, only blueprints that support enforcing monotonic constraints will be available in the project or selected for the autopilot.
- allowed_pairwise_interaction_groups** [list of tuple, optional] (New in version v2.19) For GA2M models - specify groups of columns for which pairwise interactions will be allowed. E.g. if set to [(A, B, C), (C, D)] then GA2M models will allow interactions between columns AxB, BxC, AxC, CxD. All others (AxD, BxD) will not be considered.
- blend_best_models: bool, optional** (New in version v2.19) blend best models during Autopilot run.
- scoring_code_only: bool, optional** (New in version v2.19) Keep only models that can be converted to scorable java code during Autopilot run
- shap_only_mode: bool, optional** (New in version v2.21) Keep only models that support SHAP values during Autopilot run. Use SHAP-based insights wherever possible. Defaults to False.

prepare_model_for_deployment: bool, optional (New in version v2.19) Prepare model for deployment during Autopilot run. The preparation includes creating reduced feature list models, retraining best model on higher sample size, computing insights and assigning `RECOMMENDED FOR DEPLOYMENT` label.

consider_blenders_in_recommendation: bool, optional (New in version 2.22.0) Include blenders when selecting a model to prepare for deployment in an Autopilot Run. Defaults to False.

min_secondary_validation_model_count: int, optional (New in version v2.19) Compute `All backtest` scores (datetime models) or cross validation scores for the specified number of the highest ranking models on the Leaderboard, if over the Autopilot default.

autopilot_data_sampling_method: str, optional (New in version v2.23) one of `datarobot.enums.DATETIME_AUTOPILOT_DATA_SAMPLING_METHOD`. Applicable for OTV projects only, defines if autopilot uses `random` or `latest` sampling when iteratively building models on various training samples. Defaults to `random` for duration-based projects and to `latest` for row-based projects.

run_leakage_removed_feature_list: bool, optional (New in version v2.23) Run Autopilot on Leakage Removed feature list (if exists).

autopilot_with_feature_discovery: bool, default “False“, optional (New in version v2.23) If true, autopilot will run on a feature list that includes features found via search for interactions.

feature_discovery_supervised_feature_reduction: bool, optional (New in version v2.23) Run supervised feature reduction for feature discovery projects.

exponentially_weighted_moving_alpha: float, optional (New in version v2.26) defaults to None, value between 0 and 1 (inclusive), indicates alpha parameter used in exponentially weighted moving average within feature derivation window.

external_time_series_baseline_dataset_id: str, optional (New in version v2.26) If provided, will generate metrics scaled by external model predictions metric for time series projects. The external predictions catalog must be validated before autopilot starts, see `Project.validate_external_time_series_baseline` and [external baseline predictions documentation](#) for further explanation.

use_supervised_feature_reduction: bool, default “True‘ optional Time Series only. When true, during feature generation DataRobot runs a supervised algorithm to retain only qualifying features. Setting to false can severely impact autopilot duration, especially for datasets with many features.

primary_location_column: str, optional. The name of primary location column.

protected_features: list of str, optional. (New in version v2.24) A list of project features to mark as protected for Bias and Fairness testing calculations. Max number of protected features allowed is 10.

preferable_target_value: str, optional. (New in version v2.24) A target value that should be treated as a favorable outcome for the prediction. For example, if we want to check gender discrimination for giving a loan and our target is named `is_bad`, then the positive outcome for the prediction would be `No`, which means that the loan is good and that’s what we treat as a favorable result for the loaner.

fairness_metrics_set: str, optional. (New in version v2.24) Metric to use for calculating fairness. Can be one of `proportionalParity`, `equalParity`, `predictionBalance`, `trueFavorableAndUnfavorableRateParity` or

`favorableAndUnfavorablePredictiveValueParity`. Used and required only if *Bias & Fairness in AutoML* feature is enabled.

fairness_threshold: str, optional. (New in version v2.24) Threshold value for the fairness metric. Can be in a range of `[0.0, 1.0]`. If the relative (i.e. normalized) fairness score is below the threshold, then the user will see a visual indication on the

bias_mitigation_feature_name [str, optional] The feature from protected features that will be used in a bias mitigation task to mitigate bias

bias_mitigation_technique [str, optional] One of `datarobot.enums.BiasMitigationTechnique` Options: - `preprocessingReweighting` - `postProcessingRejectionOptionBasedClassification` The technique by which we'll mitigate bias, which will inform which bias mitigation task we insert into blueprints

include_bias_mitigation_feature_as_predictor_variable [bool, optional] Whether we should also use the mitigation feature as in input to the modeler just like any other categorical used for training, i.e. do we want the model to `train on` this feature in addition to using it for bias mitigation

default_monotonic_increasing_featurelist_id [str, optional] Returned from server on Project GET request - not able to be updated by user

default_monotonic_decreasing_featurelist_id [str, optional] Returned from server on Project GET request - not able to be updated by user

Examples

```
import datarobot as dr
advanced_options = dr.AdvancedOptions(
    weights='weights_column',
    offset=['offset_column'],
    exposure='exposure_column',
    response_cap=0.7,
    blueprint_threshold=2,
    smart_downsampled=True, majority_downsampling_rate=75.0)
```

update_individual_options (**kwargs) → None
Update individual attributes of an instance of `AdvancedOptions`.

2.3.2 Anomaly Assessment

class `datarobot.models.anomaly_assessment.AnomalyAssessmentRecord`(*status*, *status_details*, *start_date*, *end_date*, *prediction_threshold*, *pre-view_location*, *delete_location*, *lat-est_explanations_location*, ***record_kwargs*)

Object which keeps metadata about anomaly assessment insight for the particular subset, backtest and series and the links to proceed to get the anomaly assessment data.

New in version v2.25.

Notes

Record contains:

- `record_id`: the ID of the record.
- `project_id`: the project ID of the record.
- `model_id`: the model ID of the record.
- `backtest`: the backtest of the record.
- `source`: the source of the record.
- `series_id`: the series id of the record for the multiserries projects.
- `status`: the status of the insight.
- `status_details`: the explanation of the status.
- `start_date`: the ISO-formatted timestamp of the first prediction in the subset. Will be None if status is not *AnomalyAssessmentStatus.COMPLETED*.
- `end_date`: the ISO-formatted timestamp of the last prediction in the subset. Will be None if status is not *AnomalyAssessmentStatus.COMPLETED*.
- `prediction_threshold`: the threshold, all rows with anomaly scores greater or equal to it have shap explanations computed. Will be None if status is not *AnomalyAssessmentStatus.COMPLETED*.
- `preview_location`: URL to retrieve predictions preview for the subset. Will be None if status is not *AnomalyAssessmentStatus.COMPLETED*.
- `latest_explanations_location`: the URL to retrieve the latest predictions with the shap explanations. Will be None if status is not *AnomalyAssessmentStatus.COMPLETED*.
- `delete_location`: the URL to delete anomaly assessment record and relevant insight data.

Attributes

record_id: str The ID of the record.

project_id: str The ID of the project record belongs to.

model_id: str The ID of the model record belongs to.

backtest: int or `holdout` The backtest of the record.

source: `training` or `validation` The source of the record

series_id: str or None The series id of the record for the multiserries projects. Defined only for the multiserries projects.

status: str The status of the insight. One of `datarobot.enums.AnomalyAssessmentStatus`

status_details: str The explanation of the status.

start_date: str or None See `start_date` info in *Notes* for more details.

end_date: str or None See `end_date` info in *Notes* for more details.

prediction_threshold: float or None See `prediction_threshold` info in *Notes* for more details.

preview_location: str or None See `preview_location` info in *Notes* for more details.

latest_explanations_location: str or None See `latest_explanations_location` info in *Notes* for more details.

delete_location: str The URL to delete anomaly assessment record and relevant insight data.

classmethod list (*project_id, model_id, backtest=None, source=None, series_id=None, limit=100, offset=0, with_data_only=False*)

Retrieve the list of the anomaly assessment records for the project and model. Output can be filtered and limited.

Parameters

project_id: str The ID of the project record belongs to.

model_id: str The ID of the model record belongs to.

backtest: int or `holdout` The backtest to filter records by.

source: `training` or `validation` The source to filter records by.

series_id: str, optional The series id to filter records by. Can be specified for multiseries projects.

limit: int, optional 100 by default. At most this many results are returned.

offset: int, optional This many results will be skipped.

with_data_only: bool, False by default Filter by `status == AnomalyAssessmentStatus.COMPLETED`. If True, records with no data or not supported will be omitted.

Returns

AnomalyAssessmentRecord The anomaly assessment record.

classmethod compute (*project_id, model_id, backtest, source, series_id=None*)

Request anomaly assessment insight computation on the specified subset.

Parameters

project_id: str The ID of the project to compute insight for.

model_id: str The ID of the model to compute insight for.

backtest: int or `holdout` The backtest to compute insight for.

source: `training` or `validation` The source to compute insight for.

series_id: str, optional The series id to compute insight for. Required for multiseries projects.

Returns

AnomalyAssessmentRecord The anomaly assessment record.

delete ()

Delete anomaly assessment record with preview and explanations.

get_predictions_preview ()

Retrieve aggregated predictions statistics for the anomaly assessment record.

Returns

AnomalyAssessmentPredictionsPreview

get_latest_explanations ()

Retrieve latest predictions along with shap explanations for the most anomalous records.

Returns

AnomalyAssessmentExplanations

get_explanations (*start_date=None, end_date=None, points_count=None*)

Retrieve predictions along with shap explanations for the most anomalous records in the specified date range/for defined number of points. Two out of three parameters: `start_date`, `end_date` or `points_count` must be specified.

Parameters

start_date: str, optional The start of the date range to get explanations in. Example:
2020-01-01T00:00:00.000000Z

end_date: str, optional The end of the date range to get explanations in. Example:
2020-10-01T00:00:00.000000Z

points_count: int, optional The number of the rows to return.

Returns

AnomalyAssessmentExplanations

get_explanations_data_in_regions (*regions, prediction_threshold=0.0*)

Get predictions along with explanations for the specified regions, sorted by predictions in descending order.

Parameters

regions: list of preview_bins For each region explanations will be retrieved and merged.

prediction_threshold: float, optional If specified, only points with score greater or equal to the threshold will be returned.

Returns

dict in a form of `{'explanations': explanations, 'shap_base_value': shap_base_value}`

```
class datarobot.models.anomaly_assessment.AnomalyAssessmentExplanations (shap_base_value,  
                                                                    data,  
                                                                    start_date,  
                                                                    end_date,  
                                                                    count,  
                                                                    **record_kwargs)
```

Object which keeps predictions along with shap explanations for the most anomalous records in the specified date range/for defined number of points.

New in version v2.25.

Notes

AnomalyAssessmentExplanations contains:

- `record_id`: the id of the corresponding anomaly assessment record.
- `project_id`: the project ID of the corresponding anomaly assessment record.
- `model_id`: the model ID of the corresponding anomaly assessment record.
- `backtest`: the backtest of the corresponding anomaly assessment record.
- `source`: the source of the corresponding anomaly assessment record.
- `series_id`: the series id of the corresponding anomaly assessment record for the multiserries projects.

- `start_date`: the ISO-formatted first timestamp in the response. Will be `None` if there is no data in the specified range.
- `end_date`: the ISO-formatted last timestamp in the response. Will be `None` if there is no data in the specified range.
- `count`: The number of points in the response.
- `shap_base_value`: the shap base value.
- `data`: list of `DataPoint` objects in the specified date range.

`DataPoint` contains:

- `shap_explanation`: `None` or an array of up to 10 `ShapleyFeatureContribution` objects. Only rows with the highest anomaly scores have Shapley explanations calculated. Value is `None` if prediction is lower than `prediction_threshold`.
- `timestamp (str)`: ISO-formatted timestamp for the row.
- `prediction (float)`: The output of the model for this row.

`ShapleyFeatureContribution` contains:

- `feature_value (str)`: the feature value for this row. First 50 characters are returned.
- `strength (float)`: the shap value for this feature and row.
- `feature (str)`: the feature name.

Attributes

record_id: str The ID of the record.

project_id: str The ID of the project record belongs to.

model_id: str The ID of the model record belongs to.

backtest: int or `None` The backtest of the record.

source: `'training'` or `'validation'` The source of the record.

series_id: str or `None` The series id of the record for the multiserries projects. Defined only for the multiserries projects.

start_date: str or `None` The ISO-formatted datetime of the first row in the `data`.

end_date: str or `None` The ISO-formatted datetime of the last row in the `data`.

data: array of `'data_point'` objects or `None` See `data` info in *Notes* for more details.

shap_base_value: float Shap base value.

count: int The number of points in the `data`.

classmethod `get` (`project_id`, `record_id`, `start_date=None`, `end_date=None`, `points_count=None`)

Retrieve predictions along with shap explanations for the most anomalous records in the specified date range/for defined number of points. Two out of three parameters: `start_date`, `end_date` or `points_count` must be specified.

Parameters

project_id: str The ID of the project.

record_id: str The ID of the anomaly assessment record.

start_date: str, optional The start of the date range to get explanations in. Example:
2020-01-01T00:00:00.000000Z

end_date: str, optional The end of the date range to get explanations in. Example:
2020-10-01T00:00:00.000000Z

points_count: int, optional The number of the rows to return.

Returns

AnomalyAssessmentExplanations

class datarobot.models.anomaly_assessment.**AnomalyAssessmentPredictionsPreview** (*start_date*,
end_date,
pre-
view_bins,
***record_kwargs*)

Aggregated predictions over time for the corresponding anomaly assessment record. Intended to find the bins with highest anomaly scores.

New in version v2.25.

Notes

AnomalyAssessmentPredictionsPreview contains:

- **record_id**: the id of the corresponding anomaly assessment record.
- **project_id**: the project ID of the corresponding anomaly assessment record.
- **model_id**: the model ID of the corresponding anomaly assessment record.
- **backtest**: the backtest of the corresponding anomaly assessment record.
- **source**: the source of the corresponding anomaly assessment record.
- **series_id**: the series id of the corresponding anomaly assessment record for the multiserries projects.
- **start_date**: the ISO-formatted timestamp of the first prediction in the subset.
- **end_date**: the ISO-formatted timestamp of the last prediction in the subset.
- **preview_bins**: list of PreviewBin objects. The aggregated predictions for the subset. Bins boundaries may differ from actual start/end dates because this is an aggregation.

PreviewBin contains:

- **start_date (str)**: the ISO-formatted datetime of the start of the bin.
- **end_date (str)**: the ISO-formatted datetime of the end of the bin.
- **avg_predicted (float or None)**: the average prediction of the model in the bin. None if there are no entries in the bin.
- **max_predicted (float or None)**: the maximum prediction of the model in the bin. None if there are no entries in the bin.
- **frequency (int)**: the number of the rows in the bin.

Attributes

record_id: str The ID of the record.

project_id: str The ID of the project record belongs to.

model_id: **str** The ID of the model record belongs to.

backtest: **int** or **â€œholdoutâ€œ** The backtest of the record.

source: **â€œtrainingâ€œ** or **â€œvalidationâ€œ** The source of the record

series_id: **str** or **None** The series id of the record for the multiserries projects. Defined only for the multiserries projects.

start_date: **str** the ISO-formatted timestamp of the first prediction in the subset.

end_date: **str** the ISO-formatted timestamp of the last prediction in the subset.

preview_bins: **list of preview_bin objects.** The aggregated predictions for the subset. See more info in *Notes*.

classmethod **get** (*project_id, record_id*)

Retrieve aggregated predictions over time.

Parameters

project_id: **str** The ID of the project.

record_id: **str** The ID of the anomaly assessment record.

Returns

AnomalyAssessmentPredictionsPreview

find_anomalous_regions (*max_prediction_threshold=0.0*)

Sort preview bins by **max_predicted value** and select those with **max predicted value** greater or equal to max prediction threshold. Sort the result by max predicted value in descending order.

Parameters

max_prediction_threshold: **float, optional** Return bins with maximum anomaly score greater or equal to max_prediction_threshold.

Returns

preview_bins: **list of preview_bin** Filtered and sorted preview bins

2.3.3 Batch Predictions

class `datarobot.models.BatchPredictionJob` (*data: Dict[str, Any], completed_resource_url: Optional[str] = None*)

A Batch Prediction Job is used to score large data sets on prediction servers using the Batch Prediction API.

Attributes

id [str] the id of the job

```
classmethod score (deployment: DeploymentType, intake_settings: Optional[IntakeSettings]
= None, output_settings: Optional[OutputSettings] = None,
csv_settings: Optional[CsvSettings] = None, timeseries_settings: Op-
tional[TimeSeriesSettings] = None, num_concurrent: Optional[int] = None,
chunk_size: Optional[Union[int, str]] = None, passthrough_columns: Op-
tional[List[str]] = None, passthrough_columns_set: Optional[str] = None,
max_explanations: Optional[int] = None, max_ngram_explanations: Op-
tional[Union[int, str]] = None, threshold_high: Optional[float] = None,
threshold_low: Optional[float] = None, prediction_warning_enabled:
Optional[bool] = None, include_prediction_status: bool = False,
skip_drift_tracking: bool = False, prediction_instance: Op-
tional[PredictionInstance] = None, abort_on_error: bool = True,
column_names_remapping: Optional[Dict[str, str]] = None, in-
clude_probabilities: bool = True, include_probabilities_classes: Op-
tional[List[str]] = None, download_timeout: Optional[int] = 120, down-
load_read_timeout: Optional[int] = 660, upload_read_timeout: Optional[int]
= 600, explanations_mode: Optional[PredictionExplanationsMode] = None)
→ BatchPredictionJob
```

Create new batch prediction job, upload the scoring dataset and return a batch prediction job.

The default intake and output options are both *localFile* which requires the caller to pass the *file* parameter and either download the results using the *download()* method afterwards or pass a path to a file where the scored data will be downloaded to afterwards.

Returns

BatchPredictionJob Instance of BatchPredictionJob

Attributes

deployment [Deployment or string ID] Deployment which will be used for scoring.

intake_settings [dict (optional)] A dict configuring how data is coming from. Supported options:

- *type* : string, either *localFile*, *s3*, *azure*, *gcp*, *dataset*, *jdbc snowflake*, *synapse* or *bigquery*

Note that to pass a dataset, you not only need to specify the *type* parameter as *dataset*, but you must also set the *dataset* parameter as a *dr.Dataset* object.

To score from a local file, add the this parameter to the settings:

- *file* : file-like object, string path to file or a pandas.DataFrame of scoring data

To score from S3, add the next parameters to the settings:

- *url* : string, the URL to score (e.g.: *s3://bucket/key*)
- *credential_id* : string (optional)
- *endpoint_url* : string (optional), any non-default endpoint URL for S3 access (omit to use the default)

To score from JDBC, add the next parameters to the settings:

- *data_store_id* : string, the ID of the external data store connected to the JDBC data source (see [Database Connectivity](#)).
- *query* : string (optional if *table*, *schema* and/or *catalog* is specified), a self-supplied SELECT statement of the data set you wish to predict.
- *table* : string (optional if *query* is specified), the name of specified database table.

- `schema` : string (optional if `query` is specified), the name of specified database schema.
- `catalog` : string (optional if `query` is specified), (new in v2.22) the name of specified database catalog.
- `fetch_size` : int (optional), Changing the `fetchSize` can be used to balance throughput and memory usage.
- `credential_id` : string (optional) the ID of the credentials holding information about a user with read-access to the JDBC data source (see [Credentials](#)).

output_settings [dict (optional)] A dict configuring how scored data is to be saved. Supported options:

- `type` : string, either `localFile`, `s3`, `azure`, `gcp`, `jdbc`, `snowflake`, `synapse` or `bigquery`

To save scored data to a local file, add this parameters to the settings:

- `path` : string (optional), path to save the scored data as CSV. If a path is not specified, you must download the scored data yourself with `job.download()`. If a path is specified, the call will block until the job is done. if there are no other jobs currently processing for the targeted prediction instance, uploading, scoring, downloading will happen in parallel without waiting for a full job to complete. Otherwise, it will still block, but start downloading the scored data as soon as it starts generating data. This is the fastest method to get predictions.

To save scored data to S3, add the next parameters to the settings:

- `url` : string, the URL for storing the results (e.g.: `s3://bucket/key`)
- `credential_id` : string (optional)
- `endpoint_url` : string (optional), any non-default endpoint URL for S3 access (omit to use the default)

To save scored data to JDBC, add the next parameters to the settings:

- `data_store_id` : string, the ID of the external data store connected to the JDBC data source (see [Database Connectivity](#)).
- `table` : string, the name of specified database table.
- `schema` : string (optional), the name of specified database schema.
- `catalog` : string (optional), (new in v2.22) the name of specified database catalog.
- `statement_type` : string, the type of insertion statement to create, one of `datarobot.enums.AVAILABLE_STATEMENT_TYPES`.
- `update_columns` : list(string) (optional), a list of strings containing those column names to be updated in case `statement_type` is set to a value related to update or upsert.
- `where_columns` : list(string) (optional), a list of strings containing those column names to be selected in case `statement_type` is set to a value related to insert or update.
- `credential_id` : string, the ID of the credentials holding information about a user with write-access to the JDBC data source (see [Credentials](#)).
- `create_table_if_not_exists` : bool (optional), If no existing table is detected, attempt to create it before writing data with the strategy defined in the `statementType` parameter.

csv_settings [dict (optional)] CSV intake and output settings. Supported options:

- *delimiter* : string (optional, default `,`), fields are delimited by this character. Use the string *tab* to denote TSV (TAB separated values). Must be either a one-character string or the string *tab*.
- *quotechar* : string (optional, default `â€œ`), fields containing the delimiter must be quoted using this character.
- *encoding* : string (optional, default `utf-8`), encoding for the CSV files. For example (but not limited to): *shift_jis*, *latin_1* or *mkskanji*.

timeseries_settings [dict (optional)] Configuration for time-series scoring. Supported options:

- *type* : string, must be *forecast* or *historical* (default if not passed is *forecast*). *forecast* mode makes predictions using *forecast_point* or rows in the dataset without target. *historical* enables bulk prediction mode which calculates predictions for all possible forecast points and forecast distances in the dataset within *predictions_start_date*/*predictions_end_date* range.
- *forecast_point* : datetime (optional), forecast point for the dataset, used for the forecast predictions, by default value will be inferred from the dataset. May be passed if `timeseries_settings.type=forecast`.
- *predictions_start_date* : datetime (optional), used for historical predictions in order to override date from which predictions should be calculated. By default value will be inferred automatically from the dataset. May be passed if `timeseries_settings.type=historical`.
- *predictions_end_date* : datetime (optional), used for historical predictions in order to override date from which predictions should be calculated. By default value will be inferred automatically from the dataset. May be passed if `timeseries_settings.type=historical`.
- *relax_known_in_advance_features_check* : bool, (default *False*). If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

num_concurrent [int (optional)] Number of concurrent chunks to score simultaneously. Defaults to the available number of cores of the deployment. Lower it to leave resources for real-time scoring.

chunk_size [string or int (optional)] Which strategy should be used to determine the chunk size. Can be either a named strategy or a fixed size in bytes. - auto: use fixed or dynamic based on flipper - fixed: use 1MB for explanations, 5MB for regular requests - dynamic: use dynamic chunk sizes - int: use this many bytes per chunk

passthrough_columns [list[string] (optional)] Keep these columns from the scoring dataset in the scored dataset. This is useful for correlating predictions with source data.

passthrough_columns_set [string (optional)] To pass through every column from the scoring dataset, set this to *all*. Takes precedence over *passthrough_columns* if set.

max_explanations [int (optional)] Compute prediction explanations for this amount of features.

max_ngram_explanations [int or str (optional)] Compute text explanations for this amount of ngrams. Set to *all* to return all ngram explanations, or set to a positive integer value to limit the amount of ngram explanations returned. By default no ngram explanations will be computed and returned.

threshold_high [float (optional)] Only compute prediction explanations for predictions above this threshold. Can be combined with *threshold_low*.

threshold_low [float (optional)] Only compute prediction explanations for predictions below this threshold. Can be combined with *threshold_high*.

explanations_mode [PredictionExplanationsMode, optional] Mode of prediction explanations calculation for multiclass and clustering models, if not specified - server default is to explain only the predicted class, identical to passing TopPredictionsMode(1).

prediction_warning_enabled [boolean (optional)] Add prediction warnings to the scored data. Currently only supported for regression models.

include_prediction_status [boolean (optional)] Include the prediction_status column in the output, defaults to *False*.

skip_drift_tracking [boolean (optional)] Skips drift tracking on any predictions made from this job. This is useful when running non-production workloads to not affect drift tracking and cause unnecessary alerts. Defaults to *False*.

prediction_instance [dict (optional)] Defaults to instance specified by deployment or system configuration. Supported options:

- *hostName* : string
- *sslEnabled* : boolean (optional, default *true*). Set to *false* to run prediction requests from the batch prediction job without SSL.
- *datarobotKey* : string (optional), if running a job against a prediction instance in the Managed AI Cloud, you must provide the organization level DataRobot-Key
- *apiKey* : string (optional), by default, prediction requests will use the API key of the user that created the job. This allows you to make requests on behalf of other users.

abort_on_error [boolean (optional)] Default behavior is to abort the job if too many rows fail scoring. This will free up resources for other jobs that may score successfully. Set to *false* to unconditionally score every row no matter how many errors are encountered. Defaults to *True*.

column_names_remapping [dict (optional)] Mapping with column renaming for output table. Defaults to *{}*.

include_probabilities [boolean (optional)] Flag that enables returning of all probability columns. Defaults to *True*.

include_probabilities_classes [list (optional)] List the subset of classes if a user doesn't want all the classes. Defaults to *[]*.

download_timeout [int (optional)] New in version 2.22.

If using localFile output, wait this many seconds for the download to become available. See *download()*.

download_read_timeout [int (optional, default 660)] New in version 2.22.

If using localFile output, wait this many seconds for the server to respond between chunks.

upload_read_timeout: int (optional, default 600) New in version 2.28.

If using localFile intake, wait this many seconds for the server to respond after whole dataset upload.

classmethod `apply_time_series_data_prep_and_score` (*deployment*: *Deployment*, *intake_settings*: *IntakeSettings*, *timeseries_settings*: *TimeSeriesSettings*, ***kwargs*) → *BatchPredictionJob*

Prepare the dataset with time series data prep, create new batch prediction job, upload the scoring dataset, and return a batch prediction job.

The supported *intake_settings* are of type *localFile* or *dataset*.

For *timeseries_settings* of type *forecast* the *forecast_point* must be specified.

Refer to the `datarobot.models.BatchPredictionJob.score()` method for details on the other *kwargs* parameters.

New in version v3.1.

Returns

BatchPredictionJob Instance of *BatchPredictionJob*

Raises

InvalidUsageError If the deployment does not support time series data prep. If the intake type is not supported for time series data prep.

Attributes

deployment [*Deployment*] Deployment which will be used for scoring.

intake_settings [dict] A dict configuring where data is coming from. Supported options:

- *type* : string, either *localFile*, *dataset*

Note that to pass a dataset, you not only need to specify the *type* parameter as *dataset*, but you must also set the *dataset* parameter as a *Dataset* object.

To score from a local file, add this parameter to the settings:

- *file* : file-like object, string path to file or a pandas.DataFrame of scoring data.

timeseries_settings [dict] Configuration for time-series scoring. Supported options:

- *type* : string, must be *forecast* or *historical* (default if not passed is *forecast*). *forecast* mode makes predictions using *forecast_point*. *historical* enables bulk prediction mode which calculates predictions for all possible forecast points and forecast distances in the dataset within *predictions_start_date*/*predictions_end_date* range.
- *forecast_point* : datetime (optional), forecast point for the dataset, used for the forecast predictions. Must be passed if `timeseries_settings.type=forecast`.
- *predictions_start_date* : datetime (optional), used for historical predictions in order to override date from which predictions should be calculated. By default value will be inferred automatically from the dataset. May be passed if `timeseries_settings.type=historical`.
- *predictions_end_date* : datetime (optional), used for historical predictions in order to override date from which predictions should be calculated. By default value will be inferred automatically from the dataset. May be passed if `timeseries_settings.type=historical`.
- *relax_known_in_advance_features_check* : bool, (default *False*). If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

classmethod `score_to_file` (*deployment*: *DeploymentType*, *intake_path*, *output_path*: *str*,
***kwargs*)

Create new batch prediction job, upload the scoring dataset and download the scored CSV file concurrently.

Will block until the entire file is scored.

Refer to the `datarobot.models.BatchPredictionJob.score()` method for details on the other *kwargs* parameters.

Returns

BatchPredictionJob Instance of `BatchPredictionJob`

Attributes

deployment [Deployment or string ID] Deployment which will be used for scoring.

intake_path [file-like object/string path to file/pandas.DataFrame] Scoring data

output_path [str] Filename to save the result under

classmethod `apply_time_series_data_prep_and_score_to_file` (*deployment*:
Deployment,
intake_path:
Union[str,
pd.DataFrame,
io.IOBase],
output_path:
str, *time-*
series_settings:
TimeSeriesSet-
tings, ***kwargs*)
→ `BatchPredictionJob`

Prepare the input dataset with time series data prep. Then, create a new batch prediction job using the prepared AI catalog item as input and concurrently download the scored CSV file.

The function call will return when the entire file is scored.

For `timeseries_settings` of type `forecast` the `forecast_point` must be specified.

Refer to the `datarobot.models.BatchPredictionJob.score()` method for details on the other *kwargs* parameters.

New in version v3.1.

Returns

BatchPredictionJob Instance of `BatchPredictionJob`.

Raises

InvalidUsageError If the deployment does not support time series data prep.

Attributes

deployment [Deployment] The deployment which will be used for scoring.

intake_path [file-like object/string path to file/pandas.DataFrame] The scoring data.

output_path [str] The filename under which you save the result.

timeseries_settings [dict] Configuration for time-series scoring. Supported options:

- *type* : string, must be *forecast* or *historical* (default if not passed is *forecast*). *forecast* mode makes predictions using *forecast_point*. *historical* enables bulk prediction mode which calculates predictions for all possible forecast points and forecast distances in the dataset within *predictions_start_date*/*predictions_end_date* range.
- *forecast_point* : datetime (optional), forecast point for the dataset, used for the forecast predictions. Must be passed if `timeseries_settings.type=forecast`.
- *predictions_start_date* : datetime (optional), used for historical predictions in order to override date from which predictions should be calculated. By default value will be inferred automatically from the dataset. May be passed if `timeseries_settings.type=historical`.
- *predictions_end_date* : datetime (optional), used for historical predictions in order to override date from which predictions should be calculated. By default value will be inferred automatically from the dataset. May be passed if `timeseries_settings.type=historical`.
- *relax_known_in_advance_features_check* : bool, (default *False*). If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

classmethod score_s3 (*deployment*: *DeploymentType*, *source_url*: *str*, *destination_url*: *str*, *credential*=*None*, *endpoint_url*: *Optional[str]* = *None*, ***kwargs*)

Create new batch prediction job, with a scoring dataset from S3 and writing the result back to S3.

This returns immediately after the job has been created. You must poll for job completion using `get_status()` or `wait_for_completion()` (see `datarobot.models.Job`)

Refer to the `datarobot.models.BatchPredictionJob.score()` method for details on the other *kwargs* parameters.

Returns

BatchPredictionJob Instance of `BatchPredictionJob`

Attributes

deployment [Deployment or string ID] Deployment which will be used for scoring.

source_url [string] The URL for the prediction dataset (e.g.: `s3://bucket/key`)

destination_url [string] The URL for the scored dataset (e.g.: `s3://bucket/key`)

credential [string or Credential (optional)] The AWS Credential object or credential id

endpoint_url [string (optional)] Any non-default endpoint URL for S3 access (omit to use the default)

classmethod score_azure (*deployment*: *DeploymentType*, *source_url*: *str*, *destination_url*: *str*, *credential*=*None*, ***kwargs*)

Create new batch prediction job, with a scoring dataset from Azure blob storage and writing the result back to Azure blob storage.

This returns immediately after the job has been created. You must poll for job completion using `get_status()` or `wait_for_completion()` (see `datarobot.models.Job`).

Refer to the `datarobot.models.BatchPredictionJob.score()` method for details on the other *kwargs* parameters.

Returns

BatchPredictionJob Instance of `BatchPredictionJob`

Attributes

deployment [Deployment or string ID] Deployment which will be used for scoring.

source_url [string] The URL for the prediction dataset (e.g.: `https://storage_account.blob.endpoint/container/blob_name`)

destination_url [string] The URL for the scored dataset (e.g.: `https://storage_account.blob.endpoint/container/blob_name`)

credential [string or Credential (optional)] The Azure Credential object or credential id

classmethod score_gcp (*deployment: DeploymentType, source_url: str, destination_url: str, credential=None, **kwargs*)

Create new batch prediction job, with a scoring dataset from Google Cloud Storage and writing the result back to one.

This returns immediately after the job has been created. You must poll for job completion using `get_status()` or `wait_for_completion()` (see `datarobot.models.Job`).

Refer to the `datarobot.models.BatchPredictionJob.score()` method for details on the other *kwargs* parameters.

Returns

BatchPredictionJob Instance of BatchPredictionJob

Attributes

deployment [Deployment or string ID] Deployment which will be used for scoring.

source_url [string] The URL for the prediction dataset (e.g.: `http(s)://storage.googleapis.com/[bucket]/[object]`)

destination_url [string] The URL for the scored dataset (e.g.: `http(s)://storage.googleapis.com/[bucket]/[object]`)

credential [string or Credential (optional)] The GCP Credential object or credential id

classmethod score_from_existing (*batch_prediction_job_id: str*) → `datarobot.models.batch_prediction_job.BatchPredictionJob`

Create a new batch prediction job based on the settings from a previously created one

Returns

BatchPredictionJob Instance of BatchPredictionJob

Attributes

batch_prediction_job_id: str ID of the previous batch prediction job

classmethod score_pandas (*deployment: DeploymentType, df: pd.DataFrame, read_timeout: int = 660, **kwargs*) → `Tuple[BatchPredictionJob, pd.DataFrame]`

Run a batch prediction job, with a scoring dataset from a pandas dataframe. The output from the prediction will be joined to the passed DataFrame and returned.

Use `columnNamesRemapping` to drop or rename columns in the output

This method blocks until the job has completed or raises an exception on errors.

Refer to the `datarobot.models.BatchPredictionJob.score()` method for details on the other *kwargs* parameters.

Returns

BatchPredictionJob Instance of BatchPredictionJob

pandas.DataFrame The original dataframe merged with the predictions

Attributes

deployment [Deployment or string ID] Deployment which will be used for scoring.

df [pandas.DataFrame] The dataframe to score

classmethod get (*batch_prediction_job_id: str*) → datarobot.models.batch_prediction_job.BatchPredictionJob
Get batch prediction job

Returns

BatchPredictionJob Instance of BatchPredictionJob

Attributes

batch_prediction_job_id: str ID of batch prediction job

download (*fileobj, timeout: int = 120, read_timeout: int = 660*) → None
Downloads the CSV result of a prediction job

Attributes

fileobj: file-like object Write CSV data to this file-like object

timeout [int (optional, default 120)] New in version 2.22.

Seconds to wait for the download to become available.

The download will not be available before the job has started processing. In case other jobs are occupying the queue, processing may not start immediately.

If the timeout is reached, the job will be aborted and *RuntimeError* is raised.

Set to -1 to wait infinitely.

read_timeout [int (optional, default 660)] New in version 2.22.

Seconds to wait for the server to respond between chunks.

delete (*ignore_404_errors: bool = False*) → None
Cancel this job. If this job has not finished running, it will be removed and canceled.

get_status ()
Get status of batch prediction job

Returns

BatchPredictionJob status data Dict with job status

classmethod list_by_status (*statuses: Optional[List[str]] = None*) → List[datarobot.models.batch_prediction_job.BatchPredictionJob]
Get jobs collection for specific set of statuses

Returns

BatchPredictionJob statuses List of job statuses dicts with specific statuses

Attributes

statuses List of statuses to filter jobs ([ABORTED|COMPLETED|*...*]) if statuses is not provided, returns all jobs for user

```
class datarobot.models.BatchPredictionJobDefinition (id: Optional[str] = None, name:
Optional[str] = None, enabled:
Optional[bool] = None, sched-
ule: Optional[Schedule] = None,
batch_prediction_job=None,
created: Optional[str] =
None, updated: Optional[str]
= None, created_by=None,
updated_by=None,
last_failed_run_time:
Optional[str] = None,
last_successful_run_time:
Optional[str] = None,
last_started_job_status:
Optional[str] = None,
last_scheduled_run_time:
Optional[str] = None)
```

```
classmethod get (batch_prediction_job_definition_id: str) →
datarobot.models.batch_prediction_job.BatchPredictionJobDefinition
Get batch prediction job definition
```

Returns

BatchPredictionJobDefinition Instance of BatchPredictionJobDefinition

Examples

```
>>> import datarobot as dr
>>> definition = dr.BatchPredictionJobDefinition.get('5a8ac9ab07a57a0001be501f
↪')
>>> definition
BatchPredictionJobDefinition(60912e09fd1f04e832a575c1)
```

Attributes

batch_prediction_job_definition_id: str ID of batch prediction job definition

```
classmethod list () → List[datarobot.models.batch_prediction_job.BatchPredictionJobDefinition]
Get job all definitions
```

Returns

List[BatchPredictionJobDefinition] List of job definitions the user has access to see

Examples

```
>>> import datarobot as dr
>>> definition = dr.BatchPredictionJobDefinition.list()
>>> definition
[
  BatchPredictionJobDefinition(60912e09fd1f04e832a575c1),
  BatchPredictionJobDefinition(6086ba053f3ef731e81af3ca)
]
```

classmethod create (*enabled: bool, batch_prediction_job, name: Optional[str] = None, schedule: Optional[Schedule] = None*) → BatchPredictionJobDefinition
 Creates a new batch prediction job definition to be run either at scheduled interval or as a manual run.

Returns

BatchPredictionJobDefinition Instance of BatchPredictionJobDefinition

Examples

```
>>> import datarobot as dr
>>> job_spec = {
...     "num_concurrent": 4,
...     "deployment_id": "foobar",
...     "intake_settings": {
...         "url": "s3://foobar/123",
...         "type": "s3",
...         "format": "csv"
...     },
...     "output_settings": {
...         "url": "s3://foobar/123",
...         "type": "s3",
...         "format": "csv"
...     },
... }
>>> schedule = {
...     "day_of_week": [
...         1
...     ],
...     "month": [
...         "*"
...     ],
...     "hour": [
...         16
...     ],
...     "minute": [
...         0
...     ],
...     "day_of_month": [
...         1
...     ]
... }
>>> definition = BatchPredictionJobDefinition.create(
...     enabled=False,
...     batch_prediction_job=job_spec,
...     name="some_definition_name",
...     schedule=schedule
... )
>>> definition
BatchPredictionJobDefinition(60912e09fd1f04e832a575c1)
```

Attributes

enabled [bool (default False)] Whether or not the definition should be active on a scheduled basis. If True, *schedule* is required.

batch_prediction_job: dict The job specifications for your batch prediction job. It requires the same job input parameters as used with *score()*, only it will not initialize a job

scoring, only store it as a definition for later use.

name [string (optional)] The name you want your job to be identified with. Must be unique across the organization's existing jobs. If you don't supply a name, a random one will be generated for you.

schedule [dict (optional)] The `schedule` payload defines at what intervals the job should run, which can be combined in various ways to construct complex scheduling terms if needed. In all of the elements in the objects, you can supply either an asterisk ["*"] denoting "every" time denomination or an array of integers (e.g. [1, 2, 3]) to define a specific interval.

The `schedule` payload is split up in the following items:

Minute:

The minute(s) of the day that the job will run. Allowed values are either ["*"] meaning every minute of the day or [0 ... 59]

Hour: The hour(s) of the day that the job will run. Allowed values are either ["*"] meaning every hour of the day or [0 ... 23].

Day of Month: The date(s) of the month that the job will run. Allowed values are either [1 ... 31] or ["*"] for all days of the month. This field is additive with `dayOfWeek`, meaning the job will run both on the date(s) defined in this field and the day specified by `dayOfWeek` (for example, dates 1st, 2nd, 3rd, plus every Tuesday). If `dayOfMonth` is set to ["*"] and `dayOfWeek` is defined, the scheduler will trigger on every day of the month that matches `dayOfWeek` (for example, Tuesday the 2nd, 9th, 16th, 23rd, 30th). Invalid dates such as February 31st are ignored.

Month: The month(s) of the year that the job will run. Allowed values are either [1 ... 12] or ["*"] for all months of the year. Strings, either 3-letter abbreviations or the full name of the month, can be used interchangeably (e.g., "jan" or "October"). Months that are not compatible with `dayOfMonth` are ignored, for example {"dayOfMonth": [31], "month": ["feb"]}

Day of Week: The day(s) of the week that the job will run. Allowed values are [0 ... 6], where (Sunday=0), or ["*"], for all days of the week. Strings, either 3-letter abbreviations or the full name of the day, can be used interchangeably (e.g., "sunday", "Sunday", "Sun", all map to [0]). This field is additive with `dayOfMonth`, meaning the job will run both on the date specified by `dayOfMonth` and the day defined in this field.

update (*enabled: bool, batch_prediction_job=None, name: Optional[str] = None, schedule: Optional[Schedule] = None*) → `BatchPredictionJobDefinition`
Updates a job definition with the changed specs.

Takes the same input as `create()`

Returns

BatchPredictionJobDefinition Instance of the updated `BatchPredictionJobDefinition`

Examples

```
>>> import datarobot as dr
>>> job_spec = {
...     "num_concurrent": 5,
...     "deployment_id": "foobar_new",
```

(continues on next page)

(continued from previous page)

```

...     "intake_settings": {
...         "url": "s3://foobar/123",
...         "type": "s3",
...         "format": "csv"
...     },
...     "output_settings": {
...         "url": "s3://foobar/123",
...         "type": "s3",
...         "format": "csv"
...     },
... }
>>> schedule = {
...     "day_of_week": [
...         1
...     ],
...     "month": [
...         "*"
...     ],
...     "hour": [
...         "*"
...     ],
...     "minute": [
...         30, 59
...     ],
...     "day_of_month": [
...         1, 2, 6
...     ]
... }
>>> definition = BatchPredictionJobDefinition.create(
...     enabled=False,
...     batch_prediction_job=job_spec,
...     name="updated_definition_name",
...     schedule=schedule
... )
>>> definition
BatchPredictionJobDefinition(60912e09fd1f04e832a575c1)

```

Attributes

enabled [bool (default False)] Same as `enabled` in `create()`.

batch_prediction_job: dict Same as `batch_prediction_job` in `create()`.

name [string (optional)] Same as `name` in `create()`.

schedule [dict] Same as `schedule` in `create()`.

run_on_schedule (`schedule: Schedule`) → `BatchPredictionJobDefinition`

Sets the run schedule of an already created job definition.

If the job was previously not enabled, this will also set the job to enabled.

Returns

BatchPredictionJobDefinition Instance of the updated `BatchPredictionJobDefinition` with the new / updated schedule.

Examples

```
>>> import datarobot as dr
>>> definition = dr.BatchPredictionJobDefinition.create('...')
>>> schedule = {
...     "day_of_week": [
...         1
...     ],
...     "month": [
...         "*"
...     ],
...     "hour": [
...         "*"
...     ],
...     "minute": [
...         30, 59
...     ],
...     "day_of_month": [
...         1, 2, 6
...     ]
... }
>>> definition.run_on_schedule(schedule)
BatchPredictionJobDefinition(60912e09fd1f04e832a575c1)
```

Attributes

schedule [dict] Same as `schedule` in `create()`.

run_once() → `datarobot.models.batch_prediction_job.BatchPredictionJob`

Manually submits a batch prediction job to the queue, based off of an already created job definition.

Returns

BatchPredictionJob Instance of `BatchPredictionJob`

Examples

```
>>> import datarobot as dr
>>> definition = dr.BatchPredictionJobDefinition.create('...')
>>> job = definition.run_once()
>>> job.wait_for_completion()
```

delete() → None

Deletes the job definition and disables any future schedules of this job if any. If a scheduled job is currently running, this will not be cancelled.

Examples

```
>>> import datarobot as dr
>>> definition = dr.BatchPredictionJobDefinition.get('5a8ac9ab07a57a0001be501f
↪')
>>> definition.delete()
```

2.3.4 Blueprint

```
class datarobot.models.Blueprint (id: Optional[str] = None, processes: Optional[List[str]] = None, model_type: Optional[str] = None, project_id: Optional[str] = None, blueprint_category: Optional[str] = None, monotonic_increasing_featurelist_id: Optional[str] = None, monotonic_decreasing_featurelist_id: Optional[str] = None, supports_monotonic_constraints: Optional[bool] = None, recommended_featurelist_id: Optional[str] = None, supports_composable_ml: Optional[bool] = None)
```

A Blueprint which can be used to fit models

Attributes

id [str] the id of the blueprint

processes [list of str] the processes used by the blueprint

model_type [str] the model produced by the blueprint

project_id [str] the project the blueprint belongs to

blueprint_category [str] (New in version v2.6) Describes the category of the blueprint and the kind of model it produces.

recommended_featurelist_id: str or null (New in v2.18) The ID of the feature list recommended for this blueprint. If this field is not present, then there is no recommended feature list.

supports_composable_ml [bool or None] (New in version v2.26) whether this blueprint is supported in the Composable ML.

classmethod **get** (*project_id: str, blueprint_id: str*) → datarobot.models.blueprint.Blueprint
Retrieve a blueprint.

Parameters

project_id [str] The project's id.

blueprint_id [str] Id of blueprint to retrieve.

Returns

blueprint [Blueprint] The queried blueprint.

get_chart () → datarobot.models.blueprint.BlueprintChart
Retrieve a chart.

Returns

BlueprintChart The current blueprint chart.

get_documents () → List[datarobot.models.blueprint.BlueprintTaskDocument]
Get documentation for tasks used in the blueprint.

Returns

list of BlueprintTaskDocument All documents available for blueprint.

classmethod **from_data** (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T
Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

classmethod `from_server_data` (*data: Union[Dict[str, Any], List[Dict[str, Any]]], keep_attrs: Optional[Iterable[str]] = None*) → T

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

class `datarobot.models.BlueprintTaskDocument` (*title: Optional[str] = None, task: Optional[str] = None, description: Optional[str] = None, parameters: Optional[List[ParameterType]] = None, links: Optional[List[LinkType]] = None, references: Optional[List[ReferenceType]] = None*)

Document describing a task from a blueprint.

Attributes

title [str] Title of document.

task [str] Name of the task described in document.

description [str] Task description.

parameters [list of dict(name, type, description)] Parameters that task can receive in human-readable format.

links [list of dict(name, url)] External links used in document

references [list of dict(name, url)] References used in document. When no link available url equals None.

class `datarobot.models.BlueprintChart` (*nodes: List[Dict[str, str]], edges: List[Tuple[str, str]]*)

A Blueprint chart that can be used to understand data flow in blueprint.

Attributes

nodes [list of dict (id, label)] Chart nodes, id unique in chart.

edges [list of tuple (id1, id2)] Directions of data flow between blueprint chart nodes.

classmethod `get` (*project_id: str, blueprint_id: str*) → `datarobot.models.blueprint.BlueprintChart`
Retrieve a blueprint chart.

Parameters

project_id [str] The project's id.

blueprint_id [str] Id of blueprint to retrieve chart.

Returns

BlueprintChart The queried blueprint chart.

to_graphviz () → str

Get blueprint chart in graphviz DOT format.

Returns

unicode String representation of chart in graphviz DOT language.

```
class datarobot.models.ModelBlueprintChart (nodes: List[Dict[str, str]], edges: List[Tuple[str, str]])
```

A Blueprint chart that can be used to understand data flow in model. Model blueprint chart represents reduced repository blueprint chart with only elements that used to build this particular model.

Attributes

nodes [list of dict (id, label)] Chart nodes, id unique in chart.

edges [list of tuple (id1, id2)] Directions of data flow between blueprint chart nodes.

```
classmethod get (project_id: str, model_id: str) → datarobot.models.blueprint.ModelBlueprintChart
```

Retrieve a model blueprint chart.

Parameters

project_id [str] The project's id.

model_id [str] Id of model to retrieve model blueprint chart.

Returns

ModelBlueprintChart The queried model blueprint chart.

```
to_graphviz () → str
```

Get blueprint chart in graphviz DOT format.

Returns

unicode String representation of chart in graphviz DOT language.

2.3.5 Calendar File

```
class datarobot.CalendarFile (calendar_end_date: Optional[str] = None, calendar_start_date: Optional[str] = None, created: Optional[str] = None, id: Optional[str] = None, name: Optional[str] = None, num_event_types: Optional[int] = None, num_events: Optional[int] = None, project_ids: Optional[List[str]] = None, role: Optional[str] = None, multiseries_id_columns: Optional[List[str]] = None)
```

Represents the data for a calendar file.

For more information about calendar files, see the [calendar documentation](#).

Attributes

id [str] The id of the calendar file.

calendar_start_date [str] The earliest date in the calendar.

calendar_end_date [str] The last date in the calendar.

created [str] The date this calendar was created, i.e. uploaded to DR.

name [str] The name of the calendar.

num_event_types [int] The number of different event types.

num_events [int] The number of events this calendar has.

project_ids [list of strings] A list containing the projectIds of the projects using this calendar.

multiseries_id_columns: list of str or None A list of columns in calendar which uniquely identify events for different series. Currently, only one column is supported. If multiseries id columns are not provided, calendar is considered to be single series.

role [str] The access role the user has for this calendar.

```
classmethod create (file_path: str, calendar_name: Optional[str] = None,
                    multiseries_id_columns: Optional[List[str]] = None) →
                    datarobot.models.calendar_file.CalendarFile
```

Creates a calendar using the given file. For information about calendar files, see the [calendar documentation](#)

The provided file must be a CSV in the format:

```
Date, Event, Series ID, Event Duration
<date>, <event_type>, <series id>, <event duration>
<date>, <event_type>, , <event duration>
```

A header row is required, and the `Series ID` and `Event Duration` columns are optional.

Once the `CalendarFile` has been created, pass its ID with the `DatetimePartitioningSpecification` when setting the target for a time series project in order to use it.

Parameters

file_path [string] A string representing a path to a local csv file.

calendar_name [string, optional] A name to assign to the calendar. Defaults to the name of the file if not provided.

multiseries_id_columns [list of str or None] A list of the names of multiseries id columns to define which series an event belongs to. Currently only one multiseries id column is supported.

Returns

calendar_file [CalendarFile] Instance with initialized data.

Raises

AsyncProcessUnsuccessfulError Raised if there was an error processing the provided calendar file.

Examples

```
# Creating a calendar with a specified name
cal = dr.CalendarFile.create('/home/calendars/somecalendar.csv',
                             calendar_name='Some Calendar Name')
cal.id
>>> 5c1d4904211c0a061bc93013
cal.name
>>> Some Calendar Name

# Creating a calendar without specifying a name
cal = dr.CalendarFile.create('/home/calendars/somecalendar.csv')
cal.id
>>> 5c1d4904211c0a061bc93012
cal.name
>>> somecalendar.csv

# Creating a calendar with multiseries id columns
cal = dr.CalendarFile.create('/home/calendars/somemultiseriescalendar.csv',
                             calendar_name='Some Multiseries Calendar Name',
```

(continues on next page)

(continued from previous page)

```

                                multiseries_id_columns=['series_id'])
cal.id
>>> 5da9bb21962d746f97e4daee
cal.name
>>> Some Multiseries Calendar Name
cal.multiseries_id_columns
>>> ['series_id']

```

classmethod create_calendar_from_dataset (*dataset_id*: str, *dataset_version_id*: Optional[str] = None, *calendar_name*: Optional[str] = None, *multiseries_id_columns*: Optional[List[str]] = None, *delete_on_error*: Optional[bool] = False) → datarobot.models.calendar_file.CalendarFile

Creates a calendar using the given dataset. For information about calendar files, see the [calendar documentation](#)

The provided dataset have the following format:

```

Date,      Event,      Series ID,      Event Duration
<date>, <event_type>, <series id>, <event duration>
<date>, <event_type>,      , <event duration>

```

The `Series ID` and `Event Duration` columns are optional.

Once the `CalendarFile` has been created, pass its ID with the `DatetimePartitioningSpecification` when setting the target for a time series project in order to use it.

Parameters

- dataset_id** [string] The identifier of the dataset from which to create the calendar.
- dataset_version_id** [string, optional] The identifier of the dataset version from which to create the calendar.
- calendar_name** [string, optional] A name to assign to the calendar. Defaults to the name of the dataset if not provided.
- multiseries_id_columns** [list of str, optional] A list of the names of multiseries id columns to define which series an event belongs to. Currently only one multiseries id column is supported.
- delete_on_error** [boolean, optional] Whether delete calendar file from Catalog if it's not valid.

Returns

- calendar_file** [CalendarFile] Instance with initialized data.

Raises

- AsyncProcessUnsuccessfulError** Raised if there was an error processing the provided calendar file.

Examples

```
# Creating a calendar from a dataset
dataset = dr.Dataset.create_from_file('/home/calendars/somecalendar.csv')
cal = dr.CalendarFile.create_calendar_from_dataset(
    dataset.id, calendar_name='Some Calendar Name'
)
cal.id
>>> 5c1d4904211c0a061bc93013
cal.name
>>> Some Calendar Name

# Creating a calendar from a new dataset version
new_dataset_version = dr.Dataset.create_version_from_file(
    dataset.id, '/home/calendars/anothercalendar.csv'
)
cal = dr.CalendarFile.create(
    new_dataset_version.id, dataset_version_id=new_dataset_version.version_id
)
cal.id
>>> 5c1d4904211c0a061bc93012
cal.name
>>> anothercalendar.csv
```

classmethod `create_calendar_from_country_code` (*country_code*: str, *start_date*: datetime.datetime, *end_date*: datetime.datetime) → datarobot.models.calendar_file.CalendarFile

Generates a calendar based on the provided country code and dataset start date and end dates. The provided country code should be uppercase and 2-3 characters long. See [CalendarFile.get_allowed_country_codes](#) for a list of allowed country codes.

Parameters

- country_code** [string] The country code for the country to use for generating the calendar.
- start_date** [datetime.datetime] The earliest date to include in the generated calendar.
- end_date** [datetime.datetime] The latest date to include in the generated calendar.

Returns

calendar_file [CalendarFile] Instance with initialized data.

classmethod `get_allowed_country_codes` (*offset*: Optional[int] = None, *limit*: Optional[int] = None) → List[CountryCode]

Retrieves the list of allowed country codes that can be used for generating the preloaded calendars.

Parameters

- offset** [int] Optional, defaults to 0. This many results will be skipped.
- limit** [int] Optional, defaults to 100, maximum 1000. At most this many results are returned.

Returns

list A list of dicts, each of which represents an allowed country code. Each item has the following structure:

- **name** : (str) The name of the country.
- **code** : (str) The code for this country. This is the value that should be supplied to [CalendarFile.create_calendar_from_country_code](#).

classmethod `get` (*calendar_id: str*) → `datarobot.models.calendar_file.CalendarFile`
Gets the details of a calendar, given the id.

Parameters

calendar_id [str] The identifier of the calendar.

Returns

calendar_file [CalendarFile] The requested calendar.

Raises

DataError Raised if the `calendar_id` is invalid, i.e. the specified `CalendarFile` does not exist.

Examples

```
cal = dr.CalendarFile.get(some_calendar_id)
cal.id
>>> some_calendar_id
```

classmethod `list` (*project_id: Optional[str] = None, batch_size: Optional[int] = None*) → `List[datarobot.models.calendar_file.CalendarFile]`
Gets the details of all calendars this user has view access for.

Parameters

project_id [str, optional] If provided, will filter for calendars associated only with the specified project.

batch_size [int, optional] The number of calendars to retrieve in a single API call. If specified, the client may make multiple calls to retrieve the full list of calendars. If not specified, an appropriate default will be chosen by the server.

Returns

calendar_list [list of *CalendarFile*] A list of `CalendarFile` objects.

Examples

```
calendars = dr.CalendarFile.list()
len(calendars)
>>> 10
```

classmethod `delete` (*calendar_id: str*) → `None`
Deletes the calendar specified by `calendar_id`.

Parameters

calendar_id [str] The id of the calendar to delete. The requester must have OWNER access for this calendar.

Raises

ClientError Raised if an invalid `calendar_id` is provided.

Examples

```
# Deleting with a valid calendar_id
status_code = dr.CalendarFile.delete(some_calendar_id)
status_code
>>> 204
dr.CalendarFile.get(some_calendar_id)
>>> ClientError: Item not found
```

classmethod `update_name` (*calendar_id: str, new_calendar_name: str*) → int

Changes the name of the specified calendar to the specified name. The requester must have at least READ_WRITE permissions on the calendar.

Parameters

calendar_id [str] The id of the calendar to update.

new_calendar_name [str] The new name to set for the specified calendar.

Returns

status_code [int] 200 for success

Raises

ClientError Raised if an invalid `calendar_id` is provided.

Examples

```
response = dr.CalendarFile.update_name(some_calendar_id, some_new_name)
response
>>> 200
cal = dr.CalendarFile.get(some_calendar_id)
cal.name
>>> some_new_name
```

classmethod `share` (*calendar_id: str, access_list: List[datarobot.models.sharing.SharingAccess]*)
→ int

Shares the calendar with the specified users, assigning the specified roles.

Parameters

calendar_id [str] The id of the calendar to update

access_list: A list of `dr.SharingAccess` objects. Specify *None* for the role to delete a user's access from the specified `CalendarFile`. For more information on specific access levels, see the [sharing](#) documentation.

Returns

status_code [int] 200 for success

Raises

ClientError Raised if unable to update permissions for a user.

AssertionError Raised if `access_list` is invalid.

Examples

```
# assuming some_user is a valid user, share this calendar with some_user
sharing_list = [dr.SharingAccess(some_user_username,
                                dr.enums.SHARING_ROLE.READ_WRITE)]
response = dr.CalendarFile.share(some_calendar_id, sharing_list)
response.status_code
>>> 200

# delete some_user from this calendar, assuming they have access of some kind_
↪already
delete_sharing_list = [dr.SharingAccess(some_user_username,
                                        None)]
response = dr.CalendarFile.share(some_calendar_id, delete_sharing_list)
response.status_code
>>> 200

# Attempt to add an invalid user to a calendar
invalid_sharing_list = [dr.SharingAccess(invalid_username,
                                         dr.enums.SHARING_ROLE.READ_WRITE)]
dr.CalendarFile.share(some_calendar_id, invalid_sharing_list)
>>> ClientError: Unable to update access for this calendar
```

classmethod `get_access_list` (*calendar_id*: str, *batch_size*: Optional[int] = None) → List[datarobot.models.sharing.SharingAccess]

Retrieve a list of users that have access to this calendar.

Parameters

calendar_id [str] The id of the calendar to retrieve the access list for.

batch_size [int, optional] The number of access records to retrieve in a single API call. If specified, the client may make multiple calls to retrieve the full list of calendars. If not specified, an appropriate default will be chosen by the server.

Returns

access_control_list [list of *SharingAccess*] A list of *SharingAccess* objects.

Raises

ClientError Raised if user does not have access to calendar or calendar does not exist.

2.3.6 Automated Documentation

```
class datarobot.models.automated_documentation.AutomatedDocument (entity_id=None,
                                                                    docu-
                                                                    ment_type=None,
                                                                    out-
                                                                    put_format=None,
                                                                    lo-
                                                                    cale=None,
                                                                    tem-
                                                                    plate_id=None,
                                                                    id=None,
                                                                    filepath=None,
                                                                    cre-
                                                                    ated_at=None)
```

An *automated documentation* object.

New in version v2.24.

Attributes

document_type [str or None] Type of automated document. You can specify: MODEL_COMPLIANCE, AUTOPILOT_SUMMARY depending on your account settings. Required for document generation.

entity_id [str or None] ID of the entity to generate the document for. It can be model ID or project ID. Required for document generation.

output_format [str or None] Format of the generate document, either docx or html. Required for document generation.

locale [str or None] Localization of the document, dependent on your account settings. Default setting is EN_US.

template_id [str or None] Template ID to use for the document outline. Defaults to standard DataRobot template. See the documentation for *ComplianceDocTemplate* for more information.

id [str or None] ID of the document. Required to download or delete a document.

filepath [str or None] Path to save a downloaded document to. Either include a file path and name or the file will be saved to the directory from which the script is launched.

created_at [datetime or None] Document creation timestamp.

classmethod `list_available_document_types()`

Get a list of all available document types and locales.

Returns

List of dicts

Examples

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)
doc_types = dr.AutomatedDocument.list_available_document_types()
```

is_model_compliance_initialized

Check if model compliance documentation pre-processing is initialized. Model compliance documentation pre-processing must be initialized before generating documentation for a custom model.

Returns**Tuple of (boolean, string)**

- *boolean* flag is whether model compliance documentation pre-processing is initialized
- *string* value is the initialization status

initialize_model_compliance()

Initialize model compliance documentation pre-processing. Must be called before generating documentation for a custom model.

Returns**Tuple of (boolean, string)**

- *boolean* flag is whether model compliance documentation pre-processing is initialized
- *string* value is the initialization status

Examples

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)

# NOTE: entity_id is either a model id or a model package id
doc = dr.AutomatedDocument(
    document_type="MODEL_COMPLIANCE",
    entity_id="6f50cdb77cc4f8d1560c3ed5",
    output_format="docx",
    locale="EN_US")

doc.initialize_model_compliance()
```

generate (*max_wait: int = 600*) → requests.models.Response

Request generation of an automated document.

Required attributes to request document generation: `document_type`, `entity_id`, and `output_format`.

Returns**requests.models.Response****Examples**

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)

doc = dr.AutomatedDocument(
    document_type="MODEL_COMPLIANCE",
    entity_id="6f50cdb77cc4f8d1560c3ed5",
    output_format="docx",
```

(continues on next page)

(continued from previous page)

```

        locale="EN_US",
        template_id="50efc9db8aff6c81a374aeec",
        filepath="/Users/username/Documents/example.docx"
    )

doc.generate()
doc.download()

```

download()

Download a generated Automated Document. Document ID is required to download a file.

Returns

requests.models.Response

Examples

Generating and downloading the generated document:

```

import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)

doc = dr.AutomatedDocument(
    document_type="AUTOPILOT_SUMMARY",
    entity_id="6050d07d9da9053ebb002ef7",
    output_format="docx",
    filepath="/Users/username/Documents/Project_Report_1.docx"
)

doc.generate()
doc.download()

```

Downloading an earlier generated document when you know the document ID:

```

import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)
doc = dr.AutomatedDocument(id='5e8b6a34d2426053ab9a39ed')
doc.download()

```

Notice that `filepath` was not set for this document. In this case, the file is saved to the directory from which the script was launched.

Downloading a document chosen from a list of earlier generated documents:

```

import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)

model_id = "6f5ed3de855962e0a72a96fe"
docs = dr.AutomatedDocument.list_generated_documents(entity_ids=[model_id])
doc = docs[0]
doc.filepath = "/Users/me/Desktop/Recommended_model_doc.docx"
doc.download()

```

delete()

Delete a document using its ID.

Returns

requests.models.Response

Examples

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)
doc = dr.AutomatedDocument(id="5e8b6a34d2426053ab9a39ed")
doc.delete()
```

If you don't know the document ID, you can follow the same workflow to get the ID as in the examples for the `AutomatedDocument.download` method.

classmethod list_generated_documents (*document_types=None, entity_ids=None, output_formats=None, locales=None, offset=None, limit=None*)

Get information about all previously generated documents available for your account. The information includes document ID and type, ID of the entity it was generated for, time of creation, and other information.

Parameters

document_types [List of str or None] Query for one or more document types.

entity_ids [List of str or None] Query generated documents by one or more entity IDs.

output_formats [List of str or None] Query for one or more output formats.

locales [List of str or None] Query generated documents by one or more locales.

offset: int or None Number of items to skip. Defaults to 0 if not provided.

limit: int or None Number of items to return, maximum number of items is 1000.

Returns

List of `AutomatedDocument` objects, where each object contains attributes described in

AutomatedDocument

Examples

To get a list of all generated documents:

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)
docs = AutomatedDocument.list_generated_documents()
```

To get a list of all AUTOPILOT_SUMMARY documents:

```
import datarobot as dr

dr.Client(token=my_token, endpoint=endpoint)
docs = AutomatedDocument.list_generated_documents(document_types=["AUTOPILOT_
↪SUMMARY"])
```

(continues on next page)

max_unaggregated_class_values [int, optional] Maximum amount of unique values allowed before aggregation kicks in.

min_class_support [int, optional] Minimum number of instances necessary for each target value in the dataset. All values with less instances will be aggregated.

excluded_from_aggregation [list, optional] List of target values that should be guaranteed to kept as is, regardless of other settings.

aggregation_class_name [str, optional] If some of the values will be aggregated - this is the name of the aggregation class that will replace them.

2.3.8 Client Configuration

`datarobot.client.Client` (*token: Optional[str] = None, endpoint: Optional[str] = None, config_path: Optional[str] = None, connect_timeout: Optional[int] = None, user_agent_suffix: Optional[str] = None, ssl_verify: bool = True, max_retries: Union[int, urllib3.util.retry.Retry, None] = None, token_type: str = 'Token'*) → `datarobot.rest.RESTClientObject`

Configures the global API client for the Python SDK with optional configuration. Missing configuration will be read from env or config file.

Parameters

token [str, optional] API token

endpoint [str, optional] Base url of API

config_path [str, optional] Alternate location of config file

connect_timeout [int, optional] How long the client should be willing to wait before establishing a connection with the server.

user_agent_suffix [str, optional] Additional text that is appended to the User-Agent HTTP header when communicating with the DataRobot REST API. This can be useful for identifying different applications that are built on top of the DataRobot Python Client, which can aid debugging and help track usage.

ssl_verify [bool or str, optional] Whether to check SSL certificate. Could be set to path with certificates of trusted certification authorities.

max_retries [int or `datarobot.rest.Retry`, optional] Either an integer number of times to retry connection errors, or a `urllib3.util.retry.Retry` object to configure retries.

token_type: str, 'Token' by default Authentication token type: `Token`, `Bearer`. `Bearer` is for DataRobot OAuth2 token, `Token` for token generated in Developer Tools.

Returns

The `RESTClientObject` instance created.

`datarobot.client.set_client` (*client: datarobot.rest.RESTClientObject*) → `Optional[datarobot.rest.RESTClientObject]`
Configure the global HTTP client for the Python SDK. Returns previous instance.

`datarobot.client.client_configuration` (**args, **kwargs*)

This context manager can be used to temporarily change the global HTTP client.

In multithreaded scenarios, it is highly recommended to use a fresh manager object per thread.

DataRobot does not recommend nesting these contexts.

Parameters

args [Parameters passed to `datarobot.client.Client()`]

kwargs [Keyword arguments passed to `datarobot.Client()`]

Examples

```
from datarobot.client import client_configuration
from datarobot.models import Project

with client_configuration(token="api-key-here", endpoint="https://host-name.com"):
    Project.list()
```

```
from datarobot.client import Client, client_configuration
from datarobot.models import Project

Client() # Interact with DataRobot using the default configuration.
Project.list()

with client_configuration(config_path="/path/to/a/drconfig.yaml"):
    # Interact with DataRobot using a different configuration.
    Project.list()
```

```
class datarobot.rest.RESTClientObject (auth: str, endpoint: str, connect_timeout:
Optional[int] = 6.05, verify: bool = True,
user_agent_suffix: Optional[str] = None,
max_retries: Union[int, urllib3.util.retry.Retry,
None] = None, authentication_type: Optional[str] =
None)
```

Parameters

connect_timeout timeout for http request and connection

headers headers for outgoing requests

open_in_browser () → None

Opens the DataRobot app in a web browser, or logs the URL if a browser is not available.

2.3.9 Clustering

```
class datarobot.models.ClusteringModel (id=None, processes=None, featurer_name=None,
featurer_id=None, project_id=None, sam-
ple_pct=None, training_row_count=None, train-
ing_duration=None, training_start_date=None,
training_end_date=None, model_type=None,
model_category=None, is_frozen=None,
is_n_clusters_dynamically_determined=None,
blueprint_id=None, metrics=None, project=None,
monotonic_increasing_featurer_id=None,
monotonic_decreasing_featurer_id=None,
n_clusters=None, has_empty_clusters=None,
supports_monotonic_constraints=None,
is_starred=None, prediction_threshold=None,
prediction_threshold_read_only=None,
model_number=None, parent_model_id=None,
use_project_settings=None, sup-
ports_composable_ml=None)
```

ClusteringModel extends *Model* class. It provides provides properties and methods specific to clustering projects.

compute_insights (*max_wait: int = 600*) → List[datarobot.models.cluster_insight.ClusterInsight]

Compute and retrieve cluster insights for model. This method awaits completion of job computing cluster insights and returns results after it is finished. If computation takes longer than specified *max_wait* exception will be raised.

Parameters

project_id: str Project to start creation in.

model_id: str Project's model to start creation in.

max_wait: int Maximum number of seconds to wait before giving up

Returns

List of ClusterInsight

Raises

ClientError Server rejected creation due to client error. Most likely cause is bad *project_id* or *model_id*.

AsyncFailureError If any of the responses from the server are unexpected

AsyncProcessUnsuccessfulError If the cluster insights computation has failed or was cancelled.

AsyncTimeoutError If the cluster insights computation did not resolve in time

insights

Return actual list of cluster insights if already computed.

Returns

List of ClusterInsight

clusters

Return actual list of Clusters.

Returns

List of Cluster

update_cluster_names (*cluster_name_mappings*: *List[Tuple[str, str]]*) →
List[datarobot.models.cluster.Cluster]

Change many cluster names at once based on list of name mappings.

Parameters

cluster_name_mappings: **List of tuples** Cluster names mapping consisting of current cluster name and old cluster name. Example:

```
cluster_name_mappings = [  
    ("current cluster name 1", "new cluster name 1"),  
    ("current cluster name 2", "new cluster name 2")]
```

Returns**List of Cluster****Raises**

datarobot.errors.ClientError Server rejected update of cluster names. Possible reasons include: incorrect format of mapping, mapping introduces duplicates.

update_cluster_name (*current_name*: *str*, *new_name*: *str*) →
List[datarobot.models.cluster.Cluster]

Change cluster name from *current_name* to *new_name*.

Parameters

current_name: **str** Current cluster name.

new_name: **str** New cluster name.

Returns**List of Cluster****Raises**

datarobot.errors.ClientError Server rejected update of cluster names.

class datarobot.models.cluster.**Cluster** (***kwargs*)

Representation of a single cluster.

Attributes

name: **str** Current cluster name

percent: **float** Percent of data contained in the cluster. This value is reported after cluster insights are computed for the model.

classmethod **list** (*project_id*: *str*, *model_id*: *str*) → List[datarobot.models.cluster.Cluster]

Retrieve a list of clusters in the model.

Parameters

project_id: **str** ID of the project that the model is part of.

model_id: **str** ID of the model.

Returns**List of clusters**

```
classmethod update_multiple_names (project_id: str, model_id: str, cluster_name_mappings: List[Tuple[str, str]]) → List[datarobot.models.cluster.Cluster]
```

Update many clusters at once based on list of name mappings.

Parameters

project_id: str ID of the project that the model is part of.

model_id: str ID of the model.

cluster_name_mappings: List of tuples Cluster name mappings, consisting of current and previous names for each cluster. Example:

```
cluster_name_mappings = [
    ("current cluster name 1", "new cluster name 1"),
    ("current cluster name 2", "new cluster name 2")]
```

Returns

List of clusters

Raises

datarobot.errors.ClientError Server rejected update of cluster names.

ValueError Invalid cluster name mapping provided.

```
classmethod update_name (project_id: str, model_id: str, current_name: str, new_name: str) → List[datarobot.models.cluster.Cluster]
```

Change cluster name from `current_name` to `new_name`

Parameters

project_id: str ID of the project that the model is part of.

model_id: str ID of the model.

current_name: str Current cluster name

new_name: str New cluster name

Returns

List of Cluster

```
class datarobot.models.cluster_insight.ClusterInsight (**kwargs)
```

Holds data on all insights related to feature as well as breakdown per cluster.

Parameters

feature_name: str Name of a feature from the dataset.

feature_type: str Type of feature.

insights [List of classes (ClusterInsight)] List provides information regarding the importance of a specific feature in relation to each cluster. Results help understand how the model is grouping data and what each cluster represents.

feature_impact: float Impact of a feature ranging from 0 to 1.

```
classmethod compute (project_id: str, model_id: str, max_wait: int = 600) → List[datarobot.models.cluster_insight.ClusterInsight]
```

Starts creation of cluster insights for the model and if successful, returns computed ClusterInsights. This method allows calculation to continue for a specified time and if not complete, cancels the request.

Parameters

project_id: str ID of the project to begin creation of cluster insights for.
model_id: str ID of the project model to begin creation of cluster insights for.
max_wait: int Maximum number of seconds to wait canceling the request.

Returns

List[ClusterInsight]

Raises

ClientError Server rejected creation due to client error. Most likely cause is bad `project_id` or `model_id`.

AsyncFailureError Indicates whether any of the responses from the server are unexpected.

AsyncProcessUnsuccessfulError Indicates whether the cluster insights computation failed or was cancelled.

AsyncTimeoutError Indicates whether the cluster insights computation did not resolve within the specified time limit (`max_wait`).

2.3.10 Compliance Documentation Templates

```
class datarobot.models.compliance_doc_template.ComplianceDocTemplate (id, creator_id, creator_username, name, org_id=None, sections=None)
```

A *compliance documentation template*. Templates are used to customize contents of *AutomatedDocument*.

New in version v2.14.

Notes

Each section dictionary has the following schema:

- `title`: title of the section
- `type`: type of section. Must be one of `datarobot`, `User` or `table_of_contents`.

Each type of section has a different set of attributes described bellow.

Section of type `"datarobot"` represent a section owned by DataRobot. DataRobot sections have the following additional attributes:

- `content_id`: The identifier of the content in this section. You can get the default template with `get_default` for a complete list of possible DataRobot section content ids.
- `sections`: list of sub-section dicts nested under the parent section.

Section of type `"user"` represent a section with user-defined content. Those sections may contain text generated by user and have the following additional fields:

- `regularText`: regular text of the section, optionally separated by `\n` to split paragraphs.
- `highlightedText`: highlighted text of the section, optionally separated by `\n` to split paragraphs.
- `sections`: list of sub-section dicts nested under the parent section.

Section of type "table_of_contents" represent a table of contents and has no additional attributes.

Attributes

id [str] the id of the template

name [str] the name of the template.

creator_id [str] the id of the user who created the template

creator_username [str] username of the user who created the template

org_id [str] the id of the organization the template belongs to

sections [list of dicts] the sections of the template describing the structure of the document.
Section schema is described in Notes section above.

classmethod `get_default` (*template_type=None*)

Get a default DataRobot template. This template is used for generating compliance documentation when no template is specified.

Parameters

template_type [str or None] Type of the template. Currently supported values are "normal" and "time_series"

Returns

template [ComplianceDocTemplate] the default template object with `sections` attribute populated with default sections.

classmethod `create_from_json_file` (*name, path*)

Create a template with the specified name and sections in a JSON file.

This is useful when working with sections in a JSON file. Example:

```
default_template = ComplianceDocTemplate.get_default()
default_template.sections_to_json_file('path/to/example.json')
# ... edit example.json in your editor
my_template = ComplianceDocTemplate.create_from_json_file(
    name='my template',
    path='path/to/example.json'
)
```

Parameters

name [str] the name of the template. Must be unique for your user.

path [str] the path to find the JSON file at

Returns

template [ComplianceDocTemplate] the created template

classmethod `create` (*name, sections*)

Create a template with the specified name and sections.

Parameters

name [str] the name of the template. Must be unique for your user.

sections [list] list of section objects

Returns

template [ComplianceDocTemplate] the created template

classmethod `get (template_id)`

Retrieve a specific template.

Parameters

template_id [str] the id of the template to retrieve

Returns

template [ComplianceDocTemplate] the retrieved template

classmethod `list (name_part=None, limit=None, offset=None)`

Get a paginated list of compliance documentation template objects.

Parameters

name_part [str or None] Return only the templates with names matching specified string. The matching is case-insensitive.

limit [int] The number of records to return. The server will use a (possibly finite) default if not specified.

offset [int] The number of records to skip.

Returns

templates [list of ComplianceDocTemplate] the list of template objects

sections_to_json_file (path, indent=2)

Save sections of the template to a json file at the specified path

Parameters

path [str] the path to save the file to

indent [int] indentation to use in the json file.

update (name=None, sections=None)

Update the name or sections of an existing doc template.

Note that default or non-existent templates can not be updated.

Parameters

name [str, optional] the new name for the template

sections [list of dicts] list of sections

delete ()

Delete the compliance documentation template.

2.3.11 Confusion Chart

class `datarobot.models.confusion_chart.ConfusionChart (source, data, source_model_id)`

Confusion Chart data for model.

Notes

`ClassMetrics` is a dict containing the following:

- `class_name` (string) name of the class
- `actual_count` (int) number of times this class is seen in the validation data

- `predicted_count` (int) number of times this class has been predicted for the validation data
- `f1` (float) F1 score
- `recall` (float) recall score
- `precision` (float) precision score
- **`was_actual_percentages` (list of dict) one vs all actual percentages in format specified below.**
 - `other_class_name` (string) the name of the other class
 - `percentage` (float) the percentage of the times this class was predicted when is was actually class (from 0 to 1)
- **`was_predicted_percentages` (list of dict) one vs all predicted percentages in format specified below.**
 - `other_class_name` (string) the name of the other class
 - `percentage` (float) the percentage of the times this class was actual predicted (from 0 to 1)
- **`confusion_matrix_one_vs_all` (list of list) 2d list representing 2x2 one vs all matrix.**
 - This represents the True/False Negative/Positive rates as integer for each class. The data structure looks like:
 - [[True Negative, False Positive], [False Negative, True Positive]]

Attributes

- `source`** [str] Confusion Chart data source. Can be `validation`, `crossValidation` or `holdout`.
- `raw_data`** [dict] All of the raw data for the Confusion Chart
- `confusion_matrix`** [list of list] The NxN confusion matrix
- `classes`** [list] The names of each of the classes
- `class_metrics`** [list of dicts] List of dicts with schema described as `ClassMetrics` above.
- `source_model_id`** [str] ID of the model this Confusion chart represents; in some cases, insights from the parent of a frozen model may be used

2.3.12 Credentials

class `datarobot.models.Credential` (*credential_id: Optional[str] = None, name: Optional[str] = None, credential_type: Optional[str] = None, creation_date: Optional[datetime.datetime] = None, description: Optional[str] = None*)

classmethod `list` () → List[`datarobot.models.credential.Credential`]
Returns list of available credentials.

Returns

`credentials` [list of `Credential` instances] contains a list of available credentials.

Examples

```
>>> import datarobot as dr
>>> data_sources = dr.Credential.list()
>>> data_sources
[
  Credential('5e429d6ecf8a5f36c5693e03', 'my_s3_cred', 's3'),
  Credential('5e42cc4dcf8a5f3256865840', 'my_jdbc_cred', 'jdbc'),
]
```

classmethod `get(credential_id: str)` → `datarobot.models.credential.Credential`
Gets the Credential.

Parameters

credential_id [str] the identifier of the credential.

Returns

credential [Credential] the requested credential.

Examples

```
>>> import datarobot as dr
>>> cred = dr.Credential.get('5a8ac9ab07a57a0001be501f')
>>> cred
Credential('5e429d6ecf8a5f36c5693e03', 'my_s3_cred', 's3'),
```

delete() → None
Deletes the Credential the store.

Parameters

credential_id [str] the identifier of the credential.

Returns

credential [Credential] the requested credential.

Examples

```
>>> import datarobot as dr
>>> cred = dr.Credential.get('5a8ac9ab07a57a0001be501f')
>>> cred.delete()
```

classmethod `create_basic(name: str, user: str, password: str, description: Optional[str] = None)` → `datarobot.models.credential.Credential`
Creates the credentials.

Parameters

name [str] the name to use for this set of credentials.

user [str] the username to store for this set of credentials.

password [str] the password to store for this set of credentials.

description [str, optional] the description to use for this set of credentials.

Returns

credential [Credential] the created credential.

Examples

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_basic(
...     name='my_basic_cred',
...     user='username',
...     password='password',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e03', 'my_basic_cred', 'basic'),
```

classmethod create_oauth (*name: str, token: str, refresh_token: str, description: Optional[str] = None*) → datarobot.models.credential.Credential
Creates the OAUTH credentials.

Parameters

- name** [str] the name to use for this set of credentials.
- token: str** the OAUTH token
- refresh_token: str** The OAUTH token
- description** [str, optional] the description to use for this set of credentials.

Returns

credential [Credential] the created credential.

Examples

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_oauth(
...     name='my_oauth_cred',
...     token='XXX',
...     refresh_token='YYY',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e03', 'my_oauth_cred', 'oauth'),
```

classmethod create_s3 (*name: str, aws_access_key_id: Optional[str] = None, aws_secret_access_key: Optional[str] = None, aws_session_token: Optional[str] = None, description: Optional[str] = None*) → datarobot.models.credential.Credential
Creates the S3 credentials.

Parameters

- name** [str] the name to use for this set of credentials.
- aws_access_key_id** [str, optional] the AWS access key id.
- aws_secret_access_key** [str, optional] the AWS secret access key.
- aws_session_token** [str, optional] the AWS session token.
- description** [str, optional] the description to use for this set of credentials.

Returns

credential [Credential] the created credential.

Examples

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_s3(
...     name='my_s3_cred',
...     aws_access_key_id='XXX',
...     aws_secret_access_key='YYY',
...     aws_session_token='ZZZ',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e03', 'my_s3_cred', 's3'),
```

classmethod create_azure (*name: str, azure_connection_string: str, description: Optional[str] = None*) → datarobot.models.credential.Credential
Creates the Azure storage credentials.

Parameters

- name** [str] the name to use for this set of credentials.
- azure_connection_string** [str] the Azure connection string.
- description** [str, optional] the description to use for this set of credentials.

Returns

credential [Credential] the created credential.

Examples

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_azure(
...     name='my_azure_cred',
...     azure_connection_string='XXX',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e03', 'my_azure_cred', 'azure'),
```

classmethod create_gcp (*name: str, gcp_key: Union[str, Dict[str, str], None] = None, description: Optional[str] = None*) → datarobot.models.credential.Credential
Creates the GCP credentials.

Parameters

- name** [str] the name to use for this set of credentials.
- gcp_key** [str | dict] the GCP key in json format or parsed as dict.
- description** [str, optional] the description to use for this set of credentials.

Returns

credential [Credential] the created credential.

Examples

```
>>> import datarobot as dr
>>> cred = dr.Credential.create_gcp(
...     name='my_gcp_cred',
...     gcp_key='XXX',
... )
>>> cred
Credential('5e429d6ecf8a5f36c5693e03', 'my_gcp_cred', 'gcp'),
```

2.3.13 Custom Models

class `datarobot.models.custom_model_version.CustomModelFileItem`(*id*, *file_name*, *file_path*, *file_source*, *created_at*=None)

A file item attached to a DataRobot custom model version.

New in version v2.21.

Attributes

- id:** **str** id of the file item
- file_name:** **str** name of the file item
- file_path:** **str** path of the file item
- file_source:** **str** source of the file item
- created_at:** **str, optional** ISO-8601 formatted timestamp of when the version was created

class `datarobot.CustomInferenceModel` (**kwargs)

A custom inference model.

New in version v2.21.

Attributes

- id:** **str** id of the custom model
- name:** **str** name of the custom model
- language:** **str** programming language of the custom model. Can be `python`, `java`, or `other`
- description:** **str** description of the custom model
- target_type:** **datarobot.TARGET_TYPE** target type of the custom inference model. Values: [`datarobot.TARGET_TYPE.BINARY`, `datarobot.TARGET_TYPE.REGRESSION`, `datarobot.TARGET_TYPE.MULTICLASS`, `datarobot.TARGET_TYPE.UNSTRUCTURED`, `datarobot.TARGET_TYPE.ANOMALY`]
- target_name:** **str, optional** Target feature name; it is optional(ignored if provided) for `datarobot.TARGET_TYPE.UNSTRUCTURED` or `datarobot.TARGET_TYPE.ANOMALY` target type
- latest_version:** **datarobot.CustomModelVersion or None** latest version of the custom model if the model has a latest version
- deployments_count:** **int** number of a deployments of the custom models

target_name: str custom model target name

positive_class_label: str for binary classification projects, a label of a positive class

negative_class_label: str for binary classification projects, a label of a negative class

prediction_threshold: float for binary classification projects, a threshold used for predictions

training_data_assignment_in_progress: bool flag describing if training data assignment is in progress

training_dataset_id: str, optional id of a dataset assigned to the custom model

training_dataset_version_id: str, optional id of a dataset version assigned to the custom model

training_data_file_name: str, optional name of assigned training data file

training_data_partition_column: str, optional name of a partition column in a training dataset assigned to the custom model

created_by: str username of a user who user who created the custom model

updated_at: str ISO-8601 formatted timestamp of when the custom model was updated

created_at: str ISO-8601 formatted timestamp of when the custom model was created

network_egress_policy: datarobot.NETWORK_EGRESS_POLICY, optional Determines whether the given custom model is isolated, or can access the public network. Can be either `datarobot.NONE` or `datarobot.PUBLIC`

maximum_memory: int, optional The maximum memory that might be allocated by the custom-model. If exceeded, the custom-model will be killed by k8s

replicas: int, optional A fixed number of replicas that will be deployed in the cluster

classmethod list (*is_deployed=None, search_for=None, order_by=None*)

List custom inference models available to the user.

New in version v2.21.

Parameters

is_deployed: bool, optional flag for filtering custom inference models. If set to *True*, only deployed custom inference models are returned. If set to *False*, only not deployed custom inference models are returned

search_for: str, optional string for filtering custom inference models - only custom inference models that contain the string in name or description will be returned. If not specified, all custom models will be returned

order_by: str, optional property to sort custom inference models by. Supported properties are `created` and `updated`. Prefix the attribute name with a dash to sort in descending order, e.g. `order_by=-created`. By default, the `order_by` parameter is `None` which will result in custom models being returned in order of creation time descending

Returns

List[CustomInferenceModel] a list of custom inference models.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod `get` (*custom_model_id*)

Get custom inference model by id.

New in version v2.21.

Parameters

custom_model_id: **str** id of the custom inference model

Returns

CustomInferenceModel retrieved custom inference model

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

download_latest_version (*file_path*)

Download the latest custom inference model version.

New in version v2.21.

Parameters

file_path: **str** path to create a file with custom model version content

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

classmethod `create` (*name*, *target_type*, *target_name=None*, *language=None*, *description=None*, *positive_class_label=None*, *negative_class_label=None*, *prediction_threshold=None*, *class_labels=None*, *class_labels_file=None*, *network_egress_policy=None*, *maximum_memory=None*, *replicas=None*)

Create a custom inference model.

New in version v2.21.

Parameters

name: **str** name of the custom inference model

target_type: **datarobot.TARGET_TYPE** target type of the custom inference model. Values: [*datarobot.TARGET_TYPE.BINARY*, *datarobot.TARGET_TYPE.REGRESSION*, *datarobot.TARGET_TYPE.MULTICLASS*, *datarobot.TARGET_TYPE.UNSTRUCTURED*]

target_name: **str, optional** Target feature name; it is optional(ignored if provided) for *datarobot.TARGET_TYPE.UNSTRUCTURED* target type

language: **str, optional** programming language of the custom learning model

description: **str, optional** description of the custom learning model

positive_class_label: **str, optional** custom inference model positive class label for binary classification

negative_class_label: **str, optional** custom inference model negative class label for binary classification

prediction_threshold: **float, optional** custom inference model prediction threshold

class_labels: **List[str], optional** custom inference model class labels for multiclass classification Cannot be used with *class_labels_file*

class_labels_file: str, optional path to file containing newline separated class labels for multiclass classification. Cannot be used with `class_labels`

network_egress_policy: datarobot.NETWORK_EGRESS_POLICY, optional
Determines whether the given custom model is isolated, or can access the public network. Can be either `datarobot.NONE` or `datarobot.PUBLIC`

maximum_memory: int, optional The maximum memory that might be allocated by the custom-model. If exceeded, the custom-model will be killed by k8s

replicas: int, optional A fixed number of replicas that will be deployed in the cluster

Returns

CustomInferenceModel created a custom inference model

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod copy_custom_model (*custom_model_id*)

Create a custom inference model by copying existing one.

New in version v2.21.

Parameters

custom_model_id: str id of the custom inference model to copy

Returns

CustomInferenceModel created a custom inference model

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

update (*name=None, language=None, description=None, target_name=None, positive_class_label=None, negative_class_label=None, prediction_threshold=None, class_labels=None, class_labels_file=None*)

Update custom inference model properties.

New in version v2.21.

Parameters

name: str, optional new custom inference model name

language: str, optional new custom inference model programming language

description: str, optional new custom inference model description

target_name: str, optional new custom inference model target name

positive_class_label: str, optional new custom inference model positive class label

negative_class_label: str, optional new custom inference model negative class label

prediction_threshold: float, optional new custom inference model prediction threshold

class_labels: List[str], optional custom inference model class labels for multiclass classification Cannot be used with `class_labels_file`

class_labels_file: str, optional path to file containing newline separated class labels for multiclass classification. Cannot be used with `class_labels`

Raises**datarobot.errors.ClientError** if the server responded with 4xx status.**datarobot.errors.ServerError** if the server responded with 5xx status.**refresh()**

Update custom inference model with the latest data from server.

New in version v2.21.

Raises**datarobot.errors.ClientError** if the server responded with 4xx status**datarobot.errors.ServerError** if the server responded with 5xx status**delete()**

Delete custom inference model.

New in version v2.21.

Raises**datarobot.errors.ClientError** if the server responded with 4xx status**datarobot.errors.ServerError** if the server responded with 5xx status**assign_training_data(dataset_id, partition_column=None, max_wait=600)**

Assign training data to the custom inference model.

New in version v2.21.

Parameters**dataset_id: str** the id of the training dataset to be assigned**partition_column: str, optional** name of a partition column in the training dataset**max_wait: int, optional** max time to wait for a training data assignment. If set to None - method will return without waiting. Defaults to 10 min**Raises****datarobot.errors.ClientError** if the server responded with 4xx status**datarobot.errors.ServerError** if the server responded with 5xx status**class datarobot.CustomModelTest(**kwargs)**

An custom model test.

New in version v2.21.

Attributes**id: str** test id**custom_model_image_id: str** id of a custom model image**image_type: str** the type of the image, either CUSTOM_MODEL_IMAGE_TYPE.CUSTOM_MODEL_IMAGE if the testing attempt is using a CustomModelImage as its model or CUSTOM_MODEL_IMAGE_TYPE.CUSTOM_MODEL_VERSION if the testing attempt is using a CustomModelVersion with dependency management**overall_status: str** a string representing testing status. Status can be - `not_tested`: the check not run - `failed`: the check failed - `succeeded`: the check succeeded - `warning`: the check resulted in a warning, or in non-critical failure - `in_progress`: the check is in progress

detailed_status: **dict** detailed testing status - maps the testing types to their status and message. The keys of the dict are one of `errorCheck`, `nullValueImputation`, `longRunningService`, `sideEffects`. The values are dict with `message` and `status` keys.

created_by: **str** a user who created a test

dataset_id: **str, optional** id of a dataset used for testing

dataset_version_id: **str, optional** id of a dataset version used for testing

completed_at: **str, optional** ISO-8601 formatted timestamp of when the test has completed

created_at: **str, optional** ISO-8601 formatted timestamp of when the version was created

network_egress_policy: **datarobot.NETWORK_EGRESS_POLICY, optional** Determines whether the given custom model is isolated, or can access the public network. Can be either `datarobot.NONE` or `datarobot.PUBLIC`

maximum_memory: **int, optional** The maximum memory that might be allocated by the custom-model. If exceeded, the custom-model will be killed by k8s

replicas: **int, optional** A fixed number of replicas that will be deployed in the cluster

classmethod create (*custom_model_id*, *custom_model_version_id*, *dataset_id=None*, *max_wait=600*, *network_egress_policy=None*, *maximum_memory=None*, *replicas=None*)

Create and start a custom model test.

New in version v2.21.

Parameters

custom_model_id: **str** the id of the custom model

custom_model_version_id: **str** the id of the custom model version

dataset_id: **str, optional** The id of the testing dataset for non-unstructured custom models. Ignored and not required for unstructured models.

max_wait: **int, optional** max time to wait for a test completion. If set to None - method will return without waiting.

network_egress_policy: **datarobot.NETWORK_EGRESS_POLICY, optional** Determines whether the given custom model is isolated, or can access the public network. Can be either `datarobot.NONE` or `datarobot.PUBLIC`

maximum_memory: **int, optional** The maximum memory that might be allocated by the custom-model. If exceeded, the custom-model will be killed by k8s

replicas: **int, optional** A fixed number of replicas that will be deployed in the cluster

Returns

CustomModelTest created custom model test

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod list (*custom_model_id*)

List custom model tests.

New in version v2.21.

Parameters

custom_model_id: str the id of the custom model

Returns

List[CustomModelTest] a list of custom model tests

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod get (*custom_model_test_id*)

Get custom model test by id.

New in version v2.21.

Parameters

custom_model_test_id: str the id of the custom model test

Returns

CustomModelTest retrieved custom model test

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

get_log ()

Get log of a custom model test.

New in version v2.21.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

get_log_tail ()

Get log tail of a custom model test.

New in version v2.21.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

cancel ()

Cancel custom model test that is in progress.

New in version v2.21.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

refresh ()

Update custom model test with the latest data from server.

New in version v2.21.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

class `datarobot.CustomModelVersion` (**kwargs)

A version of a DataRobot custom model.

New in version v2.21.

Attributes

id: str id of the custom model version

custom_model_id: str id of the custom model

version_minor: int a minor version number of custom model version

version_major: int a major version number of custom model version

is_frozen: bool a flag if the custom model version is frozen

items: List[CustomModelFileItem] a list of file items attached to the custom model version

base_environment_id: str id of the environment to use with the model

base_environment_version_id: str id of the environment version to use with the model

label: str, optional short human readable string to label the version

description: str, optional custom model version description

created_at: str, optional ISO-8601 formatted timestamp of when the version was created

dependencies: List[CustomDependency] the parsed dependencies of the custom model version if the version has a valid requirements.txt file

network_egress_policy: datarobot.NETWORK_EGRESS_POLICY, optional Determines whether the given custom model is isolated, or can access the public network. Can be either `datarobot.NONE` or `datarobot.PUBLIC`

maximum_memory: int, optional The maximum memory that might be allocated by the custom-model. If exceeded, the custom-model will be killed by k8s

replicas: int, optional A fixed number of replicas that will be deployed in the cluster

required_metadata_values: List[RequiredMetadataValue] Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.

classmethod `from_server_data` (data, keep_attrs=None)

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

```
classmethod create_clean (custom_model_id, base_environment_id, is_major_update=True,
                          folder_path=None, files=None, network_egress_policy=None,
                          maximum_memory=None, replicas=None, required_metadata_values=None)
```

Create a custom model version without files from previous versions.

New in version v2.21.

Parameters

custom_model_id: str the id of the custom model

base_environment_id: str the id of the base environment to use with the custom model version

is_major_update: bool the flag defining if a custom model version will be a minor or a major version. Default to *True*

folder_path: str, optional the path to a folder containing files to be uploaded. Each file in the folder is uploaded under path relative to a folder path

files: list, optional the list of tuples, where values in each tuple are the local filesystem path and the path the file should be placed in the model. if list is of strings, then basenames will be used for tuples Example: [(*~/home/user/Documents/myModel/file1.txt*, *~/file1.txt*), (*~/home/user/Documents/myModel/folder/file2.txt*, *~/folder/file2.txt*)] or [*~/home/user/Documents/myModel/file1.txt*, *~/home/user/Documents/myModel/folder/file2.txt*]

network_egress_policy: datarobot.NETWORK_EGRESS_POLICY, optional

Determines whether the given custom model is isolated, or can access the public network. Can be either *datarobot.NONE* or *datarobot.PUBLIC*

maximum_memory: int, optional The maximum memory that might be allocated by the custom-model. If exceeded, the custom-model will be killed by k8s

replicas: int, optional A fixed number of replicas that will be deployed in the cluster

required_metadata_values: List[RequiredMetadataValue] Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.

Returns

CustomModelVersion created custom model version

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod create_from_previous (custom_model_id, base_environment_id,
                                   is_major_update=True, folder_path=None, files=None,
                                   files_to_delete=None, network_egress_policy=None,
                                   maximum_memory=None, replicas=None,
                                   required_metadata_values=None)
```

Create a custom model version containing files from a previous version.

New in version v2.21.

Parameters

custom_model_id: str the id of the custom model

base_environment_id: str the id of the base environment to use with the custom model version

is_major_update: bool, optional the flag defining if a custom model version will be a minor or a major version. Default to *True*

folder_path: str, optional the path to a folder containing files to be uploaded. Each file in the folder is uploaded under path relative to a folder path

files: list, optional the list of tuples, where values in each tuple are the local filesystem path and the path the file should be placed in the model. if list is of strings, then basenames will be used for tuples Example: [(`~/home/user/Documents/myModel/file1.txt`, `~/file1.txt`), (`~/home/user/Documents/myModel/folder/file2.txt`, `~/folder/file2.txt`)] or [`~/home/user/Documents/myModel/file1.txt`, `~/home/user/Documents/myModel/folder/file2.txt`]

files_to_delete: list, optional the list of a file items ids to be deleted Example: [`5ea95f7a4024030aba48e4f9`, `5ea6b5da402403181895cc51`]

network_egress_policy: datarobot.NETWORK_EGRESS_POLICY, optional
Determines whether the given custom model is isolated, or can access the public network. Can be either `datarobot.NONE` or `datarobot.PUBLIC`

maximum_memory: int, optional The maximum memory that might be allocated by the custom-model. If exceeded, the custom-model will be killed by k8s

replicas: int, optional A fixed number of replicas that will be deployed in the cluster

required_metadata_values: List[RequiredMetadataValue] Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.

Returns

CustomModelVersion created custom model version

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod list (*custom_model_id*)

List custom model versions.

New in version v2.21.

Parameters

custom_model_id: str the id of the custom model

Returns

List[CustomModelVersion] a list of custom model versions

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod get (*custom_model_id*, *custom_model_version_id*)

Get custom model version by id.

New in version v2.21.

Parameters**custom_model_id: str** the id of the custom model**custom_model_version_id: str** the id of the custom model version to retrieve**Returns****CustomModelVersion** retrieved custom model version**Raises****datarobot.errors.ClientError** if the server responded with 4xx status.**datarobot.errors.ServerError** if the server responded with 5xx status.**download** (*file_path*)

Download custom model version.

New in version v2.21.

Parameters**file_path: str** path to create a file with custom model version content**Raises****datarobot.errors.ClientError** if the server responded with 4xx status.**datarobot.errors.ServerError** if the server responded with 5xx status.**update** (*description=None, required_metadata_values=None*)

Update custom model version properties.

New in version v2.21.

Parameters**description: str** new custom model version description**required_metadata_values: List[RequiredMetadataValue]** Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.**Raises****datarobot.errors.ClientError** if the server responded with 4xx status.**datarobot.errors.ServerError** if the server responded with 5xx status.**refresh** ()

Update custom model version with the latest data from server.

New in version v2.21.

Raises**datarobot.errors.ClientError** if the server responded with 4xx status**datarobot.errors.ServerError** if the server responded with 5xx status**get_feature_impact** (*with_metadata=False*)

Get custom model feature impact.

New in version v2.23.

Parameters**with_metadata** [bool] The flag indicating if the result should include the metadata as well.

Returns

feature_impacts [list of dict] The feature impact data. Each item is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

calculate_feature_impact (*max_wait=600*)

Calculate custom model feature impact.

New in version v2.23.

Parameters

max_wait: int, optional max time to wait for feature impact calculation. If set to None - method will return without waiting. Defaults to 10 min

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

class `datarobot.models.execution_environment.RequiredMetadataKey` (***kwargs*)

Definition of a metadata key that custom models using this environment must define

New in version v2.25.

Attributes

field_name: str The required field key. This value will be added as an environment variable when running custom models.

display_name: str A human readable name for the required field.

class `datarobot.models.CustomModelVersionConversion` (***kwargs*)

A conversion of a DataRobot custom model version.

New in version v2.27.

Attributes

id: str ID of the custom model version conversion.

custom_model_version_id: str ID of the custom model version.

created: str ISO-8601 timestamp of when the custom model conversion created.

main_program_item_id: str or None ID of the main program item.

log_message: str or None The conversion output log message.

generated_metadata: dict or None The dict contains two items: `outputDataset` & `outputColumns`.

conversion_succeeded: bool Whether the conversion succeeded or not.

conversion_in_progress: bool Whether a given conversion is in progress or not.

should_stop: bool Whether the user asked to stop a conversion.

classmethod `run_conversion` (*custom_model_id*, *custom_model_version_id*,
main_program_item_id, *max_wait=None*)

Initiate a new custom model version conversion.

Parameters

- custom_model_id** [str] The associated custom model ID.
- custom_model_version_id** [str] The associated custom model version ID.
- main_program_item_id** [str] The selected main program item ID. This should be one of the SAS items in the associated custom model version.
- max_wait: int or None** Max wait time in seconds. If None, then don't wait.

Returns

- conversion_id** [str] The ID of the newly created conversion entity.

Raises

- datarobot.errors.ClientError** if the server responded with 4xx status
- datarobot.errors.ServerError** if the server responded with 5xx status

classmethod stop_conversion (*custom_model_id, custom_model_version_id, conversion_id*)
Stop a conversion that is in progress.

Parameters

- custom_model_id** [str] ID of the associated custom model.
- custom_model_version_id** [str] ID of the associated custom model version.
- conversion_id** ID of a conversion that is in-progress.

Raises

- datarobot.errors.ClientError** if the server responded with 4xx status.
- datarobot.errors.ServerError** if the server responded with 5xx status.

classmethod get (*custom_model_id, custom_model_version_id, conversion_id*)
Get custom model version conversion by id.

New in version v2.27.

Parameters

- custom_model_id: str** The ID of the custom model.
- custom_model_version_id: str** The ID of the custom model version.
- conversion_id: str** The ID of the conversion to retrieve.

Returns

- CustomModelVersionConversion** Retrieved custom model version conversion.

Raises

- datarobot.errors.ClientError** if the server responded with 4xx status.
- datarobot.errors.ServerError** if the server responded with 5xx status.

classmethod get_latest (*custom_model_id, custom_model_version_id*)
Get latest custom model version conversion for a given custom model version.

New in version v2.27.

Parameters

- custom_model_id: str** The ID of the custom model.

custom_model_version_id: str The ID of the custom model version.

Returns

CustomModelVersionConversion or None Retrieved latest conversion for a given custom model version.

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

classmethod list (*custom_model_id, custom_model_version_id*)

Get custom model version conversions list per custom model version.

New in version v2.27.

Parameters

custom_model_id: str The ID of the custom model.

custom_model_version_id: str The ID of the custom model version.

Returns

List[CustomModelVersionConversion] Retrieved conversions for a given custom model version.

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

class `datarobot.CustomModelVersionDependencyBuild` (**kwargs)

Metadata about a DataRobot custom model version's dependency build

New in version v2.22.

Attributes

custom_model_id: str id of the custom model

custom_model_version_id: str id of the custom model version

build_status: str the status of the custom model version's dependency build

started_at: str ISO-8601 formatted timestamp of when the build was started

completed_at: str, optional ISO-8601 formatted timestamp of when the build has completed

classmethod get_build_info (*custom_model_id, custom_model_version_id*)

Retrieve information about a custom model version's dependency build

New in version v2.22.

Parameters

custom_model_id: str the id of the custom model

custom_model_version_id: str the id of the custom model version

Returns

CustomModelVersionDependencyBuild the dependency build information

classmethod start_build (*custom_model_id, custom_model_version_id, max_wait=600*)

Start the dependency build for a custom model version dependency build

New in version v2.22.

Parameters

custom_model_id: str the id of the custom model

custom_model_version_id: str the id of the custom model version

max_wait: int, optional max time to wait for a build completion. If set to None - method will return without waiting.

get_log ()

Get log of a custom model version dependency build.

New in version v2.22.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

cancel ()

Cancel custom model version dependency build that is in progress.

New in version v2.22.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

refresh ()

Update custom model version dependency build with the latest data from server.

New in version v2.22.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

class `datarobot.ExecutionEnvironment` (***kwargs*)

An execution environment entity.

New in version v2.21.

Attributes

id: str the id of the execution environment

name: str the name of the execution environment

description: str, optional the description of the execution environment

programming_language: str, optional the programming language of the execution environment. Can be `python`, `java` or `other`

is_public: bool, optional public accessibility of environment, visible only for admin user

created_at: str, optional ISO-8601 formatted timestamp of when the execution environment version was created

latest_version: ExecutionEnvironmentVersion, optional the latest version of the execution environment

classmethod create (*name*, *description=None*, *programming_language=None*, *required_metadata_keys=None*)

Create an execution environment.

New in version v2.21.

Parameters

name: str execution environment name

description: str, optional execution environment description

programming_language: str, optional programming language of the environment to be created. Can be `python`, `jr`, `java` or `other`. Default value - `other`

required_metadata_keys: List[RequiredMetadataKey] Definition of a metadata keys that custom models using this environment must define

Returns

ExecutionEnvironment created execution environment

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod list (*search_for=None*)

List execution environments available to the user.

New in version v2.21.

Parameters

search_for: str, optional the string for filtering execution environment - only execution environments that contain the string in name or description will be returned.

Returns

List[ExecutionEnvironment] a list of execution environments.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod get (*execution_environment_id*)

Get execution environment by its id.

New in version v2.21.

Parameters

execution_environment_id: str ID of the execution environment to retrieve

Returns

ExecutionEnvironment retrieved execution environment

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

delete ()

Delete execution environment.

New in version v2.21.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

update (*name=None, description=None, required_metadata_keys=None*)

Update execution environment properties.

New in version v2.21.

Parameters

name: str, optional new execution environment name

description: str, optional new execution environment description

required_metadata_keys: List[RequiredMetadataKey] Definition of a metadata keys that custom models using this environment must define

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

refresh ()

Update execution environment with the latest data from server.

New in version v2.21.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

class `datarobot.ExecutionEnvironmentVersion` (***kwargs*)

A version of a DataRobot execution environment.

New in version v2.21.

Attributes

id: str the id of the execution environment version

environment_id: str the id of the execution environment the version belongs to

build_status: str the status of the execution environment version build

label: str, optional the label of the execution environment version

description: str, optional the description of the execution environment version

created_at: str, optional ISO-8601 formatted timestamp of when the execution environment version was created

docker_context_size: int, optional The size of the uploaded Docker context in bytes if available or None if not

docker_image_size: int, optional The size of the built Docker image in bytes if available or None if not

classmethod create (*execution_environment_id*, *docker_context_path*, *label=None*, *description=None*, *max_wait=600*)

Create an execution environment version.

New in version v2.21.

Parameters

- execution_environment_id: str** the id of the execution environment
- docker_context_path: str** the path to a docker context archive or folder
- label: str, optional** short human readable string to label the version
- description: str, optional** execution environment version description
- max_wait: int, optional** max time to wait for a final build status (â€œsuccessâ€ or â€œfailedâ€). If set to None - method will return without waiting.

Returns

ExecutionEnvironmentVersion created execution environment version

Raises

- datarobot.errors.AsyncTimeoutError** if version did not reach final state during timeout seconds
- datarobot.errors.ClientError** if the server responded with 4xx status
- datarobot.errors.ServerError** if the server responded with 5xx status

classmethod list (*execution_environment_id*, *build_status=None*)

List execution environment versions available to the user.

New in version v2.21.

Parameters

- execution_environment_id: str** the id of the execution environment
- build_status: str, optional** build status of the execution environment version to filter by. See `datarobot.enums.EXECUTION_ENVIRONMENT_VERSION_BUILD_STATUS` for valid options

Returns

List[ExecutionEnvironmentVersion] a list of execution environment versions.

Raises

- datarobot.errors.ClientError** if the server responded with 4xx status
- datarobot.errors.ServerError** if the server responded with 5xx status

classmethod get (*execution_environment_id*, *version_id*)

Get execution environment version by id.

New in version v2.21.

Parameters

- execution_environment_id: str** the id of the execution environment
- version_id: str** the id of the execution environment version to retrieve

Returns

ExecutionEnvironmentVersion retrieved execution environment version

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

download (*file_path*)

Download execution environment version.

New in version v2.21.

Parameters

file_path: str path to create a file with execution environment version content

Returns

ExecutionEnvironmentVersion retrieved execution environment version

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

get_build_log ()

Get execution environment version build log and error.

New in version v2.21.

Returns

Tuple[str, str] retrieved execution environment version build log and error. If there is no build error - None is returned.

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

refresh ()

Update execution environment version with the latest data from server.

New in version v2.21.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

2.3.14 Custom Tasks

```
class datarobot.CustomTask (id: str, target_type: datarobot.enums.CUSTOM_TASK_TARGET_TYPE,
latest_version: Optional[datarobot.models.custom_task_version.CustomTaskVersion],
created_at: str, updated_at: str, name: str, description: str, language:
datarobot.enums.Enum, created_by: str, calibrate_predictions:
Optional[bool] = None)
```

A custom task. This can be in a partial state or a complete state. When the *latest_version* is *None*, the empty task has been initialized with some metadata. It is not yet use-able for actual training. Once the first *CustomTaskVersion* has been created, you can put the *CustomTask* in *UserBlueprints* to train *Models* in *Projects*

New in version v2.26.

Attributes

id: **str** id of the custom task

name: **str** name of the custom task

language: **str** programming language of the custom task. Can be `python`, `java` or `other`

description: **str** description of the custom task

target_type: **datarobot.enums.CUSTOM_TASK_TARGET_TYPE** the target type of the custom task. One of:

- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.BINARY`
- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.REGRESSION`
- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.MULTICLASS`
- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.ANOMALY`
- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.TRANSFORM`

latest_version: **datarobot.CustomTaskVersion** or **None** latest version of the custom task if the task has a latest version. If the latest version is `None`, the custom task is not ready for use in user blueprints. You must create its first `CustomTaskVersion` before you can use the `CustomTask`

created_by: **str** username of a user who user who created the custom task

updated_at: **str** ISO-8601 formatted timestamp of when the custom task was updated

created_at: **str** ISO-8601 formatted timestamp of when the custom task was created

calibrate_predictions: **bool** whether anomaly predictions should be calibrated to be between 0 and 1 by DR. only applies to custom estimators with target type `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.ANOMALY`

```
classmethod from_server_data (data: Union[Dict[str, Any], List[Dict[str, Any]]],
                               keep_attrs: Optional[Iterable[str]] = None) →
                               datarobot.models.custom_task.CustomTask
```

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are `None`

```
classmethod list (order_by: Optional[str] = None, search_for: Optional[str] = None) →
                  List[datarobot.models.custom_task.CustomTask]
```

List custom tasks available to the user.

New in version v2.26.

Parameters

search_for: **str, optional** string for filtering custom tasks - only tasks that contain the string in name or description will be returned. If not specified, all custom task will be returned

order_by: **str, optional** property to sort custom tasks by. Supported properties are `created` and `updated`. Prefix the attribute name with a dash to sort in descending order, e.g. `order_by=-created`. By default, the `order_by` parameter is `None` which will result in custom tasks being returned in order of creation time descending

Returns

List[CustomTask] a list of custom tasks.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod get (*custom_task_id: str*) → datarobot.models.custom_task.CustomTask
Get custom task by id.

New in version v2.26.

Parameters

custom_task_id: str id of the custom task

Returns

CustomTask retrieved custom task

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

classmethod copy (*custom_task_id: str*) → datarobot.models.custom_task.CustomTask
Create a custom task by copying existing one.

New in version v2.26.

Parameters

custom_task_id: str id of the custom task to copy

Returns

CustomTask

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod create (*name: str, target_type: datarobot.enums.CUSTOM_TASK_TARGET_TYPE, language: Optional[datarobot.enums.Enum] = None, description: Optional[str] = None, calibrate_predictions: Optional[bool] = None, **kwargs*) → datarobot.models.custom_task.CustomTask

Creates *only the metadata* for a custom task. This task will not be use-able until you have created a CustomTaskVersion attached to this task.

New in version v2.26.

Parameters

name: str name of the custom task

target_type: datarobot.enums.CUSTOM_TASK_TARGET_TYPE the target typed based on the following values. Anything else will raise an error

- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.BINARY`
- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.REGRESSION`
- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.MULTICLASS`

- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.ANOMALY`
- `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.TRANSFORM`

language: **str, optional** programming language of the custom task. Can be `python`, `java` or `other`

description: **str, optional** description of the custom task

calibrate_predictions: **bool, optional** whether anomaly predictions should be calibrated to be between 0 and 1 by DR. if `None`, uses default value from DR app (`True`). only applies to custom estimators with target type `datarobot.enums.CUSTOM_TASK_TARGET_TYPE.ANOMALY`

Returns

CustomTask

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

update (*name: Optional[str] = None, language: Optional[datarobot.enums.Enum] = None, description: Optional[str] = None, **kwargs*) → `None`
Update custom task properties.

New in version v2.26.

Parameters

name: **str, optional** new custom task name

language: **str, optional** new custom task programming language

description: **str, optional** new custom task description

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

refresh () → `None`
Update custom task with the latest data from server.

New in version v2.26.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

delete () → `None`
Delete custom task.

New in version v2.26.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

download_latest_version (*file_path: str*) → None

Download the latest custom task version.

New in version v2.26.

Parameters

file_path: str the full path of the target zip file

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

get_access_list () → List[datarobot.models.sharing.SharingAccess]

Retrieve access control settings of this custom task.

New in version v2.27.

Returns

list of [class:SharingAccess <datarobot.SharingAccess>]

share (*access_list: List[datarobot.models.sharing.SharingAccess]*) → None

Update the access control settings of this custom task.

New in version v2.27.

Parameters

access_list [list of *SharingAccess*] A list of SharingAccess to update.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

Examples

Transfer access to the custom task from `old_user@datarobot.com` to `new_user@datarobot.com`

```
import datarobot as dr

new_access = dr.SharingAccess(new_user@datarobot.com,
                              dr.enums.SHARING_ROLE.OWNER, can_share=True)
access_list = [dr.SharingAccess(old_user@datarobot.com, None), new_access]

dr.CustomTask.get('custom-task-id').share(access_list)
```

```
class datarobot.models.custom_task_version.CustomTaskFileItem(id, file_name,
                                                              file_path,
                                                              file_source, created_at=None)
```

A file item attached to a DataRobot custom task version.

New in version v2.26.

Attributes

id: str id of the file item

file_name: str name of the file item

file_path: `str` path of the file item

file_source: `str` source of the file item

created_at: `str` ISO-8601 formatted timestamp of when the version was created

```
class datarobot.CustomTaskVersion(id, custom_task_id, version_major, version_minor, label, created_at, is_frozen, items, description=None, base_environment_id=None, maximum_memory=None, base_environment_version_id=None, dependencies=None, required_metadata_values=None, arguments=None)
```

A version of a DataRobot custom task.

New in version v2.26.

Attributes

id: `str` id of the custom task version

custom_task_id: `str` id of the custom task

version_minor: `int` a minor version number of custom task version

version_major: `int` a major version number of custom task version

label: `str` short human readable string to label the version

created_at: `str` ISO-8601 formatted timestamp of when the version was created

is_frozen: `bool` a flag if the custom task version is frozen

items: `List[CustomTaskFileItem]` a list of file items attached to the custom task version

description: `str, optional` custom task version description

base_environment_id: `str, optional` id of the environment to use with the task

base_environment_version_id: `str, optional` id of the environment version to use with the task

dependencies: `List[CustomDependency]` the parsed dependencies of the custom task version if the version has a valid requirements.txt file

required_metadata_values: `List[RequiredMetadataValue]` Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.

arguments: `List[UserBlueprintTaskArgument]` A list of custom task version arguments.

```
classmethod from_server_data(data, keep_attrs=None)
```

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [`dict`] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [`iterable`] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

```
classmethod create_clean(custom_task_id, base_environment_id, maximum_memory=None, is_major_update=True, folder_path=None, required_metadata_values=None)
```

Create a custom task version without files from previous versions.

New in version v2.26.

Parameters

- custom_task_id: str** the id of the custom task
- base_environment_id: str** the id of the base environment to use with the custom task version
- is_major_update: bool, optional** if the current version is 2.3, *True* would set the new version at 3.0. *False* would set the new version at 2.4. Default to *True*
- folder_path: str, optional** the path to a folder containing files to be uploaded. Each file in the folder is uploaded under path relative to a folder path
- required_metadata_values: List[RequiredMetadataValue]** Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.
- maximum_memory: int** A number in bytes about how much memory custom tasks's inference containers can run with.

Returns

CustomTaskVersion created custom task version

Raises

- datarobot.errors.ClientError** if the server responded with 4xx status
- datarobot.errors.ServerError** if the server responded with 5xx status

```
classmethod create_from_previous (custom_task_id, base_environment_id,
                                  is_major_update=True, folder_path=None,
                                  files_to_delete=None, re-
                                  quired_metadata_values=None, maxi-
                                  mum_memory=None)
```

Create a custom task version containing files from a previous version.

New in version v2.26.

Parameters

- custom_task_id: str** the id of the custom task
- base_environment_id: str** the id of the base environment to use with the custom task version
- is_major_update: bool, optional** if the current version is 2.3, *True* would set the new version at 3.0. *False* would set the new version at 2.4. Default to *True*
- folder_path: str, optional** the path to a folder containing files to be uploaded. Each file in the folder is uploaded under path relative to a folder path
- files_to_delete: list, optional** the list of a file items ids to be deleted Example: [*âĀĪJ5ea95f7a4024030aba48e4f9âĀĪ, âĀĪJ5ea6b5da402403181895cc51âĀĪ*]
- required_metadata_values: List[RequiredMetadataValue]** Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.
- maximum_memory: int** A number in bytes about how much memory custom tasks's inference containers can run with.

Returns

CustomTaskVersion created custom task version

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod list (*custom_task_id*)

List custom task versions.

New in version v2.26.

Parameters

custom_task_id: str the id of the custom task

Returns

List[CustomTaskVersion] a list of custom task versions

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod get (*custom_task_id, custom_task_version_id*)

Get custom task version by id.

New in version v2.26.

Parameters

custom_task_id: str the id of the custom task

custom_task_version_id: str the id of the custom task version to retrieve

Returns

CustomTaskVersion retrieved custom task version

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

download (*file_path*)

Download custom task version.

New in version v2.26.

Parameters

file_path: str path to create a file with custom task version content

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

update (*description=None, required_metadata_values=None*)

Update custom task version properties.

New in version v2.26.

Parameters

description: str new custom task version description

required_metadata_values: List[RequiredMetadataValue] Additional parameters required by the execution environment. The required keys are defined by the fieldNames in the base environment's requiredMetadataKeys.

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

refresh()

Update custom task version with the latest data from server.

New in version v2.26.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

start_dependency_build()

Start the dependency build for a custom task version and return build status. .. versionadded:: v2.27

Returns

CustomTaskVersionDependencyBuild DTO of custom task version dependency build.

start_dependency_build_and_wait(max_wait)

Start the dependency build for a custom task version and wait while pulling status. .. versionadded:: v2.27

Parameters

max_wait: int max time to wait for a build completion

Returns

CustomTaskVersionDependencyBuild DTO of custom task version dependency build.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

datarobot.errors.AsyncTimeoutError Raised if the dependency build is not finished after max_wait.

cancel_dependency_build()

Cancel custom task version dependency build that is in progress. .. versionadded:: v2.27

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

get_dependency_build()

Retrieve information about a custom task version's dependency build. .. versionadded:: v2.27

Returns

CustomTaskVersionDependencyBuild DTO of custom task version dependency build.

download_dependency_build_log(file_directory='.')

Get log of a custom task version dependency build. .. versionadded:: v2.27

Parameters

file_directory: **str** (optional, default is `âĀĪJ.âĀĪ`) Directory path where downloaded file is to save.

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

2.3.15 Database Connectivity

class `datarobot.DataDriver` (*id: Optional[str] = None, creator: Optional[str] = None, base_names: Optional[List[str]] = None, class_name: Optional[str] = None, canonical_name: Optional[str] = None*)

A data driver

Attributes

id [str] the id of the driver.

class_name [str] the Java class name for the driver.

canonical_name [str] the user-friendly name of the driver.

creator [str] the id of the user who created the driver.

base_names [list of str] a list of the file name(s) of the jar files.

classmethod `list` () → List[datarobot.models.driver.DataDriver]

Returns list of available drivers.

Returns

drivers [list of DataDriver instances] contains a list of available drivers.

Examples

```
>>> import datarobot as dr
>>> drivers = dr.DataDriver.list()
>>> drivers
[DataDriver('mysql'), DataDriver('RedShift'), DataDriver('PostgreSQL')]
```

classmethod `get` (*driver_id: str*) → datarobot.models.driver.DataDriver

Gets the driver.

Parameters

driver_id [str] the identifier of the driver.

Returns

driver [DataDriver] the required driver.

Examples

```
>>> import datarobot as dr
>>> driver = dr.DataDriver.get('5ad08a1889453d0001ea7c5c')
>>> driver
DataDriver('PostgreSQL')
```

classmethod create (*class_name: str, canonical_name: str, files: List[str]*) → `datarobot.models.driver.DataDriver`
Creates the driver. Only available to admin users.

Parameters

- class_name** [str] the Java class name for the driver.
- canonical_name** [str] the user-friendly name of the driver.
- files** [list of str] a list of the file paths on file system file_path(s) for the driver.

Returns

- driver** [DataDriver] the created driver.

Raises

- ClientError** raised if user is not granted for *Can manage JDBC database drivers* feature

Examples

```
>>> import datarobot as dr
>>> driver = dr.DataDriver.create(
...     class_name='org.postgresql.Driver',
...     canonical_name='PostgreSQL',
...     files=['/tmp/postgresql-42.2.2.jar']
... )
>>> driver
DataDriver('PostgreSQL')
```

update (*class_name: Optional[str] = None, canonical_name: Optional[str] = None*) → None
Updates the driver. Only available to admin users.

Parameters

- class_name** [str] the Java class name for the driver.
- canonical_name** [str] the user-friendly name of the driver.

Raises

- ClientError** raised if user is not granted for *Can manage JDBC database drivers* feature

Examples

```
>>> import datarobot as dr
>>> driver = dr.DataDriver.get('5ad08a1889453d0001ea7c5c')
>>> driver.canonical_name
'PostgreSQL'
>>> driver.update(canonical_name='postgres')
>>> driver.canonical_name
'postgres'
```

delete () → None
Removes the driver. Only available to admin users.

Raises

- ClientError** raised if user is not granted for *Can manage JDBC database drivers* feature

```
class datarobot.Connector (id: Optional[str] = None, creator_id: Optional[str] = None, configuration_id: Optional[str] = None, base_name: Optional[str] = None, canonical_name: Optional[str] = None)
```

A connector

Attributes

id [str] the id of the connector.

creator_id [str] the id of the user who created the connector.

base_name [str] the file name of the jar file.

canonical_name [str] the user-friendly name of the connector.

configuration_id [str] the id of the configuration of the connector.

```
classmethod list () → List[datarobot.models.connector.Connector]
```

Returns list of available connectors.

Returns

connectors [list of Connector instances] contains a list of available connectors.

Examples

```
>>> import datarobot as dr
>>> connectors = dr.Connector.list()
>>> connectors
[Connector('ADLS Gen2 Connector'), Connector('S3 Connector')]
```

```
classmethod get (connector_id: str) → datarobot.models.connector.Connector
```

Gets the connector.

Parameters

connector_id [str] the identifier of the connector.

Returns

connector [Connector] the required connector.

Examples

```
>>> import datarobot as dr
>>> connector = dr.Connector.get('5fe1063e1c075e0245071446')
>>> connector
Connector('ADLS Gen2 Connector')
```

```
classmethod create (file_path: str) → datarobot.models.connector.Connector
```

Creates the connector from a jar file. Only available to admin users.

Parameters

file_path [str] the file path on file system file_path(s) for the connector.

Returns

connector [Connector] the created connector.

Raises

ClientError raised if user is not granted for *Can manage connectors* feature

Examples

```
>>> import datarobot as dr
>>> connector = dr.Connector.create('/tmp/connector-adls-gen2.jar')
>>> connector
Connector('ADLS Gen2 Connector')
```

update (*file_path: str*) → datarobot.models.connector.Connector
Updates the connector with new jar file. Only available to admin users.

Parameters

file_path [str] the file path on file system file_path(s) for the connector.

Returns

connector [Connector] the updated connector.

Raises

ClientError raised if user is not granted for *Can manage connectors* feature

Examples

```
>>> import datarobot as dr
>>> connector = dr.Connector.get('5fe1063e1c075e0245071446')
>>> connector.base_name
'connector-adls-gen2.jar'
>>> connector.update('/tmp/connector-s3.jar')
>>> connector.base_name
'connector-s3.jar'
```

delete () → None
Removes the connector. Only available to admin users.

Raises

ClientError raised if user is not granted for *Can manage connectors* feature

class datarobot.DataStore (*data_store_id: Optional[str] = None, data_store_type: Optional[str] = None, canonical_name: Optional[str] = None, creator: Optional[str] = None, updated: Optional[datetime.datetime] = None, params: Optional[datarobot.models.data_store.DataStoreParameters] = None, role: Optional[str] = None*)

A data store. Represents database

Attributes

id [str] The id of the data store.

data_store_type [str] The type of data store.

canonical_name [str] The user-friendly name of the data store.

creator [str] The id of the user who created the data store.

updated [datetime.datetime] The time of the last update

params [DataStoreParameters] A list specifying data store parameters.

role [str] Your access role for this data store.

classmethod list () → List[datarobot.models.data_store.DataStore]
Returns list of available data stores.

Returns

data_stores [list of DataStore instances] contains a list of available data stores.

Examples

```
>>> import datarobot as dr
>>> data_stores = dr.DataStore.list()
>>> data_stores
[DataStore('Demo'), DataStore('Airlines')]
```

classmethod get (data_store_id: str) → datarobot.models.data_store.DataStore
Gets the data store.

Parameters

data_store_id [str] the identifier of the data store.

Returns

data_store [DataStore] the required data store.

Examples

```
>>> import datarobot as dr
>>> data_store = dr.DataStore.get('5a8ac90b07a57a0001be501e')
>>> data_store
DataStore('Demo')
```

classmethod create (data_store_type: str, canonical_name: str, driver_id: str, jdbc_url: str) → datarobot.models.data_store.DataStore
Creates the data store.

Parameters

data_store_type [str] the type of data store.

canonical_name [str] the user-friendly name of the data store.

driver_id [str] the identifier of the DataDriver.

jdbc_url [str] the full JDBC url, for example `jdbc:postgresql://my.dbaddress.org:5432/my_db`.

Returns

data_store [DataStore] the created data store.

Examples

```
>>> import datarobot as dr
>>> data_store = dr.DataStore.create(
...     data_store_type='jdbc',
...     canonical_name='Demo DB',
```

(continues on next page)

(continued from previous page)

```

...     driver_id='5a6af02eb15372000117c040',
...     jdbc_url='jdbc:postgresql://my.db.address.org:5432/perftest'
... )
>>> data_store
DataStore('Demo DB')

```

update (*canonical_name: Optional[str] = None, driver_id: Optional[str] = None, jdbc_url: Optional[str] = None*) → None
Updates the data store.

Parameters

canonical_name [str] optional, the user-friendly name of the data store.

driver_id [str] optional, the identifier of the DataDriver.

jdbc_url [str] optional, the full JDBC url, for example
jdbc:postgresql://my.dbaddress.org:5432/my_db.

Examples

```

>>> import datarobot as dr
>>> data_store = dr.DataStore.get('5ad5d2afef5cd700014d3cae')
>>> data_store
DataStore('Demo DB')
>>> data_store.update(canonical_name='Demo DB updated')
>>> data_store
DataStore('Demo DB updated')

```

delete () → None

Removes the DataStore

test (*username: str, password: str*) → TestResponse

Tests database connection.

Parameters

username [str] the username for database authentication.

password [str] the password for database authentication. The password is encrypted at server side and never saved / stored

Returns

message [dict] message with status.

Examples

```

>>> import datarobot as dr
>>> data_store = dr.DataStore.get('5ad5d2afef5cd700014d3cae')
>>> data_store.test(username='db_username', password='db_password')
{'message': 'Connection successful'}

```

schemas (*username: str, password: str*) → SchemasResponse

Returns list of available schemas.

Parameters

username [str] the username for database authentication.

password [str] the password for database authentication. The password is encrypted at server side and never saved / stored

Returns

response [dict] dict with database name and list of str - available schemas

Examples

```
>>> import datarobot as dr
>>> data_store = dr.DataStore.get('5ad5d2afef5cd700014d3cae')
>>> data_store.schemas(username='db_username', password='db_password')
{'catalog': 'perftest', 'schemas': ['demo', 'information_schema', 'public']}
```

tables (*username: str, password: str, schema: Optional[str] = None*) → TablesResponse
Returns list of available tables in schema.

Parameters

username [str] optional, the username for database authentication.

password [str] optional, the password for database authentication. The password is encrypted at server side and never saved / stored

schema [str] optional, the schema name.

Returns

response [dict] dict with catalog name and tables info

Examples

```
>>> import datarobot as dr
>>> data_store = dr.DataStore.get('5ad5d2afef5cd700014d3cae')
>>> data_store.tables(username='db_username', password='db_password', schema=
↪ 'demo')
{'tables': [{'type': 'TABLE', 'name': 'diagnosis', 'schema': 'demo'}, {'type':
↪ 'TABLE',
'name': 'kickcars', 'schema': 'demo'}, {'type': 'TABLE', 'name': 'patient',
'schema': 'demo'}, {'type': 'TABLE', 'name': 'transcript', 'schema': 'demo'}],
'catalog': 'perftest'}
```

classmethod from_server_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]],*
keep_attrs: Optional[List[str]] = None) →
datarobot.models.data_store.DataStore

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

get_access_list () → List[datarobot.models.sharing.SharingAccess]
Retrieve what users have access to this data store

New in version v2.14.

Returns

list of [class:SharingAccess <datarobot.SharingAccess>]

share (access_list: List[datarobot.models.sharing.SharingAccess]) → None
Modify the ability of users to access this data store

New in version v2.14.

Parameters

access_list [list of *SharingAccess*] the modifications to make.

Raises

datarobot.ClientError [] if you do not have permission to share this data store, if the user you're sharing with doesn't exist, if the same user appears multiple times in the access_list, or if these changes would leave the data store without an owner.

Examples

Transfer access to the data store from `old_user@datarobot.com` to `new_user@datarobot.com`

```
import datarobot as dr

new_access = dr.SharingAccess(new_user@datarobot.com,
                              dr.enums.SHARING_ROLE.OWNER, can_share=True)
access_list = [dr.SharingAccess(old_user@datarobot.com, None), new_access]

dr.DataStore.get('my-data-store-id').share(access_list)
```

```
class datarobot.DataSource (data_source_id: Optional[str] = None, data_source_type:
                            Optional[str] = None, canonical_name: Optional[str]
                            = None, creator: Optional[str] = None, updated:
                            Optional[datetime.datetime] = None, params: Op-
                            tional[datarobot.models.data_source.DataSourceParameters] =
                            None, role: Optional[str] = None)
```

A data source. Represents data request

Attributes

id [str] the id of the data source.

type [str] the type of data source.

canonical_name [str] the user-friendly name of the data source.

creator [str] the id of the user who created the data source.

updated [datetime.datetime] the time of the last update.

params [DataSourceParameters] a list specifying data source parameters.

role [str or None] if a string, represents a particular level of access and should be one of `datarobot.enums.SHARING_ROLE`. For more information on the specific access levels, see the *sharing* documentation. If None, can be passed to a *share* function to revoke access for a specific user.

classmethod `list()` → List[datarobot.models.data_source.DataSource]
Returns list of available data sources.

Returns

data_sources [list of DataSource instances] contains a list of available data sources.

Examples

```
>>> import datarobot as dr
>>> data_sources = dr.DataSource.list()
>>> data_sources
[DataSource('Diagnostics'), DataSource('Airlines 100mb'), DataSource(
↳ 'Airlines 10mb')]
```

classmethod `get(data_source_id: str)` → TDataSource
Gets the data source.

Parameters

data_source_id [str] the identifier of the data source.

Returns

data_source [DataSource] the requested data source.

Examples

```
>>> import datarobot as dr
>>> data_source = dr.DataSource.get('5a8ac9ab07a57a0001be501f')
>>> data_source
DataSource('Diagnostics')
```

classmethod `create(data_source_type: str, canonical_name: str, params: datarobot.models.data_source.DataSourceParameters)` → TDataSource
Creates the data source.

Parameters

data_source_type [str] the type of data source.

canonical_name [str] the user-friendly name of the data source.

params [DataSourceParameters] a list specifying data source parameters.

Returns

data_source [DataSource] the created data source.

Examples

```
>>> import datarobot as dr
>>> params = dr.DataSourceParameters(
...     data_store_id='5a8ac90b07a57a0001be501e',
...     query='SELECT * FROM airlines10mb WHERE "Year" >= 1995;'
... )
>>> data_source = dr.DataSource.create(
...     data_source_type='jdbc',
```

(continues on next page)

(continued from previous page)

```

...     canonical_name='airlines stats after 1995',
...     params=params
... )
>>> data_source
DataSource('airlines stats after 1995')

```

update (*canonical_name*: *Optional[str]* = *None*, *params*: *Optional[datarobot.models.data_source.DataSourceParameters]* = *None*) → *None*
Creates the data source.

Parameters

canonical_name [str] optional, the user-friendly name of the data source.

params [DataSourceParameters] optional, the identifier of the DataDriver.

Examples

```

>>> import datarobot as dr
>>> data_source = dr.DataSource.get('5ad840cc613b480001570953')
>>> data_source
DataSource('airlines stats after 1995')
>>> params = dr.DataSourceParameters(
...     query='SELECT * FROM airlines10mb WHERE "Year" >= 1990;'
... )
>>> data_source.update(
...     canonical_name='airlines stats after 1990',
...     params=params
... )
>>> data_source
DataSource('airlines stats after 1990')

```

delete () → *None*

Removes the DataSource

classmethod from_server_data (*data*: *ServerDataType*, *keep_attrs*: *Optional[Iterable[str]]* = *None*) → *TDataSource*

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

get_access_list () → *List[datarobot.models.sharing.SharingAccess]*

Retrieve what users have access to this data source

New in version v2.14.

Returns

list of [class:*SharingAccess* <*datarobot.SharingAccess*>]

share (*access_list*: *List[datarobot.models.sharing.SharingAccess]*) → *None*

Modify the ability of users to access this data source

New in version v2.14.

Parameters

access_list: list of [class:SharingAccess <datarobot.SharingAccess>] The modifications to make.

Raises

datarobot.ClientError: If you do not have permission to share this data source, if the user you're sharing with doesn't exist, if the same user appears multiple times in the access_list, or if these changes would leave the data source without an owner.

Examples

Transfer access to the data source from old_user@datarobot.com to new_user@datarobot.com

```
from datarobot.enums import SHARING_ROLE
from datarobot.models.data_source import DataSource
from datarobot.models.sharing import SharingAccess

new_access = SharingAccess(
    "new_user@datarobot.com",
    SHARING_ROLE.OWNER,
    can_share=True,
)
access_list = [
    SharingAccess("old_user@datarobot.com", SHARING_ROLE.OWNER, can_
↪share=True),
    new_access,
]

DataSource.get('my-data-source-id').share(access_list)
```

create_dataset (*username: Optional[str] = None, password: Optional[str] = None, do_snapshot: Optional[bool] = None, persist_data_after_ingestion: Optional[bool] = None, categories: Optional[List[str]] = None, credential_id: Optional[str] = None, use_kerberos: Optional[bool] = None*) → datarobot.models.dataset.Dataset

Create a *Dataset* from this data source.

New in version v2.22.

Parameters

username: string, optional The username for database authentication.

password: string, optional The password (in cleartext) for database authentication. The password will be encrypted on the server side in scope of HTTP request and never saved or stored.

do_snapshot: bool, optional If unset, uses the server default: True. If true, creates a snapshot dataset; if false, creates a remote dataset. Creating snapshots from non-file sources requires an additional permission, *Enable Create Snapshot Data Source*.

persist_data_after_ingestion: bool, optional If unset, uses the server default: True. If true, will enforce saving all data (for download and sampling) and will allow a user to view extended data profile (which includes data statistics like min/max/median/mean, histogram, etc.). If false, will not enforce saving data. The data schema (feature names and types) still will be available. Specifying this parameter to false and *doSnapshot* to true will result in an error.

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

credential_id: string, optional The ID of the set of credentials to use instead of user and password. Note that with this change, username and password will become optional.

use_kerberos: bool, optional If unset, uses the server default: False. If true, use kerberos authentication for database authentication.

Returns

response: Dataset The Dataset created from the uploaded data

```
class datarobot.DataSourceParameters (data_store_id: Optional[str] = None, table: Optional[str] = None, schema: Optional[str] = None, partition_column: Optional[str] = None, query: Optional[str] = None, fetch_size: Optional[int] = None)
```

Data request configuration

Attributes

data_store_id [str] the id of the DataStore.

table [str] optional, the name of specified database table.

schema [str] optional, the name of the schema associated with the table.

partition_column [str] optional, the name of the partition column.

query [str] optional, the user specified SQL query.

fetch_size [int] optional, a user specified fetch size in the range [1, 20000]. By default a fetch-size will be assigned to balance throughput and memory usage

2.3.16 Datasets

```
class datarobot.models.Dataset (dataset_id: str, version_id: str, name: str, categories: List[str], created_at: str, is_data_engine_eligible: bool, is_latest_version: bool, is_snapshot: bool, processing_state: str, created_by: Optional[str] = None, data_persisted: Optional[bool] = None, size: Optional[int] = None, row_count: Optional[int] = None)
```

Represents a Dataset returned from the `api/v2/datasets/` endpoints.

Attributes

id: string The ID of this dataset

name: string The name of this dataset in the catalog

is_latest_version: bool Whether this dataset version is the latest version of this dataset

version_id: string The object ID of the catalog_version the dataset belongs to

categories: list(string) An array of strings describing the intended use of the dataset. The supported options are `TRAINING` and `PREDICTION`.

created_at: string The date when the dataset was created

created_by: string, optional Username of the user who created the dataset

is_snapshot: bool Whether the dataset version is an immutable snapshot of data which has previously been retrieved and saved to Data_robot

data_persisted: bool, optional If true, user is allowed to view extended data profile (which includes data statistics like min/max/median/mean, histogram, etc.) and download data. If false, download is not allowed and only the data schema (feature names and types) will be available.

is_data_engine_eligible: bool Whether this dataset can be a data source of a data engine query.

processing_state: string Current ingestion process state of the dataset

row_count: int, optional The number of rows in the dataset.

size: int, optional The size of the dataset as a CSV in bytes.

get_uri () → str

Returns

url [str] Permanent static hyperlink to this dataset in AI Catalog.

classmethod upload (*source: Union[str, pandas.core.frame.DataFrame, io.IOBase]*) → TDataset
This method covers Dataset creation from local materials (file & DataFrame) and a URL.

Parameters

source: str, pd.DataFrame or file object Pass a URL, filepath, file or DataFrame to create and return a Dataset.

Returns

response: Dataset The Dataset created from the uploaded data source.

Raises

InvalidUsageError If the source parameter cannot be determined to be a URL, filepath, file or DataFrame.

Examples

```
# Upload a local file
dataset_one = Dataset.upload("./data/examples.csv")

# Create a dataset via URL
dataset_two = Dataset.upload(
    "https://raw.githubusercontent.com/curran/data/gh-pages/dbpedia/cities/
↪data.csv"
)

# Create dataset with a pandas Dataframe
dataset_three = Dataset.upload(my_df)

# Create dataset using a local file
with open("./data/examples.csv", "rb") as file_pointer:
    dataset_four = Dataset.create_from_file(filelike=file_pointer)
```

classmethod create_from_file (*file_path: Optional[str] = None, filelike: Optional[io.IOBase] = None, categories: Optional[List[str]] = None, read_timeout: int = 600, max_wait: int = 600*) → TDataset

A blocking call that creates a new Dataset from a file. Returns when the dataset has been successfully uploaded and processed.

Warning: This function does not clean up its open files. If you pass a filelike, you are responsible for closing it. If you pass a file_path, this will create a file object from the file_path but will not close it.

Parameters

file_path: string, optional The path to the file. This will create a file object pointing to that file but will not close it.

filelike: file, optional An open and readable file object.

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

read_timeout: int, optional The maximum number of seconds to wait for the server to respond indicating that the initial upload is complete

max_wait: int, optional Time in seconds after which dataset creation is considered unsuccessful

Returns

response: Dataset A fully armed and operational Dataset

```
classmethod create_from_in_memory_data (data_frame: Optional[pandas.core.frame.DataFrame] = None, records: Optional[List[Dict[str, Any]]] = None, categories: Optional[List[str]] = None, read_timeout: int = 600, max_wait: int = 600, fname: Optional[str] = None) → TDataset
```

A blocking call that creates a new Dataset from in-memory data. Returns when the dataset has been successfully uploaded and processed.

The data can be either a pandas DataFrame or a list of dictionaries with identical keys.

Parameters

data_frame: DataFrame, optional The data frame to upload

records: list[dict], optional A list of dictionaries with identical keys to upload

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

read_timeout: int, optional The maximum number of seconds to wait for the server to respond indicating that the initial upload is complete

max_wait: int, optional Time in seconds after which dataset creation is considered unsuccessful

fname: string, optional The file name, `data.csv` by default

Returns

response: Dataset The Dataset created from the uploaded data.

Raises

InvalidUsageError If neither a DataFrame or list of records is passed.

```
classmethod create_from_url (url: str, do_snapshot: Optional[bool] = None, persist_data_after_ingestion: Optional[bool] = None, categories: Optional[List[str]] = None, max_wait: int = 600) → TDataset
```

A blocking call that creates a new Dataset from data stored at a url. Returns when the dataset has been successfully uploaded and processed.

Parameters

url: string The URL to use as the source of data for the dataset being created.

do_snapshot: bool, optional If unset, uses the server default: True. If true, creates a snapshot dataset; if false, creates a remote dataset. Creating snapshots from non-file sources may be disabled by the permission, *Disable AI Catalog Snapshots*.

persist_data_after_ingestion: bool, optional If unset, uses the server default: True. If true, will enforce saving all data (for download and sampling) and will allow a user to view extended data profile (which includes data statistics like min/max/median/mean, histogram, etc.). If false, will not enforce saving data. The data schema (feature names and types) still will be available. Specifying this parameter to false and *doSnapshot* to true will result in an error.

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

max_wait: int, optional Time in seconds after which dataset creation is considered unsuccessful.

Returns

response: Dataset The Dataset created from the uploaded data

```
classmethod create_from_data_source(data_source_id: str, username: Optional[str] = None, password: Optional[str] = None, do_snapshot: Optional[bool] = None, persist_data_after_ingestion: Optional[bool] = None, categories: Optional[List[str]] = None, credential_id: Optional[str] = None, use_kerberos: Optional[bool] = None, credential_data: Optional[Dict[str, str]] = None, max_wait: int = 600) → TDataset
```

A blocking call that creates a new Dataset from data stored at a DataSource. Returns when the dataset has been successfully uploaded and processed.

New in version v2.22.

Parameters

data_source_id: string The ID of the DataSource to use as the source of data.

username: string, optional The username for database authentication.

password: string, optional The password (in cleartext) for database authentication. The password will be encrypted on the server side in scope of HTTP request and never saved or stored.

do_snapshot: bool, optional If unset, uses the server default: True. If true, creates a snapshot dataset; if false, creates a remote dataset. Creating snapshots from non-file sources requires may be disabled by the permission, *Disable AI Catalog Snapshots*.

persist_data_after_ingestion: bool, optional If unset, uses the server default: True. If true, will enforce saving all data (for download and sampling) and will allow a user to view extended data profile (which includes data statistics like min/max/median/mean, histogram, etc.). If false, will not enforce saving data. The data schema (feature names and types) still will be available. Specifying this parameter to false and *doSnapshot* to true will result in an error.

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

credential_id: string, optional The ID of the set of credentials to use instead of user and password. Note that with this change, username and password will become optional.

use_kerberos: bool, optional If unset, uses the server default: False. If true, use kerberos authentication for database authentication.

credential_data: dict, optional The credentials to authenticate with the database, to use instead of user/password or credential ID.

max_wait: int, optional Time in seconds after which project creation is considered unsuccessful.

Returns

response: Dataset The Dataset created from the uploaded data

classmethod create_from_query_generator (*generator_id: str, dataset_id: Optional[str] = None, dataset_version_id: Optional[str] = None, max_wait: int = 600*) → TDataset

A blocking call that creates a new Dataset from the query generator. Returns when the dataset has been successfully processed. If optional parameters are not specified the query is applied to the `dataset_id` and `dataset_version_id` stored in the query generator. If specified they will override the stored `dataset_id/dataset_version_id`, e.g. to prep a prediction dataset.

Parameters

generator_id: str The id of the query generator to use.

dataset_id: str, optional The id of the dataset to apply the query to.

dataset_version_id: str, optional The id of the dataset version to apply the query to. If not specified the latest version associated with `dataset_id` (if specified) is used.

max_wait [int] optional, the maximum number of seconds to wait before giving up.

Returns

response: Dataset The Dataset created from the query generator

classmethod get (*dataset_id: str*) → TDataset
Get information about a dataset.

Parameters

dataset_id [string] the id of the dataset

Returns

dataset [Dataset] the queried dataset

classmethod delete (*dataset_id: str*) → None

Soft deletes a dataset. You cannot get it or list it or do actions with it, except for un-deleting it.

Parameters

dataset_id: string The id of the dataset to mark for deletion

Returns

None

classmethod un_delete (*dataset_id: str*) → None

Un-deletes a previously deleted dataset. If the dataset was not deleted, nothing happens.

Parameters

dataset_id: string The id of the dataset to un-delete

Returns

None

classmethod list (*category: Optional[str] = None, filter_failed: Optional[bool] = None, order_by: Optional[str] = None*) → List[TDataset]

List all datasets a user can view.

Parameters

category: string, optional Optional. If specified, only dataset versions that have the specified category will be included in the results. Categories identify the intended use of the dataset; supported categories are `TRAINING` and `PREDICTION`.

filter_failed: bool, optional If unset, uses the server default: False. Whether datasets that failed during import should be excluded from the results. If True invalid datasets will be excluded.

order_by: string, optional If unset, uses the server default: `created`. Sorting order which will be applied to catalog list, valid options are: `created` – ascending order by creation datetime; `-created` – descending order by creation datetime.

Returns

list[Dataset] a list of datasets the user can view

classmethod iterate (*offset: Optional[int] = None, limit: Optional[int] = None, category: Optional[str] = None, order_by: Optional[str] = None, filter_failed: Optional[bool] = None*) → Generator[TDataset, None, None]

Get an iterator for the requested datasets a user can view. This lazily retrieves results. It does not get the next page from the server until the current page is exhausted.

Parameters

offset: int, optional If set, this many results will be skipped

limit: int, optional Specifies the size of each page retrieved from the server. If unset, uses the server default.

category: string, optional Optional. If specified, only dataset versions that have the specified category will be included in the results. Categories identify the intended use of the dataset; supported categories are `TRAINING` and `PREDICTION`.

filter_failed: bool, optional If unset, uses the server default: False. Whether datasets that failed during import should be excluded from the results. If True invalid datasets will be excluded.

order_by: string, optional If unset, uses the server default: `created`. Sorting order which will be applied to catalog list, valid options are: `created` – ascending order by creation datetime; `-created` – descending order by creation datetime.

Yields

Dataset An iterator of the datasets the user can view

update () → None

Updates the Dataset attributes in place with the latest information from the server.

Returns

None

modify (*name: Optional[str] = None, categories: Optional[List[str]] = None*) → None
 Modifies the Dataset name and/or categories. Updates the object in place.

Parameters

- name: string, optional** The new name of the dataset
- categories: list[string], optional** A list of strings describing the intended use of the dataset. The supported options are `TRAINING` and `PREDICTION`. If any categories were previously specified for the dataset, they will be overwritten.

Returns

None

share (*access_list: List[datarobot.models.sharing.SharingAccess], apply_grant_to_linked_objects: bool = False*) → None
 Modify the ability of users to access this dataset

Parameters

- access_list: list of [class:SharingAccess <datarobot.SharingAccess>]** The modifications to make.
- apply_grant_to_linked_objects: bool** If true for any users being granted access to the dataset, grant the user read access to any linked objects such as DataSources and DataStores that may be used by this dataset. Ignored if no such objects are relevant for dataset, defaults to False.

Raises

- datarobot.ClientError:** If you do not have permission to share this dataset, if the user you're sharing with doesn't exist, if the same user appears multiple times in the `access_list`, or if these changes would leave the dataset without an owner.

Examples

Transfer access to the dataset from `old_user@datarobot.com` to `new_user@datarobot.com`

```
from datarobot.enums import SHARING_ROLE
from datarobot.models.dataset import Dataset
from datarobot.models.sharing import SharingAccess

new_access = SharingAccess(
    "new_user@datarobot.com",
    SHARING_ROLE.OWNER,
    can_share=True,
)
access_list = [
    SharingAccess(
        "old_user@datarobot.com",
        SHARING_ROLE.OWNER,
        can_share=True,
        can_use_data=True,
    ),
    new_access,
]

Dataset.get('my-dataset-id').share(access_list)
```

get_details () → datarobot.models.dataset.DatasetDetails
Gets the details for this Dataset

Returns

DatasetDetails

get_all_features (*order_by: Optional[str] = None*) → List[datarobot.models.feature.DatasetFeature]
Get a list of all the features for this dataset.

Parameters

order_by: string, optional If unset, uses the server default: `name`. How the features should be ordered. Can be `name` or `featureType`.

Returns

list[DatasetFeature]

iterate_all_features (*offset: Optional[int] = None, limit: Optional[int] = None, order_by: Optional[str] = None*) → Generator[datarobot.models.feature.DatasetFeature, None, None]
Get an iterator for the requested features of a dataset. This lazily retrieves results. It does not get the next page from the server until the current page is exhausted.

Parameters

offset: int, optional If set, this many results will be skipped.

limit: int, optional Specifies the size of each page retrieved from the server. If unset, uses the server default.

order_by: string, optional If unset, uses the server default: `name`. How the features should be ordered. Can be `name` or `featureType`.

Yields

DatasetFeature

get_featurelists () → List[datarobot.models.featurelist.DatasetFeaturelist]
Get DatasetFeaturelists created on this Dataset

Returns

feature_lists: list[DatasetFeaturelist]

create_featurelist (*name: str, features: List[str]*) → datarobot.models.featurelist.DatasetFeaturelist
Create a new dataset featurelist

Parameters

name [str] the name of the modeling featurelist to create. Names must be unique within the dataset, or the server will return an error.

features [list of str] the names of the features to include in the dataset featurelist. Each feature must be a dataset feature.

Returns

featurelist [DatasetFeaturelist] the newly created featurelist

Examples

```
dataset = Dataset.get('1234deadbeeffeeddead4321')
dataset_features = dataset.get_all_features()
selected_features = [feat.name for feat in dataset_features][:5] # select_
↳first five
new_flist = dataset.create_featurelist('Simple Features', selected_features)
```

get_file (*file_path: Optional[str] = None, filelike: Optional[io.IOBase] = None*) → None

Retrieves all the originally uploaded data in CSV form. Writes it to either the file or a filelike object that can write bytes.

Only one of `file_path` or `filelike` can be provided and it must be provided as a keyword argument (i.e. `file_path=path-to-write-to`). If a file-like object is provided, the user is responsible for closing it when they are done.

The user must also have permission to download data.

Parameters

file_path: string, optional The destination to write the file to.

filelike: file, optional A file-like object to write to. The object must be able to write bytes. The user is responsible for closing the object

Returns

None

get_as_dataframe () → pandas.core.frame.DataFrame

Retrieves all the originally uploaded data in a pandas DataFrame.

New in version v3.0.

Returns

pd.DataFrame

get_projects () → List[datarobot.models.dataset.ProjectLocation]

Retrieves the Dataset's projects as ProjectLocation named tuples.

Returns

locations: list[ProjectLocation]

create_project (*project_name: Optional[str] = None, user: Optional[str] = None, password: Optional[str] = None, credential_id: Optional[str] = None, use_kerberos: Optional[bool] = None, credential_data: Optional[Dict[str, str]] = None*) → datarobot.models.project.Project

Create a `datarobot.models.Project` from this dataset

Parameters

project_name: string, optional The name of the project to be created. If not specified, will be "Untitled Project" for database connections, otherwise the project name will be based on the file used.

user: string, optional The username for database authentication.

password: string, optional The password (in cleartext) for database authentication. The password will be encrypted on the server side in scope of HTTP request and never saved or stored

credential_id: string, optional The ID of the set of credentials to use instead of user and password.

use_kerberos: bool, optional Server default is False. If true, use kerberos authentication for database authentication.

credential_data: dict, optional The credentials to authenticate with the database, to use instead of user/password or credential ID.

Returns

Project

classmethod create_version_from_file (*dataset_id: str, file_path: Optional[str] = None, filelike: Optional[io.IOBase] = None, categories: Optional[List[str]] = None, read_timeout: int = 600, max_wait: int = 600*) → TDataset

A blocking call that creates a new Dataset version from a file. Returns when the new dataset version has been successfully uploaded and processed.

Warning: This function does not clean up it's open files. If you pass a filelike, you are responsible for closing it. If you pass a file_path, this will create a file object from the file_path but will not close it.

New in version v2.23.

Parameters

dataset_id: string The ID of the dataset for which new version to be created

file_path: string, optional The path to the file. This will create a file object pointing to that file but will not close it.

filelike: file, optional An open and readable file object.

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are "TRAINING" and "PREDICTION".

read_timeout: int, optional The maximum number of seconds to wait for the server to respond indicating that the initial upload is complete

max_wait: int, optional Time in seconds after which project creation is considered unsuccessful

Returns

response: Dataset A fully armed and operational Dataset version

classmethod create_version_from_in_memory_data (*dataset_id: str, data_frame: Optional[pandas.core.frame.DataFrame] = None, records: Optional[List[Dict[str, Any]]] = None, categories: Optional[List[str]] = None, read_timeout: int = 600, max_wait: int = 600*) → TDataset

A blocking call that creates a new Dataset version for a dataset from in-memory data. Returns when the dataset has been successfully uploaded and processed.

The data can be either a pandas DataFrame or a list of dictionaries with identical keys.

New in version v2.23.

Parameters

dataset_id: string The ID of the dataset for which new version to be created

data_frame: DataFrame, optional The data frame to upload

records: list[dict], optional A list of dictionaries with identical keys to upload

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

read_timeout: int, optional The maximum number of seconds to wait for the server to respond indicating that the initial upload is complete

max_wait: int, optional Time in seconds after which project creation is considered unsuccessful

Returns

response: Dataset The Dataset version created from the uploaded data

Raises

InvalidUsageError If neither a DataFrame or list of records is passed.

```
classmethod create_version_from_url (dataset_id: str, url: str, categories: Optional[List[str]] = None, max_wait: int = 600) →
    TDataset
```

A blocking call that creates a new Dataset from data stored at a url for a given dataset. Returns when the dataset has been successfully uploaded and processed.

New in version v2.23.

Parameters

dataset_id: string The ID of the dataset for which new version to be created

url: string The URL to use as the source of data for the dataset being created.

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

max_wait: int, optional Time in seconds after which project creation is considered unsuccessful

Returns

response: Dataset The Dataset version created from the uploaded data

```
classmethod create_version_from_data_source (dataset_id: str, data_source_id: str,
username: Optional[str] = None, password: Optional[str] = None, categories: Optional[List[str]] = None,
credential_id: Optional[str] = None, use_kerberos: Optional[bool] = None, credential_data: Optional[Dict[str, str]] = None, max_wait: int = 600) →
    TDataset
```

A blocking call that creates a new Dataset from data stored at a DataSource. Returns when the dataset has been successfully uploaded and processed.

New in version v2.23.

Parameters

dataset_id: string The ID of the dataset for which new version to be created

data_source_id: string The ID of the DataSource to use as the source of data.

username: string, optional The username for database authentication.

password: string, optional The password (in cleartext) for database authentication. The password will be encrypted on the server side in scope of HTTP request and never saved or stored.

categories: list[string], optional An array of strings describing the intended use of the dataset. The current supported options are `TRAINING` and `PREDICTION`.

credential_id: string, optional The ID of the set of credentials to use instead of user and password. Note that with this change, username and password will become optional.

use_kerberos: bool, optional If unset, uses the server default: False. If true, use kerberos authentication for database authentication.

credential_data: dict, optional The credentials to authenticate with the database, to use instead of user/password or credential ID.

max_wait: int, optional Time in seconds after which project creation is considered unsuccessful

Returns

response: Dataset The Dataset version created from the uploaded data

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T
Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

classmethod from_server_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]], keep_attrs: Optional[Iterable[str]] = None*) → T

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

```
class datarobot.DatasetDetails (dataset_id: str, version_id: str, categories: List[str],
                                created_by: str, created_at: str, data_source_type: str,
                                error: str, is_latest_version: bool, is_snapshot: bool,
                                is_data_engine_eligible: bool, last_modification_date:
                                str, last_modifier_full_name: str, name: str, uri: str,
                                processing_state: str, data_persisted: Optional[bool]
                                = None, data_engine_query_id: Optional[str] = None,
                                data_source_id: Optional[str] = None, description: Op-
                                tional[str] = None, eda1_modification_date: Optional[str]
                                = None, eda1_modifier_full_name: Optional[str] = None,
                                feature_count: Optional[int] = None, feature_count_by_type:
                                Optional[List[datarobot.models.dataset.FeatureTypeCount]] =
                                None, row_count: Optional[int] = None, size: Optional[int] =
                                None, tags: Optional[List[str]] = None)
```

Represents a detailed view of a Dataset. The `to_dataset` method creates a Dataset from this details view.

Attributes

- dataset_id: string** The ID of this dataset
- name: string** The name of this dataset in the catalog
- is_latest_version: bool** Whether this dataset version is the latest version of this dataset
- version_id: string** The object ID of the catalog_version the dataset belongs to
- categories: list(string)** An array of strings describing the intended use of the dataset. The supported options are `TRAINING` and `PREDICTION`.
- created_at: string** The date when the dataset was created
- created_by: string** Username of the user who created the dataset
- is_snapshot: bool** Whether the dataset version is an immutable snapshot of data which has previously been retrieved and saved to Data_robot
- data_persisted: bool, optional** If true, user is allowed to view extended data profile (which includes data statistics like min/max/median/mean, histogram, etc.) and download data. If false, download is not allowed and only the data schema (feature names and types) will be available.
- is_data_engine_eligible: bool** Whether this dataset can be a data source of a data engine query.
- processing_state: string** Current ingestion process state of the dataset
- row_count: int, optional** The number of rows in the dataset.
- size: int, optional** The size of the dataset as a CSV in bytes.
- data_engine_query_id: string, optional** ID of the source data engine query
- data_source_id: string, optional** ID of the datasource used as the source of the dataset
- data_source_type: string** the type of the datasource that was used as the source of the dataset
- description: string, optional** the description of the dataset
- eda1_modification_date: string, optional** the ISO 8601 formatted date and time when the EDA1 for the dataset was updated
- eda1_modifier_full_name: string, optional** the user who was the last to update EDA1 for the dataset
- error: string** details of exception raised during ingestion process, if any

feature_count: **int, optional** total number of features in the dataset

feature_count_by_type: **list[FeatureTypeCount]** number of features in the dataset grouped by feature type

last_modification_date: **string** the ISO 8601 formatted date and time when the dataset was last modified

last_modifier_full_name: **string** full name of user who was the last to modify the dataset

tags: **list[string]** list of tags attached to the item

uri: **string** the uri to datasource like: - `file_name.csv` - `jdbc:DATA_SOURCE_GIVEN_NAME/SCHEMA.TABLE_NAME` - `jdbc:DATA_SOURCE_GIVEN_NAME/<query>` - for *query* based datasources - `https://s3.amazonaws.com/datarobot_test/kickcars-sample-200.csv` - etc.

classmethod **get** (*dataset_id: str*) → `TDatasetDetails`
Get details for a Dataset from the server

Parameters

dataset_id: **str** The id for the Dataset from which to get details

Returns

DatasetDetails

to_dataset () → `datarobot.models.dataset.Dataset`
Build a Dataset object from the information in this object

Returns

Dataset

2.3.17 Data Engine Query Generator

class `datarobot.DataEngineQueryGenerator` (***generator_kwargs*)
`DataEngineQueryGenerator` is used to set up time series data prep.

New in version v2.27.

Attributes

id: **str** id of the query generator

query: **str** text of the generated Spark SQL query

datasets: **list(QueryGeneratorDataset)** datasets associated with the query generator

generator_settings: **QueryGeneratorSettings** the settings used to define the query

generator_type: **str** `TimeSeries` is the only supported type

classmethod **create** (*generator_type, datasets, generator_settings*)
Creates a query generator entity.

New in version v2.27.

Parameters

generator_type [str] Type of data engine query generator

datasets [List[QueryGeneratorDataset]] Source datasets in the Data Engine workspace.

generator_settings [dict] Data engine generator settings of the given *generator_type*.

Returns

query_generator [DataEngineQueryGenerator] The created generator

Examples

```
import datarobot as dr
from datarobot.models.data_engine_query_generator import (
    QueryGeneratorDataset,
    QueryGeneratorSettings,
)
dataset = QueryGeneratorDataset(
    alias='My_Awesome_Dataset_csv',
    dataset_id='61093144cabd630828bca321',
    dataset_version_id=1,
)
settings = QueryGeneratorSettings(
    datetime_partition_column='date',
    time_unit='DAY',
    time_step=1,
    default_numeric_aggregation_method='sum',
    default_categorical_aggregation_method='mostFrequent',
)
g = dr.DataEngineQueryGenerator.create(
    generator_type='TimeSeries',
    datasets=[dataset],
    generator_settings=settings,
)
g.id
>>>'54e639a18bd88f08078ca831'
g.generator_type
>>>'TimeSeries'
```

classmethod `get(generator_id)`

Gets information about a query generator.

Parameters

generator_id [str] The identifier of the query generator you want to load.

Returns

query_generator [DataEngineQueryGenerator] The queried generator

Examples

```
import datarobot as dr
g = dr.DataEngineQueryGenerator.get(generator_id='54e639a18bd88f08078ca831')
g.id
>>>'54e639a18bd88f08078ca831'
g.generator_type
>>>'TimeSeries'
```

create_dataset (*dataset_id=None, dataset_version_id=None, max_wait=600*)

A blocking call that creates a new Dataset from the query generator. Returns when the dataset has been successfully processed. If optional parameters are not specified the query is applied to the

`dataset_id` and `dataset_version_id` stored in the query generator. If specified they will override the stored `dataset_id/dataset_version_id`, i.e. to prep a prediction dataset.

Parameters

dataset_id: str, optional The id of the unprepped dataset to apply the query to

dataset_version_id: str, optional The `version_id` of the unprepped dataset to apply the query to

Returns

response: Dataset The Dataset created from the query generator

prepare_prediction_dataset_from_catalog (*project_id: str, dataset_id: str, dataset_version_id: Optional[str] = None, max_wait: Optional[int] = 600, relax_known_in_advance_features_check: Optional[bool] = None*) → `datarobot.models.prediction_dataset.PredictionDataset`

Apply time series data prep to a catalog dataset and upload it to the project as a PredictionDataset.

New in version v3.1.

Parameters

project_id [str] The id of the project to which you upload the prediction dataset.

dataset_id [str] The identifier of the dataset.

dataset_version_id [str, optional] The version id of the dataset to use.

max_wait [int, optional] Optional, the maximum number of seconds to wait before giving up.

relax_known_in_advance_features_check [bool, optional] For time series projects only. If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

Returns

dataset [PredictionDataset] The newly uploaded dataset.

prepare_prediction_dataset (*sourcedata: Union[str, pandas.core.frame.DataFrame, io.IOBase], project_id: str, max_wait: Optional[int] = 600, relax_known_in_advance_features_check: Optional[bool] = None*) → `datarobot.models.prediction_dataset.PredictionDataset`

Apply time series data prep and upload the PredictionDataset to the project.

New in version v3.1.

Parameters

sourcedata [str, file or `pandas.DataFrame`] Data to be used for predictions. If it is a string, it can be either a path to a local file, or raw file content. If using a file on disk, the filename must consist of ASCII characters only.

project_id [str] The id of the project to which you upload the prediction dataset.

max_wait [int, optional] The maximum number of seconds to wait for the uploaded dataset to be processed before raising an error.

relax_known_in_advance_features_check [bool, optional] For time series projects only. If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

Returns**dataset**

[PredictionDataset] The newly uploaded dataset.

Raises**InputNotUnderstoodError** Raised if `sourcedata` isn't one of supported types.**AsyncFailureError** Raised if polling for the status of an async process resulted in a response with an unsupported status code.**AsyncProcessUnsuccessfulError** Raised if project creation was unsuccessful (i.e. the server reported an error in uploading the dataset).**AsyncTimeoutError** Raised if processing the uploaded dataset took more time than specified by the `max_wait` parameter.

2.3.18 Datetime Trend Plots

```
class datarobot.models.datetime_trend_plots.AccuracyOverTimePlotsMetadata(project_id,
                                                                    model_id,
                                                                    fore-
                                                                    cast_distance,
                                                                    res-
                                                                    o-
                                                                    lu-
                                                                    tions,
                                                                    back-
                                                                    test_metadata,
                                                                    hold-
                                                                    out_metadata,
                                                                    back-
                                                                    test_statuses,
                                                                    hold-
                                                                    out_statuses)
```

Accuracy over Time metadata for datetime model.

New in version v2.25.

Notes

Backtest/holdout status is a dict containing the following:

- **training:** string Status backtest/holdout training. One of `datarobot.enums.DATETIME_TREND_PLOTS_STATUS`
- **validation:** string Status backtest/holdout validation. One of `datarobot.enums.DATETIME_TREND_PLOTS_STATUS`

Backtest/holdout metadata is a dict containing the following:

- **training:** dict Start and end dates for the backtest/holdout training.
- **validation:** dict Start and end dates for the backtest/holdout validation.

Each dict in the *training* and *validation* in backtest/holdout metadata is structured like:

- **start_date: datetime.datetime or None** The datetime of the start of the chart data (inclusive). None if chart data is not computed.
- **end_date: datetime.datetime or None** The datetime of the end of the chart data (exclusive). None if chart data is not computed.

Attributes

project_id: string The project ID.

model_id: string The model ID.

forecast_distance: int or None The forecast distance for which the metadata was retrieved. None for OTV projects.

resolutions: list of string A list of `datarobot.enums.DATETIME_TREND_PLOTS_RESOLUTION`, which represents available time resolutions for which plots can be retrieved.

backtest_metadata: list of dict List of backtest metadata dicts. The list index of metadata dict is the backtest index. See backtest/holdout metadata info in *Notes* for more details.

holdout_metadata: dict Holdout metadata dict. See backtest/holdout metadata info in *Notes* for more details.

backtest_statuses: list of dict List of backtest statuses dict. The list index of status dict is the backtest index. See backtest/holdout status info in *Notes* for more details.

holdout_statuses: dict Holdout status dict. See backtest/holdout status info in *Notes* for more details.

```
class datarobot.models.datetime_trend_plots.AccuracyOverTimePlot (project_id,  
model_id,  
start_date,  
end_date,  
resolution,  
bins, statistics, calendar_events)
```

Accuracy over Time plot for datetime model.

New in version v2.25.

Notes

Bin is a dict containing the following:

- **start_date: datetime.datetime** The datetime of the start of the bin (inclusive).
- **end_date: datetime.datetime** The datetime of the end of the bin (exclusive).
- **actual: float or None** Average actual value of the target in the bin. None if there are no entries in the bin.
- **predicted: float or None** Average prediction of the model in the bin. None if there are no entries in the bin.
- **frequency: int or None** Indicates number of values averaged in bin.

Statistics is a dict containing the following:

- **durbin_watson: float or None** The Durbin-Watson statistic for the chart data. Value is between 0 and 4. Durbin-Watson statistic is a test statistic used to detect the presence of autocorrelation at lag 1 in the residuals (prediction errors) from a regression analysis. More info https://wikipedia.org/wiki/Durbin%E2%80%93Watson_statistic

Calendar event is a dict containing the following:

- **name: string** Name of the calendar event.
- **date: datetime** Date of the calendar event.
- **series_id: string or None** The series ID for the event. If this event does not specify a series ID, then this will be None, indicating that the event applies to all series.

Attributes

project_id: string The project ID.

model_id: string The model ID.

resolution: string The resolution that is used for binning. One of `datarobot.enums.DATETIME_TREND_PLOTS_RESOLUTION`.

start_date: datetime.datetime The datetime of the start of the chart data (inclusive).

end_date: datetime.datetime The datetime of the end of the chart data (exclusive).

bins: list of dict List of plot bins. See bin info in *Notes* for more details.

statistics: dict Statistics for plot. See statistics info in *Notes* for more details.

calendar_events: list of dict List of calendar events for the plot. See calendar events info in *Notes* for more details.

```
class datarobot.models.datetime_trend_plots.AccuracyOverTimePlotPreview (project_id,
                                                                    model_id,
                                                                    start_date,
                                                                    end_date,
                                                                    bins)
```

Accuracy over Time plot preview for datetime model.

New in version v2.25.

Notes

Bin is a dict containing the following:

- **start_date: datetime.datetime** The datetime of the start of the bin (inclusive).
- **end_date: datetime.datetime** The datetime of the end of the bin (exclusive).
- **actual: float or None** Average actual value of the target in the bin. None if there are no entries in the bin.
- **predicted: float or None** Average prediction of the model in the bin. None if there are no entries in the bin.

Attributes

project_id: string The project ID.

model_id: string The model ID.

start_date: datetime.datetime The datetime of the start of the chart data (inclusive).

end_date: datetime.datetime The datetime of the end of the chart data (exclusive).

bins: list of dict List of plot bins. See bin info in *Notes* for more details.

class `datarobot.models.datetime_trend_plots.ForecastVsActualPlotsMetadata` (*project_id, model_id, resolutions, backtest_metadata, holdout_metadata, backtest_statuses, holdout_statuses*)

Forecast vs Actual plots metadata for datetime model.

New in version v2.25.

Notes

Backtest/holdout status is a dict containing the following:

- **training: dict** Dict containing each of `datarobot.enums.DATETIME_TREND_PLOTS_STATUS` as dict key, and list of forecast distances for particular status as dict value.
- **validation: dict** Dict containing each of `datarobot.enums.DATETIME_TREND_PLOTS_STATUS` as dict key, and list of forecast distances for particular status as dict value.

Backtest/holdout metadata is a dict containing the following:

- **training: dict** Start and end dates for the backtest/holdout training.
- **validation: dict** Start and end dates for the backtest/holdout validation.

Each dict in the *training* and *validation* in backtest/holdout metadata is structured like:

- **start_date: datetime.datetime or None** The datetime of the start of the chart data (inclusive). None if chart data is not computed.
- **end_date: datetime.datetime or None** The datetime of the end of the chart data (exclusive). None if chart data is not computed.

Attributes

project_id: string The project ID.

model_id: string The model ID.

resolutions: list of string A list of `datarobot.enums.DATETIME_TREND_PLOTS_RESOLUTION`, which represents available time resolutions for which plots can be retrieved.

backtest_metadata: list of dict List of backtest metadata dicts. The list index of metadata dict is the backtest index. See backtest/holdout metadata info in *Notes* for more details.

holdout_metadata: dict Holdout metadata dict. See backtest/holdout metadata info in *Notes* for more details.

backtest_statuses: list of dict List of backtest statuses dict. The list index of status dict is the backtest index. See backtest/holdout status info in *Notes* for more details.

holdout_statuses: dict Holdout status dict. See backtest/holdout status info in *Notes* for more details.

```
class datarobot.models.datetime_trend_plots.ForecastVsActualPlot (project_id,
                                                                model_id,
                                                                fore-
                                                                cast_distances,
                                                                start_date,
                                                                end_date,
                                                                resolution,
                                                                bins, calen-
                                                                dar_events)
```

Forecast vs Actual plot for datetime model.

New in version v2.25.

Notes

Bin is a dict containing the following:

- **start_date: datetime.datetime** The datetime of the start of the bin (inclusive).
- **end_date: datetime.datetime** The datetime of the end of the bin (exclusive).
- **actual: float or None** Average actual value of the target in the bin. None if there are no entries in the bin.
- **forecasts: list of float** A list of average forecasts for the model for each forecast distance. Empty if there are no forecasts in the bin. Each index in the *forecasts* list maps to *forecastDistances* list index.
- **error: float or None** Average absolute residual value of the bin. None if there are no entries in the bin.
- **normalized_error: float or None** Normalized average absolute residual value of the bin. None if there are no entries in the bin.
- **frequency: int or None** Indicates number of values averaged in bin.

Calendar event is a dict containing the following:

- **name: string** Name of the calendar event.
- **date: datetime** Date of the calendar event.
- **series_id: string or None** The series ID for the event. If this event does not specify a series ID, then this will be None, indicating that the event applies to all series.

Attributes

project_id: string The project ID.

model_id: string The model ID.

forecast_distances: list of int A list of forecast distances that were retrieved.

resolution: string The resolution that is used for binning. One of `datarobot.enums.DATETIME_TREND_PLOTS_RESOLUTION`

start_date: datetime.datetime The datetime of the start of the chart data (inclusive).

end_date: datetime.datetime The datetime of the end of the chart data (exclusive).

bins: list of dict List of plot bins. See bin info in *Notes* for more details.

calendar_events: list of dict List of calendar events for the plot. See calendar events info in *Notes* for more details.

```
class datarobot.models.datetime_trend_plots.ForecastVsActualPlotPreview(project_id,  
model_id,  
start_date,  
end_date,  
bins)
```

Forecast vs Actual plot preview for datetime model.

New in version v2.25.

Notes

Bin is a dict containing the following:

- **start_date: datetime.datetime** The datetime of the start of the bin (inclusive).
- **end_date: datetime.datetime** The datetime of the end of the bin (exclusive).
- **actual: float or None** Average actual value of the target in the bin. None if there are no entries in the bin.
- **predicted: float or None** Average prediction of the model in the bin. None if there are no entries in the bin.

Attributes

project_id: string The project ID.

model_id: string The model ID.

start_date: datetime.datetime The datetime of the start of the chart data (inclusive).

end_date: datetime.datetime The datetime of the end of the chart data (exclusive).

bins: list of dict List of plot bins. See bin info in *Notes* for more details.

```
class datarobot.models.datetime_trend_plots.AnomalyOverTimePlotsMetadata(project_id,  
model_id,  
res-  
o-  
lu-  
tions,  
back-  
test_metadata,  
hold-  
out_metadata,  
back-  
test_statuses,  
hold-  
out_statuses)
```

Anomaly over Time metadata for datetime model.

New in version v2.25.

Notes

Backtest/holdout status is a dict containing the following:

- **training:** `string` Status backtest/holdout training. One of `datarobot.enums.DATETIME_TREND_PLOTS_STATUS`
- **validation:** `string` Status backtest/holdout validation. One of `datarobot.enums.DATETIME_TREND_PLOTS_STATUS`

Backtest/holdout metadata is a dict containing the following:

- **training:** `dict` Start and end dates for the backtest/holdout training.
- **validation:** `dict` Start and end dates for the backtest/holdout validation.

Each dict in the *training* and *validation* in backtest/holdout metadata is structured like:

- **start_date:** `datetime.datetime` or `None` The datetime of the start of the chart data (inclusive). `None` if chart data is not computed.
- **end_date:** `datetime.datetime` or `None` The datetime of the end of the chart data (exclusive). `None` if chart data is not computed.

Attributes

project_id: `string` The project ID.

model_id: `string` The model ID.

resolutions: `list of string` A list of `datarobot.enums.DATETIME_TREND_PLOTS_RESOLUTION`, which represents available time resolutions for which plots can be retrieved.

backtest_metadata: `list of dict` List of backtest metadata dicts. The list index of metadata dict is the backtest index. See backtest/holdout metadata info in *Notes* for more details.

holdout_metadata: `dict` Holdout metadata dict. See backtest/holdout metadata info in *Notes* for more details.

backtest_statuses: `list of dict` List of backtest statuses dict. The list index of status dict is the backtest index. See backtest/holdout status info in *Notes* for more details.

holdout_statuses: `dict` Holdout status dict. See backtest/holdout status info in *Notes* for more details.

```
class datarobot.models.datetime_trend_plots.AnomalyOverTimePlot (project_id,
model_id,
start_date,
end_date,
resolution,
bins, calendar_events)
```

Anomaly over Time plot for datetime model.

New in version v2.25.

Notes

Bin is a dict containing the following:

- **start_date:** `datetime.datetime` The datetime of the start of the bin (inclusive).

- **end_date: datetime.datetime** The datetime of the end of the bin (exclusive).
- **predicted: float or None** Average prediction of the model in the bin. None if there are no entries in the bin.
- **frequency: int or None** Indicates number of values averaged in bin.

Calendar event is a dict containing the following:

- **name: string** Name of the calendar event.
- **date: datetime** Date of the calendar event.
- **series_id: string or None** The series ID for the event. If this event does not specify a series ID, then this will be None, indicating that the event applies to all series.

Attributes

project_id: string The project ID.

model_id: string The model ID.

resolution: string The resolution that is used for binning. One of `datarobot.enums.DATETIME_TREND_PLOTS_RESOLUTION`.

start_date: datetime.datetime The datetime of the start of the chart data (inclusive).

end_date: datetime.datetime The datetime of the end of the chart data (exclusive).

bins: list of dict List of plot bins. See bin info in *Notes* for more details.

calendar_events: list of dict List of calendar events for the plot. See calendar events info in *Notes* for more details.

```
class datarobot.models.datetime_trend_plots.AnomalyOverTimePlotPreview(project_id,  
model_id,  
pre-  
dic-  
tion_threshold,  
start_date,  
end_date,  
bins)
```

Anomaly over Time plot preview for datetime model.

New in version v2.25.

Notes

Bin is a dict containing the following:

- **start_date: datetime.datetime** The datetime of the start of the bin (inclusive).
- **end_date: datetime.datetime** The datetime of the end of the bin (exclusive).

Attributes

project_id: string The project ID.

model_id: string The model ID.

prediction_threshold: float Only bins with predictions exceeding this threshold are returned in the response.

start_date: datetime.datetime The datetime of the start of the chart data (inclusive).

end_date: datetime.datetime The datetime of the end of the chart data (exclusive).

bins: list of dict List of plot bins. See bin info in *Notes* for more details.

2.3.19 Deployment

```
class datarobot.models.Deployment (id: str, label: Optional[str] = None, description:
Optional[str] = None, status: Optional[str] = None,
default_prediction_server: Optional[PredictionServer] =
None, model: Optional[ModelDict] = None, capabilities:
Optional[Dict[str, Any]] = None, prediction_usage:
Optional[PredictionUsage] = None, permissions:
Optional[List[str]] = None, service_health: Optional[Health]
= None, model_health: Optional[Health] = None, accuracy_health:
Optional[Health] = None, importance:
Optional[str] = None, fairness_health: Optional[Health]
= None, governance: Optional[Dict[str, Any]] = None,
owners: Optional[Dict[str, Any]] = None, prediction_environment:
Optional[Dict[str, Any]] = None)
```

A deployment created from a DataRobot model.

Attributes

id [str] the id of the deployment

label [str] the label of the deployment

description [str] the description of the deployment

status [str] (New in version v2.29) deployment status

default_prediction_server [dict] Information about the default prediction server for the deployment. Accepts the following values:

- id: str. Prediction server ID.
- url: str, optional. Prediction server URL.
- datarobot-key: str. Corresponds to the PredictionServer's `data_robots_key` parameter that allows you to verify and access the prediction server.

importance [str, optional] deployment importance

model [dict] information on the model of the deployment

capabilities [dict] information on the capabilities of the deployment

prediction_usage [dict] information on the prediction usage of the deployment

permissions [list] (New in version v2.18) user's permissions on the deployment

service_health [dict] information on the service health of the deployment

model_health [dict] information on the model health of the deployment

accuracy_health [dict] information on the accuracy health of the deployment

fairness_health [dict] information on the fairness health of a deployment

governance [dict] information on approval and change requests of a deployment

owners [dict] information on the owners of a deployment

prediction_environment [dict] information on the prediction environment of a deployment

classmethod create_from_learning_model (*model_id: str, label: str, description: Optional[str] = None, default_prediction_server_id: Optional[str] = None, importance: Optional[str] = None, prediction_threshold: Optional[float] = None, status: Optional[str] = None*) → TDeployment

Create a deployment from a DataRobot model.

New in version v2.17.

Parameters

model_id [str] id of the DataRobot model to deploy

label [str] a human-readable label of the deployment

description [str, optional] a human-readable description of the deployment

default_prediction_server_id [str, optional] an identifier of a prediction server to be used as the default prediction server

importance [str, optional] deployment importance

prediction_threshold [float, optional] threshold used for binary classification in predictions

status [str, optional] deployment status

Returns

deployment [Deployment] The created deployment

Examples

```
from datarobot import Project, Deployment
project = Project.get('5506fcd38bd88f5953219da0')
model = project.get_models()[0]
deployment = Deployment.create_from_learning_model(model.id, 'New Deployment')
deployment
>>> Deployment('New Deployment')
```

classmethod create_from_custom_model_version (*custom_model_version_id: str, label: str, description: Optional[str] = None, default_prediction_server_id: Optional[str] = None, max_wait: int = 600, importance: Optional[str] = None*) → TDeployment

Create a deployment from a DataRobot custom model image.

Parameters

custom_model_version_id [str] id of the DataRobot custom model version to deploy The version must have a `base_environment_id`.

label [str] a human readable label of the deployment

description [str, optional] a human readable description of the deployment

default_prediction_server_id [str, optional] an identifier of a prediction server to be used as the default prediction server

max_wait [int, optional] seconds to wait for successful resolution of a deployment creation job. Deployment supports making predictions only after a deployment creating job has successfully finished

importance [str, optional] deployment importance

Returns

deployment [Deployment] The created deployment

classmethod list (*order_by*: Optional[str] = None, *search*: Optional[str] = None, *filters*: Optional[datarobot.models.deployment.DeploymentListFilters] = None) → List[TDeployment]

List all deployments a user can view.

New in version v2.17.

Parameters

order_by [str, optional] (New in version v2.18) the order to sort the deployment list by, defaults to *label*

Allowed attributes to sort by are:

- label
- serviceHealth
- modelHealth
- accuracyHealth
- recentPredictions
- lastPredictionTimestamp

If the sort attribute is preceded by a hyphen, deployments will be sorted in descending order, otherwise in ascending order.

For health related sorting, ascending means failing, warning, passing, unknown.

search [str, optional] (New in version v2.18) case insensitive search against deployment's label and description.

filters [datarobot.models.deployment.DeploymentListFilters, optional] (New in version v2.20) an object containing all filters that you'd like to apply to the resulting list of deployments. See *DeploymentListFilters* for details on usage.

Returns

deployments [list] a list of deployments the user can view

Examples

```
from datarobot import Deployment
deployments = Deployment.list()
deployments
>>> [Deployment('New Deployment'), Deployment('Previous Deployment')]
```

```
from datarobot import Deployment
from datarobot.enums import DEPLOYMENT_SERVICE_HEALTH_STATUS
filters = DeploymentListFilters(
    role='OWNER',
    service_health=[DEPLOYMENT_SERVICE_HEALTH.FAILING]
)
filtered_deployments = Deployment.list(filters=filters)
filtered_deployments
>>> [Deployment('Deployment I Own w/ Failing Service Health')]
```

classmethod `get(deployment_id: str) → TDeployment`

Get information about a deployment.

New in version v2.17.

Parameters

deployment_id [str] the id of the deployment

Returns

deployment [Deployment] the queried deployment

Examples

```
from datarobot import Deployment
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.id
>>> '5c939e08962d741e34f609f0'
deployment.label
>>> 'New Deployment'
```

predict_batch (*source*: Union[str, pandas.core.frame.DataFrame, io.IOBase],
passthrough_columns: Optional[List[str]] = None, download_timeout: Optional[int] = None,
download_read_timeout: Optional[int] = None, upload_read_timeout: Optional[int] = None) → pandas.core.frame.DataFrame

Using a deployment, make batch predictions and return results as a DataFrame.

If a DataFrame is passed as *source*, then the prediction results are merged with the original DataFrame and a new DataFrame is returned.

New in version v3.0.

Parameters

source: str, pd.DataFrame or file object Pass a filepath, file, or DataFrame for making batch predictions.

passthrough_columns [list[string] (optional)] Keep these columns from the scoring dataset in the scored dataset. This is useful for correlating predictions with source data.

download_timeout: int, optional Wait this many seconds for the download to become available. See `datarobot.models.BatchPredictionJob.score()`.

download_read_timeout: int, optional Wait this many seconds for the server to respond between chunks. See `datarobot.models.BatchPredictionJob.score()`.

upload_read_timeout: int, optional Wait this many seconds for the server to respond after a whole dataset upload. See `datarobot.models.BatchPredictionJob.score()`.

Returns

pd.DataFrame Prediction results in a pandas DataFrame.

Raises

InvalidUsageError If the source parameter cannot be determined to be a filepath, file, or DataFrame.

Examples

```
from datarobot.models.deployment import Deployment

deployment = Deployment.get("<MY_DEPLOYMENT_ID>")
prediction_results_as_dataframe = deployment.predict_batch(
    source="./my_local_file.csv",
)
```

get_uri () → str

Returns

url [str] Deployment's overview URI

update (*label: Optional[str] = None, description: Optional[str] = None, importance: Optional[str] = None*) → None
Update the label and description of this deployment.

New in version v2.19.

delete () → None

Delete this deployment.

New in version v2.17.

activate (*max_wait: int = 600*) → None

Activates this deployment. When succeeded, deployment status become *active*.

New in version v2.29.

Parameters

max_wait [int, optional] The maximum time to wait for deployment activation to complete before erroring

deactivate (*max_wait: int = 600*) → None

Deactivates this deployment. When succeeded, deployment status become *inactive*.

New in version v2.29.

Parameters

max_wait [int, optional] The maximum time to wait for deployment deactivation to complete before erroring

replace_model (*new_model_id: str, reason: str, max_wait: int = 600*) → None

Replace the model used in this deployment. To confirm model replacement eligibility, use `validate_replacement_model()` beforehand.

New in version v2.17.

Model replacement is an asynchronous process, which means some preparatory work may be performed after the initial request is completed. This function will not return until all preparatory work is fully finished.

Predictions made against this deployment will start using the new model as soon as the request is completed. There will be no interruption for predictions throughout the process.

Parameters

new_model_id [str] The id of the new model to use. If replacing the deployment's model with a CustomInferenceModel, a specific CustomModelVersion ID must be used.

reason [MODEL_REPLACEMENT_REASON] The reason for the model replacement. Must be one of `ACCURACY`, `DATA_DRIFT`, `ERRORS`, `SCHEDULED_REFRESH`, `SCORING_SPEED`, or `OTHER`. This value will be stored in the model history to keep track of why a model was replaced

max_wait [int, optional] (new in version 2.22) The maximum time to wait for model replacement job to complete before erroring

Examples

```
from datarobot import Deployment
from datarobot.enums import MODEL_REPLACEMENT_REASON
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
deployment.model['id'], deployment.model['type']
>>> ('5c0a979859b00004ba52e431', 'Decision Tree Classifier (Gini)')

deployment.replace_model('5c0a969859b00004ba52e41b', MODEL_REPLACEMENT_REASON.
↳ ACCURACY)
deployment.model['id'], deployment.model['type']
>>> ('5c0a969859b00004ba52e41b', 'Support Vector Classifier (Linear Kernel)')
```

validate_replacement_model (*new_model_id*: str) → Tuple[str, str, Dict[str, Any]]

Validate a model can be used as the replacement model of the deployment.

New in version v2.17.

Parameters

new_model_id [str] the id of the new model to validate

Returns

status [str] status of the validation, will be one of `passing`, `warning` or `failing`. If the status is `passing` or `warning`, use `replace_model()` to perform a model replacement. If the status is `failing`, refer to `checks` for more detail on why the new model cannot be used as a replacement.

message [str] message for the validation result

checks [dict] explain why the new model can or cannot replace the deployment's current model

get_features () → List[FeatureDict]

Retrieve the list of features needed to make predictions on this deployment.

Returns

features: list a list of *feature* dict

Notes

Each *feature* dict contains the following structure:

- `name` : str, feature name
- `feature_type` : str, feature type
- `importance` : float, numeric measure of the relationship strength between the feature and target (independent of model or other features)
- `date_format` : str or None, the date format string for how this feature was interpreted, null if not a date feature, compatible with <https://docs.python.org/2/library/time.html#time.strptime>.
- `known_in_advance` : bool, whether the feature was selected as known in advance in a time series model, false for non-time series models.

Examples

```
from datarobot import Deployment
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
features = deployment.get_features()
features[0]['feature_type']
>>>'Categorical'
features[0]['importance']
>>>0.133
```

submit_actuals (*data*: Union[*pd.DataFrame*, List[*Actual*]], *batch_size*: int = 10000) → None
Submit actuals for processing. The actuals submitted will be used to calculate accuracy metrics.

Parameters

data: list or *pandas.DataFrame*

batch_size: the max number of actuals in each request

If ‘data’ is a list, each item should be a dict-like object with the following keys and values; if ‘data’ is a *pandas.DataFrame*, it should contain the following columns:

- **association_id**: str, a unique identifier used with a prediction, max length 128 characters
- **actual_value**: str or int or float, the actual value of a prediction; should be numeric for deployments with regression models or string for deployments with classification model
- **was_acted_on**: bool, optional, indicates if the prediction was acted on in a way that could have affected the actual outcome
- **timestamp**: datetime or string in RFC3339 format, optional. If the datetime provided does not have a timezone, we assume it is UTC.

Raises

ValueError if input data is not a list of dict-like objects or a *pandas.DataFrame* if input data is empty

Examples

```

from datarobot import Deployment, AccuracyOverTime
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
data = [{
    'association_id': '439917',
    'actual_value': 'True',
    'was_acted_on': True
}]
deployment.submit_actuals(data)

```

get_predictions_by_forecast_date_settings () → ForecastDateSettings

Retrieve predictions by forecast date settings of this deployment.

New in version v2.27.

Returns

settings [dict] Predictions by forecast date settings of the deployment is a dict with the following format:

enabled [bool] Is `True` if predictions by forecast date is enabled for this deployment. To update this setting, see [update_predictions_by_forecast_date_settings\(\)](#)

column_name [string] The column name in prediction datasets to be used as forecast date.

datetime_format [string] The datetime format of the forecast date column in prediction datasets.

update_predictions_by_forecast_date_settings (*enable_predictions_by_forecast_date: bool, forecast_date_column_name: Optional[str] = None, forecast_date_format: Optional[str] = None, max_wait: int = 600*) → None

Update predictions by forecast date settings of this deployment.

New in version v2.27.

Updating predictions by forecast date setting is an asynchronous process, which means some preparatory work may be performed after the initial request is completed. This function will not return until all preparatory work is fully finished.

Parameters

enable_predictions_by_forecast_date [bool] set to `True` if predictions by forecast date is to be turned on or set to `False` if predictions by forecast date is to be turned off.

forecast_date_column_name: string, optional The column name in prediction datasets to be used as forecast date. If `enable_predictions_by_forecast_date` is set to `False`, then the parameter will be ignored.

forecast_date_format: string, optional The datetime format of the forecast date column in prediction datasets. If `enable_predictions_by_forecast_date` is set to `False`, then the parameter will be ignored.

max_wait [int, optional] seconds to wait for successful

Examples

```
# To set predictions by forecast date settings to the same default settings,
↳ you see when using
# the DataRobot web application, you use your 'Deployment' object like this:
deployment.update_predictions_by_forecast_date_settings(
    enable_predictions_by_forecast_date=True,
    forecast_date_column_name="date (actual)",
    forecast_date_format="%Y-%m-%d",
)
```

get_challenger_models_settings() → ChallengerModelsSettings

Retrieve challenger models settings of this deployment.

New in version v2.27.

Returns

settings [dict] Challenger models settings of the deployment is a dict with the following format:

enabled [bool] Is `True` if challenger models is enabled for this deployment. To update existing `challenger_models` settings, see `update_challenger_models_settings()`

update_challenger_models_settings (*challenger_models_enabled: bool, max_wait: int = 600*) → None

Update challenger models settings of this deployment.

New in version v2.27.

Updating challenger models setting is an asynchronous process, which means some preparatory work may be performed after the initial request is completed. This function will not return until all preparatory work is fully finished.

Parameters

challenger_models_enabled [bool] set to `True` if challenger models is to be turned on or set to `False` if challenger models is to be turned off

max_wait [int, optional] seconds to wait for successful resolution

get_segment_analysis_settings() → SegmentAnalysisSettings

Retrieve segment analysis settings of this deployment.

New in version v2.27.

Returns

settings [dict] Segment analysis settings of the deployment containing two items with keys `enabled` and `attributes`, which are further described below.

enabled [bool] Set to `True` if segment analysis is enabled for this deployment. To update existing setting, see `update_segment_analysis_settings()`

attributes [list] To create or update existing segment analysis attributes, see `update_segment_analysis_settings()`

update_segment_analysis_settings (*segment_analysis_enabled: bool, segment_analysis_attributes: Optional[List[str]] = None, max_wait: int = 600*) → None

Update segment analysis settings of this deployment.

New in version v2.27.

Updating segment analysis setting is an asynchronous process, which means some preparatory work may be performed after the initial request is completed. This function will not return until all preparatory work is fully finished.

Parameters

segment_analysis_enabled [bool] set to `True` if segment analysis is to be turned on or set to `False` if segment analysis is to be turned off

segment_analysis_attributes: list, optional A list of strings that gives the segment attributes selected for tracking.

max_wait [int, optional] seconds to wait for successful resolution

get_drift_tracking_settings () → `DriftTrackingSettings`

Retrieve drift tracking settings of this deployment.

New in version v2.17.

Returns

settings [dict] Drift tracking settings of the deployment containing two nested dicts with key `target_drift` and `feature_drift`, which are further described below.

Target drift setting contains:

enabled [bool] If target drift tracking is enabled for this deployment. To create or update existing `target_drift` settings, see `update_drift_tracking_settings()`

Feature drift setting contains:

enabled [bool] If feature drift tracking is enabled for this deployment. To create or update existing `feature_drift` settings, see `update_drift_tracking_settings()`

update_drift_tracking_settings (*target_drift_enabled: Optional[bool] = None, feature_drift_enabled: Optional[bool] = None, max_wait: int = 600*) → `None`

Update drift tracking settings of this deployment.

New in version v2.17.

Updating drift tracking setting is an asynchronous process, which means some preparatory work may be performed after the initial request is completed. This function will not return until all preparatory work is fully finished.

Parameters

target_drift_enabled [bool, optional] if target drift tracking is to be turned on

feature_drift_enabled [bool, optional] if feature drift tracking is to be turned on

max_wait [int, optional] seconds to wait for successful resolution

get_association_id_settings () → `str`

Retrieve association ID setting for this deployment.

New in version v2.19.

Returns

association_id_settings [dict in the following format:]

column_names [list[string], optional] name of the columns to be used as association ID,

required_in_prediction_requests [bool, optional] whether the association ID column is required in prediction requests

update_association_id_settings (*column_names: Optional[List[str]] = None, required_in_prediction_requests: Optional[bool] = None, max_wait: int = 600*) → None

Update association ID setting for this deployment.

New in version v2.19.

Parameters

column_names [list[string], optional] name of the columns to be used as association ID, currently only support a list of one string

required_in_prediction_requests [bool, optional] whether the association ID column is required in prediction requests

max_wait [int, optional] seconds to wait for successful resolution

get_predictions_data_collection_settings () → Dict[str, bool]

Retrieve predictions data collection settings of this deployment.

New in version v2.21.

Returns

predictions_data_collection_settings [dict in the following format:]

enabled [bool] If predictions data collection is enabled for this deployment. To update existing `predictions_data_collection` settings, see `update_predictions_data_collection_settings()`

update_predictions_data_collection_settings (*enabled: bool, max_wait: int = 600*) → None

Update predictions data collection settings of this deployment.

New in version v2.21.

Updating predictions data collection setting is an asynchronous process, which means some preparatory work may be performed after the initial request is completed. This function will not return until all preparatory work is fully finished.

Parameters

enabled: bool if predictions data collection is to be turned on

max_wait [int, optional] seconds to wait for successful resolution

get_prediction_warning_settings () → PredictionWarningSettings

Retrieve prediction warning settings of this deployment.

New in version v2.19.

Returns

settings [dict in the following format:]

enabled [bool] If target prediction_warning is enabled for this deployment. To create or update existing `prediction_warning` settings, see `update_prediction_warning_settings()`

custom_boundaries [dict or None]

If None default boundaries for a model are used. Otherwise has following keys:

upper [float] All predictions greater than provided value are considered anomalous

lower [float] All predictions less than provided value are considered anomalous

update_prediction_warning_settings (*prediction_warning_enabled*: *bool*,
use_default_boundaries: *Optional[bool] = None*,
lower_boundary: *Optional[float] = None*, *upper_boundary*: *Optional[float] = None*, *max_wait*:
int = 600) → None

Update prediction warning settings of this deployment.

New in version v2.19.

Parameters

prediction_warning_enabled [bool] If prediction warnings should be turned on.

use_default_boundaries [bool, optional] If default boundaries of the model should be used for the deployment.

upper_boundary [float, optional] All predictions greater than provided value will be considered anomalous

lower_boundary [float, optional] All predictions less than provided value will be considered anomalous

max_wait [int, optional] seconds to wait for successful resolution

get_prediction_intervals_settings () → PredictionIntervalsSettings

Retrieve prediction intervals settings for this deployment.

New in version v2.19.

Returns

dict in the following format:

enabled [bool] Whether prediction intervals are enabled for this deployment

percentiles [list[int]] List of enabled prediction intervals' sizes for this deployment. Currently we only support one percentile at a time.

Notes

Note that prediction intervals are only supported for time series deployments.

update_prediction_intervals_settings (*percentiles*: *List[int]*, *enabled*: *bool = True*,
max_wait: *int = 600*) → None

Update prediction intervals settings for this deployment.

New in version v2.19.

Parameters

percentiles [list[int]] The prediction intervals percentiles to enable for this deployment. Currently we only support setting one percentile at a time.

enabled [bool, optional (defaults to True)] Whether to enable showing prediction intervals in the results of predictions requested using this deployment.

max_wait [int, optional] seconds to wait for successful resolution

Raises

AssertionError If *percentiles* is in an invalid format

AsyncFailureError If any of the responses from the server are unexpected

AsyncProcessUnsuccessfulError If the prediction intervals calculation job has failed or has been cancelled.

AsyncTimeoutError If the prediction intervals calculation job did not resolve in time

Notes

Updating prediction intervals settings is an asynchronous process, which means some preparatory work may be performed before the settings request is completed. This function will not return until all work is fully finished.

Note that prediction intervals are only supported for time series deployments.

```
get_service_stats (model_id: Optional[str] = None, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, execution_time_quantile: Optional[float] = None, response_time_quantile: Optional[float] = None, slow_requests_threshold: Optional[float] = None)
    → datarobot.models.service_stats.ServiceStats
```

Retrieve value of service stat metrics over a certain time period.

New in version v2.18.

Parameters

model_id [str, optional] the id of the model

start_time [datetime, optional] start of the time period

end_time [datetime, optional] end of the time period

execution_time_quantile [float, optional] quantile for *executionTime*, defaults to 0.5

response_time_quantile [float, optional] quantile for *responseTime*, defaults to 0.5

slow_requests_threshold [float, optional] threshold for *slowRequests*, defaults to 1000

Returns

service_stats [ServiceStats] the queried service stats metrics information

```
get_service_stats_over_time (metric: Optional[str] = None, model_id: Optional[str] = None, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, bucket_size: Optional[str] = None, quantile: Optional[float] = None, threshold: Optional[int] = None)
    → datarobot.models.service_stats.ServiceStatsOverTime
```

Retrieve information about how a service stat metric changes over a certain time period.

New in version v2.18.

Parameters

metric [SERVICE_STAT_METRIC, optional] the service stat metric to retrieve

model_id [str, optional] the id of the model

start_time [datetime, optional] start of the time period

end_time [datetime, optional] end of the time period

bucket_size [str, optional] time duration of a bucket, in ISO 8601 time duration format

quantile [float, optional] quantile for *executionTime* or *responseTime*, ignored when querying other metrics

threshold [int, optional] threshold for `slow_queries`, ignored when querying other metrics

Returns

service_stats_over_time [ServiceStatsOverTime] the queried service stats metric over time information

get_target_drift (*model_id*: Optional[str] = None, *start_time*: Optional[datetime.datetime] = None, *end_time*: Optional[datetime.datetime] = None, *metric*: Optional[str] = None) → datarobot.models.data_drift.TargetDrift

Retrieve target drift information over a certain time period.

New in version v2.21.

Parameters

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

metric [str] (New in version v2.22) metric used to calculate the drift score

Returns

target_drift [TargetDrift] the queried target drift information

get_feature_drift (*model_id*: Optional[str] = None, *start_time*: Optional[datetime.datetime] = None, *end_time*: Optional[datetime.datetime] = None, *metric*: Optional[str] = None) → List[datarobot.models.data_drift.FeatureDrift]

Retrieve drift information for deployment's features over a certain time period.

New in version v2.21.

Parameters

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

metric [str] (New in version v2.22) The metric used to calculate the drift score. Allowed values include *psi*, *kl_divergence*, *dissimilarity*, *hellinger*, and *js_divergence*.

Returns

feature_drift_data [[FeatureDrift]] the queried feature drift information

get_accuracy (*model_id*: Optional[str] = None, *start_time*: Optional[datetime.datetime] = None, *end_time*: Optional[datetime.datetime] = None, *start*: Optional[datetime.datetime] = None, *end*: Optional[datetime.datetime] = None, *target_classes*: Optional[List[str]] = None) → datarobot.models.accuracy.Accuracy

Retrieve values of accuracy metrics over a certain time period.

New in version v2.18.

Parameters

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

target_classes [list[str], optional] Optional list of target class strings

Returns

accuracy [Accuracy] the queried accuracy metrics information

get_accuracy_over_time (*metric*: *Optional[datarobot.enums.ACCURACY_METRIC]* = *None*, *model_id*: *Optional[str]* = *None*, *start_time*: *Optional[datetime.datetime]* = *None*, *end_time*: *Optional[datetime.datetime]* = *None*, *bucket_size*: *Optional[str]* = *None*, *target_classes*: *Optional[List[str]]* = *None*) → *datarobot.models.accuracy.AccuracyOverTime*

Retrieve information about how an accuracy metric changes over a certain time period.

New in version v2.18.

Parameters

metric [ACCURACY_METRIC] the accuracy metric to retrieve

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

bucket_size [str] time duration of a bucket, in ISO 8601 time duration format

target_classes [list[str], optional] Optional list of target class strings

Returns

accuracy_over_time [AccuracyOverTime] the queried accuracy metric over time information

update_secondary_dataset_config (*secondary_dataset_config_id*: *str*, *credential_ids*: *Optional[List[str]]* = *None*) → *str*

Update the secondary dataset config used by Feature discovery model for a given deployment.

New in version v2.23.

Parameters

secondary_dataset_config_id: **str** Id of the secondary dataset config

credential_ids: **list or None** List of DatasetsCredentials used by the secondary datasets

Examples

```
from datarobot import Deployment
deployment = Deployment(deployment_id='5c939e08962d741e34f609f0')
config = deployment.update_secondary_dataset_config('5df109112ca582033ff44084
↪')
config
>>> '5df109112ca582033ff44084'
```

get_secondary_dataset_config () → *str*

Get the secondary dataset config used by Feature discovery model for a given deployment.

New in version v2.23.

Returns

secondary_dataset_config [SecondaryDatasetConfigurations] Id of the secondary dataset config

Examples

```

from datarobot import Deployment
deployment = Deployment(deployment_id='5c939e08962d741e34f609f0')
deployment.update_secondary_dataset_config('5df109112ca582033ff44084')
config = deployment.get_secondary_dataset_config()
config
>>> '5df109112ca582033ff44084'

```

get_prediction_results (*model_id*: *Optional[str]* = *None*, *start_time*: *Optional[datetime.datetime]* = *None*, *end_time*: *Optional[datetime.datetime]* = *None*, *actuals_present*: *Optional[bool]* = *None*, *offset*: *Optional[int]* = *None*, *limit*: *Optional[int]* = *None*) → *List[Dict[str, Any]]*

Retrieve a list of prediction results of the deployment.

New in version v2.24.

Parameters

- model_id** [str] the id of the model
- start_time** [datetime] start of the time period
- end_time** [datetime] end of the time period
- actuals_present** [bool] filters predictions results to only those who have actuals present or with missing actuals
- offset** [int] this many results will be skipped
- limit** [int] at most this many results are returned

Returns

- prediction_results**: *list[dict]* a list of prediction results

Examples

```

from datarobot import Deployment
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
results = deployment.get_prediction_results()

```

download_prediction_results (*filepath*: *str*, *model_id*: *Optional[str]* = *None*, *start_time*: *Optional[datetime.datetime]* = *None*, *end_time*: *Optional[datetime.datetime]* = *None*, *actuals_present*: *Optional[bool]* = *None*, *offset*: *Optional[int]* = *None*, *limit*: *Optional[int]* = *None*) → *None*

Download prediction results of the deployment as a CSV file.

New in version v2.24.

Parameters

- filepath** [str] path of the csv file
- model_id** [str] the id of the model
- start_time** [datetime] start of the time period
- end_time** [datetime] end of the time period

actuals_present [bool] filters predictions results to only those who have actuals present or with missing actuals

offset [int] this many results will be skipped

limit [int] at most this many results are returned

Examples

```
from datarobot import Deployment
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
results = deployment.download_prediction_results('path_to_prediction_results.
↪ csv')
```

download_scoring_code (*filepath: str, source_code: bool = False, include_agent: bool = False, include_prediction_explanations: bool = False, include_prediction_intervals: bool = False*) → None

Retrieve scoring code of the current deployed model.

New in version v2.24.

Parameters

filepath [str] path of the scoring code file

source_code [bool] whether source code or binary of the scoring code will be retrieved

include_agent [bool] whether the scoring code retrieved will include tracking agent

include_prediction_explanations [bool] whether the scoring code retrieved will include prediction explanations

include_prediction_intervals [bool] whether the scoring code retrieved will support prediction intervals

Notes

When setting *include_agent* or *include_predictions_explanations* or *include_prediction_intervals* to *True*, it can take a considerably longer time to download the scoring code.

Examples

```
from datarobot import Deployment
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
results = deployment.download_scoring_code('path_to_scoring_code.jar')
```

delete_monitoring_data (*model_id: str, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, max_wait: int = 600*) → None

Delete deployment monitoring data.

Parameters

model_id [str] id of the model to delete monitoring data

start_time [datetime, optional] start of the time period to delete monitoring data

end_time [datetime, optional] end of the time period to delete monitoring data

max_wait [int, optional] seconds to wait for successful resolution

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T
Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

classmethod from_server_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]], keep_attrs: Optional[Iterable[str]] = None*) → T

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

class datarobot.models.deployment.**DeploymentListFilters** (*role: Optional[str] = None, service_health: Optional[List[str]] = None, model_health: Optional[List[str]] = None, accuracy_health: Optional[List[str]] = None, execution_environment_type: Optional[List[str]] = None, importance: Optional[List[str]] = None*)

class datarobot.models.**ServiceStats** (*period: Optional[Period] = None, metrics: Optional[Metrics] = None, model_id: Optional[str] = None*)

Deployment service stats information.

Attributes

model_id [str] the model used to retrieve service stats metrics

period [dict] the time period used to retrieve service stats metrics

metrics [dict] the service stats metrics

classmethod get (*deployment_id: str, model_id: Optional[str] = None, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, execution_time_quantile: Optional[float] = None, response_time_quantile: Optional[float] = None, slow_requests_threshold: Optional[float] = None*) → datarobot.models.service_stats.ServiceStats
Retrieve value of service stat metrics over a certain time period.

New in version v2.18.

Parameters

deployment_id [str] the id of the deployment
model_id [str, optional] the id of the model
start_time [datetime, optional] start of the time period
end_time [datetime, optional] end of the time period
execution_time_quantile [float, optional] quantile for *executionTime*, defaults to 0.5
response_time_quantile [float, optional] quantile for *responseTime*, defaults to 0.5
slow_requests_threshold [float, optional] threshold for *slowRequests*, defaults to 1000

Returns

service_stats [ServiceStats] the queried service stats metrics

```
class datarobot.models.ServiceStatsOverTime (buckets: Optional[List[Bucket]] = None,  

summary: Optional[Bucket] = None, metric: Optional[str] = None, model_id: Op-  

tional[str] = None)
```

Deployment service stats over time information.

Attributes

model_id [str] the model used to retrieve accuracy metric
metric [str] the service stat metric being retrieved
buckets [dict] how the service stat metric changes over time
summary [dict] summary for the service stat metric

```
classmethod get (deployment_id: str, metric: Optional[str] = None, model_id: Optional[str]  

= None, start_time: Optional[datetime.datetime] = None, end_time: Op-  

tional[datetime.datetime] = None, bucket_size: Optional[str] = None, quan-  

tile: Optional[float] = None, threshold: Optional[int] = None) →  

  datarobot.models.service_stats.ServiceStatsOverTime
```

Retrieve information about how a service stat metric changes over a certain time period.

New in version v2.18.

Parameters

deployment_id [str] the id of the deployment
metric [SERVICE_STAT_METRIC, optional] the service stat metric to retrieve
model_id [str, optional] the id of the model
start_time [datetime, optional] start of the time period
end_time [datetime, optional] end of the time period
bucket_size [str, optional] time duration of a bucket, in ISO 8601 time duration format
quantile [float, optional] quantile for *executionTime* or *responseTime*, ignored when querying other metrics
threshold [int, optional] threshold for *slowQueries*, ignored when querying other metrics

Returns

service_stats_over_time [ServiceStatsOverTime] the queried service stat over time information

bucket_values

The metric value for all time buckets, keyed by start time of the bucket.

Returns

bucket_values: `OrderedDict`

```
class datarobot.models.TargetDrift (period=None, metric=None, model_id=None, target_name=None, drift_score=None, sample_size=None, baseline_sample_size=None)
```

Deployment target drift information.

Attributes

model_id [str] the model used to retrieve target drift metric

period [dict] the time period used to retrieve target drift metric

metric [str] the data drift metric

target_name [str] name of the target

drift_score [float] target drift score

sample_size [int] count of data points for comparison

baseline_sample_size [int] count of data points for baseline

```
classmethod get (deployment_id: str, model_id: Optional[str] = None, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, metric: Optional[str] = None) → datarobot.models.data_drift.TargetDrift
```

Retrieve target drift information over a certain time period.

New in version v2.21.

Parameters

deployment_id [str] the id of the deployment

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

metric [str] (New in version v2.22) metric used to calculate the drift score

Returns

target_drift [TargetDrift] the queried target drift information

Examples

```
from datarobot import Deployment, TargetDrift
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
target_drift = TargetDrift.get(deployment.id)
target_drift.period['end']
>>>'2019-08-01 00:00:00+00:00'
target_drift.drift_score
>>>0.03423
accuracy.target_name
>>>'readmitted'
```

```
class datarobot.models.FeatureDrift (period=None, metric=None, model_id=None,
name=None, drift_score=None, feature_impact=None,
sample_size=None, baseline_sample_size=None)
```

Deployment feature drift information.

Attributes

model_id [str] the model used to retrieve feature drift metric

period [dict] the time period used to retrieve feature drift metric

metric [str] the data drift metric

name [str] name of the feature

drift_score [float] feature drift score

sample_size [int] count of data points for comparison

baseline_sample_size [int] count of data points for baseline

```
classmethod list (deployment_id: str, model_id: Optional[str] = None,
start_time: Optional[datetime.datetime] = None, end_time: Op-
tional[datetime.datetime] = None, metric: Optional[str] = None) →
List[datarobot.models.data_drift.FeatureDrift]
```

Retrieve drift information for deployment's features over a certain time period.

New in version v2.21.

Parameters

deployment_id [str] the id of the deployment

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

metric [str] (New in version v2.22) metric used to calculate the drift score

Returns

feature_drift_data [[FeatureDrift]] the queried feature drift information

Examples

```
from datarobot import Deployment, TargetDrift
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
feature_drift = FeatureDrift.list(deployment.id)[0]
feature_drift.period
>>>'2019-08-01 00:00:00+00:00'
feature_drift.drift_score
>>>0.252
feature_drift.name
>>>'age'
```

```
class datarobot.models.Accuracy (period: Optional[Period] = None, metrics: Optional[Dict[str,
Metric]] = None, model_id: Optional[str] = None)
```

Deployment accuracy information.

Attributes

model_id [str] the model used to retrieve accuracy metrics

period [dict] the time period used to retrieve accuracy metrics

metrics [dict] the accuracy metrics

classmethod **get** (*deployment_id: str, model_id: Optional[str] = None, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, target_classes: Optional[List[str]] = None*) → datarobot.models.accuracy.Accuracy

Retrieve values of accuracy metrics over a certain time period.

New in version v2.18.

Parameters

deployment_id [str] the id of the deployment

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

target_classes [list[str], optional] Optional list of target class strings

Returns

accuracy [Accuracy] the queried accuracy metrics information

Examples

```
from datarobot import Deployment, Accuracy
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
accuracy = Accuracy.get(deployment.id)
accuracy.period['end']
>>>'2019-08-01 00:00:00+00:00'
accuracy.metric['LogLoss']['value']
>>>0.7533
accuracy.metric_values['LogLoss']
>>>0.7533
```

metric_values

The value for all metrics, keyed by metric name.

Returns

metric_values: Dict

metric_baselines

The baseline value for all metrics, keyed by metric name.

Returns

metric_baselines: Dict

percent_changes

The percent change of value over baseline for all metrics, keyed by metric name.

Returns

percent_changes: Dict

```
class datarobot.models.AccuracyOverTime (buckets: Optional[List[Bucket]] = None, summary: Optional[Summary] = None, baseline: Optional[Bucket] = None, metric: Optional[str] = None, model_id: Optional[str] = None)
```

Deployment accuracy over time information.

Attributes

model_id [str] the model used to retrieve accuracy metric

metric [str] the accuracy metric being retrieved

buckets [dict] how the accuracy metric changes over time

summary [dict] summary for the accuracy metric

baseline [dict] baseline for the accuracy metric

```
classmethod get (deployment_id: str, metric: Optional[datarobot.enums.ACCURACY_METRIC] = None, model_id: Optional[str] = None, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, bucket_size: Optional[str] = None, target_classes: Optional[List[str]] = None) → datarobot.models.accuracy.AccuracyOverTime
```

Retrieve information about how an accuracy metric changes over a certain time period.

New in version v2.18.

Parameters

deployment_id [str] the id of the deployment

metric [ACCURACY_METRIC] the accuracy metric to retrieve

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

bucket_size [str] time duration of a bucket, in ISO 8601 time duration format

target_classes [list[str], optional] Optional list of target class strings

Returns

accuracy_over_time [AccuracyOverTime] the queried accuracy metric over time information

Examples

```
from datarobot import Deployment, AccuracyOverTime
from datarobot.enums import ACCURACY_METRICS
deployment = Deployment.get(deployment_id='5c939e08962d741e34f609f0')
accuracy_over_time = AccuracyOverTime.get(deployment.id, metric=ACCURACY_
↳METRIC.LOGLOSS)
accuracy_over_time.metric
>>>'LogLoss'
accuracy_over_time.metric_values
>>>{datetime.datetime(2019, 8, 1): 0.73, datetime.datetime(2019, 8, 2): 0.55}
```

```
classmethod get_as_dataframe (deployment_id: str, metrics: Optional[List[datarobot.enums.ACCURACY_METRIC]] = None, model_id: Optional[str] = None, start_time: Optional[datetime.datetime] = None, end_time: Optional[datetime.datetime] = None, bucket_size: Optional[str] = None) → pandas.core.frame.DataFrame
```

Retrieve information about how a list of accuracy metrics change over a certain time period as pandas DataFrame.

In the returned DataFrame, the columns corresponds to the metrics being retrieved; the rows are labeled with the start time of each bucket.

Parameters

deployment_id [str] the id of the deployment

metrics [[`ACCURACY_METRIC`]] the accuracy metrics to retrieve

model_id [str] the id of the model

start_time [datetime] start of the time period

end_time [datetime] end of the time period

bucket_size [str] time duration of a bucket, in ISO 8601 time duration format

Returns

accuracy_over_time: `pd.DataFrame`

bucket_values

The metric value for all time buckets, keyed by start time of the bucket.

Returns

bucket_values: `Dict`

bucket_sample_sizes

The sample size for all time buckets, keyed by start time of the bucket.

Returns

bucket_sample_sizes: `Dict`

2.3.20 External Scores and Insights

```
class datarobot.ExternalScores (project_id: str, scores: List[Score], model_id: Optional[str] = None, dataset_id: Optional[str] = None, actual_value_column: Optional[str] = None)
```

Metric scores on prediction dataset with target or actual value column in unsupervised case. Contains project metrics for supervised and special classification metrics set for unsupervised projects.

New in version v2.21.

Examples

List all scores for a dataset

```
import datarobot as dr
scores = dr.Scores.list(project_id, dataset_id=dataset_id)
```

Attributes**project_id: str** id of the project the model belongs to**model_id: str** id of the model**dataset_id: str** id of the prediction dataset with target or actual value column for unsupervised case**actual_value_column: str, optional** For unsupervised projects only. Actual value column which was used to calculate the classification metrics and insights on the prediction dataset.**scores: list of dicts in a form of {*label*: *metric_name*, *value*: *score*}**
Scores on the dataset.**classmethod create** (*project_id: str, model_id: str, dataset_id: str, actual_value_column: Optional[str] = None*) → Job

Compute an external dataset insights for the specified model.

Parameters**project_id** [str] id of the project the model belongs to**model_id** [str] id of the model for which insights is requested**dataset_id** [str] id of the dataset for which insights is requested**actual_value_column** [str, optional] actual values column label, for unsupervised projects only**Returns****job** [Job] an instance of created async job**classmethod list** (*project_id: str, model_id: Optional[str] = None, dataset_id: Optional[str] = None, offset: int = 0, limit: int = 100*) →List[datarobot.models.external_dataset_scores_insights.external_scores.ExternalScores]
Fetch external scores list for the project and optionally for model and dataset.**Parameters****project_id: str** id of the project**model_id: str, optional** if specified, only scores for this model will be retrieved**dataset_id: str, optional** if specified, only scores for this dataset will be retrieved**offset: int, optional** this many results will be skipped, default: 0**limit: int, optional** at most this many results are returned, default: 100, max 1000. To return all results, specify 0**Returns**

A list of [py:class:External Scores <datarobot.ExternalScores> objects]

classmethod get (*project_id: str, model_id: str, dataset_id: str*) →
datarobot.models.external_dataset_scores_insights.external_scores.ExternalScores

Retrieve external scores for the project, model and dataset.

Parameters**project_id: str** id of the project**model_id: str** if specified, only scores for this model will be retrieved**dataset_id: str** if specified, only scores for this dataset will be retrieved

Returns

External Scores object

class datarobot.**ExternalLiftChart** (*dataset_id: str, bins: List[Bin]*)

Lift chart for the model and prediction dataset with target or actual value column in unsupervised case.

New in version v2.21.

LiftChartBin is a dict containing the following:

- **actual** (float) Sum of actual target values in bin
- **predicted** (float) Sum of predicted target values in bin
- **bin_weight** (float) The weight of the bin. For weighted projects, it is the sum of the weights of the rows in the bin. For unweighted projects, it is the number of rows in the bin.

Attributes

dataset_id: str id of the prediction dataset with target or actual value column for unsupervised case

bins: list of dict List of dicts with schema described as LiftChartBin above.

classmethod list (*project_id: str, model_id: str, dataset_id: Optional[str]*
= None, offset: int = 0, limit: int = 100) →

List[datarobot.models.external_dataset_scores_insights.external_lift_chart.ExternalLiftChart]
Retrieve list of the lift charts for the model.

Parameters

project_id: str id of the project

model_id: str if specified, only lift chart for this model will be retrieved

dataset_id: str, optional if specified, only lift chart for this dataset will be retrieved

offset: int, optional this many results will be skipped, default: 0

limit: int, optional at most this many results are returned, default: 100, max 1000. To return all results, specify 0

Returns

A list of [py:class:ExternalLiftChart <datarobot.ExternalLiftChart> objects]

classmethod get (*project_id: str, model_id: str, dataset_id: str*) →
datarobot.models.external_dataset_scores_insights.external_lift_chart.ExternalLiftChart

Retrieve lift chart for the model and prediction dataset.

Parameters

project_id: str project id

model_id: str model id

dataset_id: str prediction dataset id with target or actual value column for unsupervised case

Returns

ExternalLiftChart object

```
class datarobot.ExternalRocCurve (dataset_id: str, roc_points: List[EstimatedMetric],
                                negative_class_predictions: List[float],
                                positive_class_predictions: List[float])
```

ROC curve data for the model and prediction dataset with target or actual value column in unsupervised case.

New in version v2.21.

Attributes

dataset_id: str id of the prediction dataset with target or actual value column for unsupervised case

roc_points: list of dict List of precalculated metrics associated with thresholds for ROC curve.

negative_class_predictions: list of float List of predictions from example for negative class

positive_class_predictions: list of float List of predictions from example for positive class

```
classmethod list (project_id: str, model_id: str, dataset_id: Optional[str]
                  = None, offset: int = 0, limit: int = 100) →
                  List[datarobot.models.external_dataset_scores_insights.external_roc_curve.ExternalRocCurve]
```

Retrieve list of the roc curves for the model.

Parameters

project_id: str id of the project

model_id: str if specified, only lift chart for this model will be retrieved

dataset_id: str, optional if specified, only lift chart for this dataset will be retrieved

offset: int, optional this many results will be skipped, default: 0

limit: int, optional at most this many results are returned, default: 100, max 1000. To return all results, specify 0

Returns

A list of [py:class:*ExternalRocCurve* <datarobot.ExternalRocCurve> objects]

```
classmethod get (project_id: str, model_id: str, dataset_id: str) →
                  datarobot.models.external_dataset_scores_insights.external_roc_curve.ExternalRocCurve
```

Retrieve ROC curve chart for the model and prediction dataset.

Parameters

project_id: str project id

model_id: str model id

dataset_id: str prediction dataset id with target or actual value column for unsupervised case

Returns

ExternalRocCurve object

2.3.21 Feature

```
class datarobot.models.Feature (id, project_id=None, name=None, feature_type=None,  
                                importance=None, low_information=None,  
                                unique_count=None, na_count=None, date_format=None,  
                                min=None, max=None, mean=None, me-  
median=None, std_dev=None, time_series_eligible=None,  
                                time_series_eligibility_reason=None, time_step=None,  
                                time_unit=None, target_leakage=None, fea-  
ture_lineage_id=None, key_summary=None, multil-  
abel_insights=None)
```

A feature from a project's dataset

These are features either included in the originally uploaded dataset or added to it via feature transformations. In time series projects, these will be distinct from the *ModelingFeatures* created during partitioning; otherwise, they will correspond to the same features. For more information about input and modeling features, see the *time series documentation*.

The *min*, *max*, *mean*, *median*, and *std_dev* attributes provide information about the distribution of the feature in the EDA sample data. For non-numeric features or features created prior to these summary statistics becoming available, they will be *None*. For features where the summary statistics are available, they will be in a format compatible with the data type, i.e. date type features will have their summary statistics expressed as ISO-8601 formatted date strings.

Attributes

id [int] the id for the feature - note that *name* is used to reference the feature instead of *id*

project_id [str] the id of the project the feature belongs to

name [str] the name of the feature

feature_type [str] the type of the feature, e.g. "Categorical", "Text"

importance [float or None] numeric measure of the strength of relationship between the feature and target (independent of any model or other features); may be *None* for non-modeling features such as partition columns

low_information [bool] whether a feature is considered too uninformative for modeling (e.g. because it has too few values)

unique_count [int] number of unique values

na_count [int or None] number of missing values

date_format [str or None] For Date features, the date format string for how this feature was interpreted, compatible with <https://docs.python.org/2/library/time.html#time.strptime>. For other feature types, *None*.

min [str, int, float, or None] The minimum value of the source data in the EDA sample

max [str, int, float, or None] The maximum value of the source data in the EDA sample

mean [str, int, or float] The arithmetic mean of the source data in the EDA sample

median [str, int, float, or None] The median of the source data in the EDA sample

std_dev [str, int, float, or None] The standard deviation of the source data in the EDA sample

time_series_eligible [bool] Whether this feature can be used as the datetime partition column in a time series project.

time_series_eligibility_reason [str] Why the feature is ineligible for the datetime partition column in a time series project, or `None` when it is eligible.

time_step [int or None] For time series eligible features, a positive integer determining the interval at which windows can be specified. If used as the datetime partition column on a time series project, the feature derivation and forecast windows must start and end at an integer multiple of this value. None for features that are not time series eligible.

time_unit [str or None] For time series eligible features, the time unit covered by a single time step, e.g. `HOUR`, or None for features that are not time series eligible.

target_leakage [str] Whether a feature is considered to have target leakage or not. A value of `SKIPPED_DETECTION` indicates that target leakage detection was not run on the feature. `FALSE` indicates no leakage, `MODERATE` indicates a moderate risk of target leakage, and `HIGH_RISK` indicates a high risk of target leakage

feature_lineage_id [str] id of a lineage for automatically discovered features or derived time series features.

key_summary: list of dict Statistics for top 50 keys (truncated to 103 characters) of Summarized Categorical column example:

```
{'key': 'DataRobot', 'summary': {'min': 0, 'max': 29815.0, 'stdDev': 6498.029, 'mean': 1490.75, 'median': 0.0, 'pctRows': 5.0}}
```

where,

key: string or None name of the key

summary: dict statistics of the key

max: maximum value of the key. min: minimum value of the key. mean: mean value of the key. median: median value of the key. stdDev: standard deviation of the key. pctRows: percentage occurrence of key in the EDA sample of the feature.

multilabel_insights_key [str or None] For multicategorical columns this will contain a key for multilabel insights. The key is unique for a project, feature and EDA stage combination. This will be the key for the most recent, finished EDA stage.

classmethod get (*project_id*, *feature_name*)
Retrieve a single feature

Parameters

project_id [str] The ID of the project the feature is associated with.

feature_name [str] The name of the feature to retrieve

Returns

feature [Feature] The queried instance

get_multiseries_properties (*multiseries_id_columns*, *max_wait=600*)
Retrieve time series properties for a potential multiseries datetime partition column

Multiseries time series projects use multiseries id columns to model multiple distinct series within a single project. This function returns the time series properties (time step and time unit) of this column if it were used as a datetime partition column with the specified multiseries id columns, running multiseries detection automatically if it had not previously been successfully ran.

Parameters

multiseries_id_columns [list of str] the name(s) of the multiseries id columns to use with this datetime partition column. Currently only one multiseries id column is supported.

max_wait [int, optional] if a multiseries detection task is run, the maximum amount of time to wait for it to complete before giving up

Returns

properties [dict] A dict with three keys:

- **time_series_eligible** : bool, whether the column can be used as a partition column
- **time_unit** : str or null, the inferred time unit if used as a partition column
- **time_step** : int or null, the inferred time step if used as a partition column

get_cross_series_properties (*datetime_partition_column*, *cross_series_group_by_columns*, *max_wait=600*)

Retrieve cross-series properties for multiseries ID column.

This function returns the cross-series properties (eligibility as group-by column) of this column if it were used with specified datetime partition column and with current multiseries id column, running cross-series group-by validation automatically if it had not previously been successfully ran.

Parameters

datetime_partition_column [datetime partition column]

cross_series_group_by_columns [list of str] the name(s) of the columns to use with this multiseries ID column. Currently only one cross-series group-by column is supported.

max_wait [int, optional] if a multiseries detection task is run, the maximum amount of time to wait for it to complete before giving up

Returns

properties [dict] A dict with three keys:

- **name** : str, column name
- **eligibility** : str, reason for column eligibility
- **isEligible** : bool, is column eligible as cross-series group-by

get_multicategorical_histogram ()

Retrieve multicategorical histogram for this feature

New in version v2.24.

Returns

[datarobot.models.MulticategoricalHistogram](#)

Raises

datarobot.errors.InvalidUsageError if this method is called on a unsuited feature

ValueError if no `multilabel_insights_key` is present for this feature

get_pairwise_correlations ()

Retrieve pairwise label correlation for multicategorical features

New in version v2.24.

Returns

[datarobot.models.PairwiseCorrelations](#)

Raises

datarobot.errors.InvalidUsageError if this method is called on a unsuited feature

ValueError if no `multilabel_insights_key` is present for this feature

get_pairwise_joint_probabilities ()

Retrieve pairwise label joint probabilities for multicategorical features

New in version v2.24.

Returns

`datarobot.models.PairwiseJointProbabilities`

Raises

datarobot.errors.InvalidUsageError if this method is called on a unsuited feature

ValueError if no `multilabel_insights_key` is present for this feature

get_pairwise_conditional_probabilities ()

Retrieve pairwise label conditional probabilities for multicategorical features

New in version v2.24.

Returns

`datarobot.models.PairwiseConditionalProbabilities`

Raises

datarobot.errors.InvalidUsageError if this method is called on a unsuited feature

ValueError if no `multilabel_insights_key` is present for this feature

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

classmethod from_server_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]], keep_attrs: Optional[Iterable[str]] = None*) → T

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

get_histogram (*bin_limit=None*)

Retrieve a feature histogram

Parameters

bin_limit [int or None] Desired max number of histogram bins. If omitted, by default endpoint will use 60.

Returns

featureHistogram [FeatureHistogram] The requested histogram with desired number or bins

```
class datarobot.models.ModelingFeature (project_id=None, name=None, feature_type=None,
                                         importance=None, low_information=None,
                                         unique_count=None, na_count=None,
                                         date_format=None, min=None, max=None,
                                         mean=None, median=None, std_dev=None,
                                         parent_feature_names=None, key_summary=None,
                                         is_restored_after_reduction=None)
```

A feature used for modeling

In time series projects, a new set of modeling features is created after setting the partitioning options. These features are automatically derived from those in the project's dataset and are the features used for modeling. Modeling features are only accessible once the target and partitioning options have been set. In projects that don't use time series modeling, once the target has been set, ModelingFeatures and Features will behave the same.

For more information about input and modeling features, see the [time series documentation](#).

As with the *Feature* object, the *min*, *max*, *mean*, *median*, and *std_dev* attributes provide information about the distribution of the feature in the EDA sample data. For non-numeric features, they will be None. For features where the summary statistics are available, they will be in a format compatible with the data type, i.e. date type features will have their summary statistics expressed as ISO-8601 formatted date strings.

Attributes

project_id [str] the id of the project the feature belongs to

name [str] the name of the feature

feature_type [str] the type of the feature, e.g. 'Categorical', 'Text'

importance [float or None] numeric measure of the strength of relationship between the feature and target (independent of any model or other features); may be None for non-modeling features such as partition columns

low_information [bool] whether a feature is considered too uninformative for modeling (e.g. because it has too few values)

unique_count [int] number of unique values

na_count [int or None] number of missing values

date_format [str or None] For Date features, the date format string for how this feature was interpreted, compatible with <https://docs.python.org/2/library/time.html#time.strptime> . For other feature types, None.

min [str, int, float, or None] The minimum value of the source data in the EDA sample

max [str, int, float, or None] The maximum value of the source data in the EDA sample

mean [str, int, or float] The arithmetic mean of the source data in the EDA sample

median [str, int, float, or None] The median of the source data in the EDA sample

std_dev [str, int, float, or None] The standard deviation of the source data in the EDA sample

parent_feature_names [list of str] A list of the names of input features used to derive this modeling feature. In cases where the input features and modeling features are the same, this will simply contain the feature's name. Note that if a derived feature was used to create this modeling feature, the values here will not necessarily correspond to the features that must be supplied at prediction time.

key_summary: list of dict Statistics for top 50 keys (truncated to 103 characters) of Summarized Categorical column example:

```
{'key': 'DataRobot',
 'summary': {'min': 0,
             'max': 29815.0,
             'stdDev': 6498.029,
             'mean': 1490.75,
             'median': 0.0,
             'pctRows': 5.0}}
```

where,

key: **string or None** name of the key

summary: **dict** statistics of the key

max: maximum value of the key. min: minimum value of the key. mean: mean value of the key. median: median value of the key. stdDev: standard deviation of the key. pctRows: percentage occurrence of key in the EDA sample of the feature.

classmethod **get** (*project_id*, *feature_name*)

Retrieve a single modeling feature

Parameters

project_id [str] The ID of the project the feature is associated with.

feature_name [str] The name of the feature to retrieve

Returns

feature [ModelingFeature] The requested feature

```
class datarobot.models.DatasetFeature(id_, dataset_id=None, dataset_version_id=None,
                                       name=None, feature_type=None,
                                       low_information=None, unique_count=None,
                                       na_count=None, date_format=None, min=None,
                                       max=None, mean=None, median=None,
                                       std_dev=None, time_series_eligible=None,
                                       time_series_eligibility_reason=None,
                                       time_step=None, time_unit=None, target_leakage=None,
                                       target_leakage_reason=None)
```

A feature from a project's dataset

These are features either included in the originally uploaded dataset or added to it via feature transformations.

The `min`, `max`, `mean`, `median`, and `std_dev` attributes provide information about the distribution of the feature in the EDA sample data. For non-numeric features or features created prior to these summary statistics becoming available, they will be `None`. For features where the summary statistics are available, they will be in a format compatible with the data type, i.e. date type features will have their summary statistics expressed as ISO-8601 formatted date strings.

Attributes

id [int] the id for the feature - note that `name` is used to reference the feature instead of `id`

dataset_id [str] the id of the dataset the feature belongs to

dataset_version_id [str] the id of the dataset version the feature belongs to

name [str] the name of the feature

feature_type [str, optional] the type of the feature, e.g. 'Categorical', 'Text'

low_information [bool, optional] whether a feature is considered too uninformative for modeling (e.g. because it has too few values)

unique_count [int, optional] number of unique values

na_count [int, optional] number of missing values

date_format [str, optional] For Date features, the date format string for how this feature was interpreted, compatible with <https://docs.python.org/2/library/time.html#time.strptime> . For other feature types, None.

min [str, int, float, optional] The minimum value of the source data in the EDA sample

max [str, int, float, optional] The maximum value of the source data in the EDA sample

mean [str, int, float, optional] The arithmetic mean of the source data in the EDA sample

median [str, int, float, optional] The median of the source data in the EDA sample

std_dev [str, int, float, optional] The standard deviation of the source data in the EDA sample

time_series_eligible [bool, optional] Whether this feature can be used as the datetime partition column in a time series project.

time_series_eligibility_reason [str, optional] Why the feature is ineligible for the datetime partition column in a time series project, or `âsuitableâ` when it is eligible.

time_step [int, optional] For time series eligible features, a positive integer determining the interval at which windows can be specified. If used as the datetime partition column on a time series project, the feature derivation and forecast windows must start and end at an integer multiple of this value. None for features that are not time series eligible.

time_unit [str, optional] For time series eligible features, the time unit covered by a single time step, e.g. `âHOURâ`, or None for features that are not time series eligible.

target_leakage [str, optional] Whether a feature is considered to have target leakage or not. A value of `âSKIPPED_DETECTIONâ` indicates that target leakage detection was not run on the feature. `âFALSEâ` indicates no leakage, `âMODERATEâ` indicates a moderate risk of target leakage, and `âHIGH_RISKâ` indicates a high risk of target leakage

target_leakage_reason: string, optional The descriptive text explaining the reason for target leakage, if any.

get_histogram (*bin_limit=None*)

Retrieve a feature histogram

Parameters

bin_limit [int or None] Desired max number of histogram bins. If omitted, by default endpoint will use 60.

Returns

featureHistogram [DatasetFeatureHistogram] The requested histogram with desired number or bins

class `datarobot.models.DatasetFeatureHistogram` (*plot*)

classmethod **get** (*dataset_id, feature_name, bin_limit=None, key_name=None*)

Retrieve a single feature histogram

Parameters

dataset_id [str] The ID of the Dataset the feature is associated with.

feature_name [str] The name of the feature to retrieve

bin_limit [int or None] Desired max number of histogram bins. If omitted, by default the endpoint will use 60.

key_name: string or None (Only required for summarized categorical feature) Name of the top 50 keys for which plot to be retrieved

Returns

featureHistogram [FeatureHistogram] The queried instance with *plot* attribute in it.

class datarobot.models.**FeatureHistogram** (*plot*)

classmethod **get** (*project_id, feature_name, bin_limit=None, key_name=None*)
Retrieve a single feature histogram

Parameters

project_id [str] The ID of the project the feature is associated with.

feature_name [str] The name of the feature to retrieve

bin_limit [int or None] Desired max number of histogram bins. If omitted, by default endpoint will use 60.

key_name: string or None (Only required for summarized categorical feature) Name of the top 50 keys for which plot to be retrieved

Returns

featureHistogram [FeatureHistogram] The queried instance with *plot* attribute in it.

class datarobot.models.**InteractionFeature** (*rows, source_columns, bars, bubbles*)
Interaction feature data

New in version v2.21.

Attributes

rows: int Total number of rows

source_columns: list(str) names of two categorical features which were combined into this one

bars: list(dict) dictionaries representing frequencies of each independent value from the source columns

bubbles: list(dict) dictionaries representing frequencies of each combined value in the interaction feature.

classmethod **get** (*project_id, feature_name*)
Retrieve a single Interaction feature

Parameters

project_id [str] The id of the project the feature belongs to

feature_name [str] The name of the Interaction feature to retrieve

Returns

feature [InteractionFeature] The queried instance

class datarobot.models.**MulticategoricalHistogram** (*feature_name, histogram*)
Histogram for Multicategorical feature.

New in version v2.24.

Notes

HistogramValues contains:

- `values.[].label`: string - Label name
- `values.[].plot`: list - Histogram for label
- `values.[].plot.[].label_relevance`: int - Label relevance value
- `values.[].plot.[].row_count`: int - Row count where label has given relevance
- `values.[].plot.[].row_pct`: float - Percentage of rows where label has given relevance

Attributes

feature_name [str] Name of the feature

values [list(dict)] List of Histogram values with a schema described as HistogramValues

classmethod `get` (*multilabel_insights_key*)

Retrieves multicategorical histogram

You might find it more convenient to use `Feature.get_multicategorical_histogram` instead.

Parameters

multilabel_insights_key: string Key for multilabel insights, unique for a project, feature and EDA stage combination. The `multilabel_insights_key` can be retrieved via `Feature.multilabel_insights_key`.

Returns

MulticategoricalHistogram The multicategorical histogram for `multilabel_insights_key`

to_dataframe ()

Convenience method to get all the information from this `multicategorical_histogram` instance in form of a `pandas.DataFrame`.

Returns

pandas.DataFrame Histogram information as a `multicategorical_histogram`. The dataframe will contain these columns: `feature_name`, `label`, `label_relevance`, `row_count` and `row_pct`

class `datarobot.models.PairwiseCorrelations` (*args, **kwargs)

Correlation of label pairs for multicategorical feature.

New in version v2.24.

Notes

CorrelationValues contain:

- `values.[].label_configuration`: list of length 2 - Configuration of the label pair
- `values.[].label_configuration.[].label`: str - Label name
- `values.[].statistic_value`: float - Statistic value

Attributes

feature_name [str] Name of the feature

values [list(dict)] List of correlation values with a schema described as `CorrelationValues`

statistic_dataframe [pandas.DataFrame] Correlation values for all label pairs as a DataFrame

classmethod `get` (*multilabel_insights_key*)

Retrieves pairwise correlations

You might find it more convenient to use `Feature.get_pairwise_correlations` instead.

Parameters

multilabel_insights_key: string Key for multilabel insights, unique for a project, feature and EDA stage combination. The `multilabel_insights_key` can be retrieved via `Feature.multilabel_insights_key`.

Returns

PairwiseCorrelations The pairwise label correlations

as_dataframe ()

The pairwise label correlations as a (num_labels x num_labels) DataFrame.

Returns

pandas.DataFrame The pairwise label correlations. Index and column names allow the interpretation of the values.

class `datarobot.models.PairwiseJointProbabilities` (*args, **kwargs)

Joint probabilities of label pairs for multicategorical feature.

New in version v2.24.

Notes

`ProbabilityValues` contain:

- `values.[].label_configuration`: list of length 2 - Configuration of the label pair
- `values.[].label_configuration.[].relevance`: int – 0 for absence of the labels, 1 for the presence of labels
- `values.[].label_configuration.[].label`: str – Label name
- `values.[].statistic_value`: float – Statistic value

Attributes

feature_name [str] Name of the feature

values [list(dict)] List of joint probability values with a schema described as `ProbabilityValues`

statistic_dataframes [dict(pandas.DataFrame)] Joint Probability values as DataFrames for different relevance combinations.

E.g. The probability $P(A=0,B=1)$ can be retrieved via:
`pairwise_joint_probabilities.statistic_dataframes[(0,1)].loc['A', 'B']`

classmethod `get` (*multilabel_insights_key*)

Retrieves pairwise joint probabilities

You might find it more convenient to use `Feature.get_pairwise_joint_probabilities` instead.

Parameters

multilabel_insights_key: **string** Key for multilabel insights, unique for a project, feature and EDA stage combination. The `multilabel_insights_key` can be retrieved via `Feature.multilabel_insights_key`.

Returns

PairwiseJointProbabilities The pairwise joint probabilities

as_dataframe (*relevance_configuration*)

Joint probabilities of label pairs as a (num_labels x num_labels) DataFrame.

Parameters

relevance_configuration: **tuple of length 2** Valid options are (0, 0), (0, 1), (1, 0) and (1, 1). Values of 0 indicate absence of labels and 1 indicates presence of labels. The first value describes the presence for the labels in axis=0 and the second value describes the presence for the labels in axis=1.

For example the matrix values for a relevance configuration of (0, 1) describe the probabilities of absent labels in the index axis and present labels in the column axis.

E.g. The probability $P(A=0, B=1)$ can be retrieved via:
`pairwise_joint_probabilities.as_dataframe((0, 1)).loc['A', 'B']`

Returns

pandas.DataFrame The joint probabilities for the requested `relevance_configuration`. Index and column names allow the interpretation of the values.

class `datarobot.models.PairwiseConditionalProbabilities` (**args, **kwargs*)

Conditional probabilities of label pairs for multicategorical feature.

New in version v2.24.

Notes

`ProbabilityValues` contain:

- `values.[].label_configuration`: list of length 2 - Configuration of the label pair
- `values.[].label_configuration.[].relevance`: int - 0 for absence of the labels, 1 for the presence of labels
- `values.[].label_configuration.[].label`: str - Label name
- `values.[].statistic_value`: float - Statistic value

Attributes

feature_name [str] Name of the feature

values [list(dict)] List of conditional probability values with a schema described as `ProbabilityValues`

statistic_dataframes [dict(pandas.DataFrame)] Conditional Probability values as DataFrames for different relevance combinations. The label names in the columns are the events, on which we condition. The label names in the index are the events whose conditional probability given the indexes is in the dataframe.

E.g. The probability $P(A=0|B=1)$ can be retrieved via:
`pairwise_conditional_probabilities.statistic_dataframes[(0, 1)].loc['A', 'B']`

classmethod `get` (*multilabel_insights_key*)

Retrieves pairwise conditional probabilities

You might find it more convenient to use `Feature.get_pairwise_conditional_probabilities` instead.

Parameters

multilabel_insights_key: **string** Key for multilabel insights, unique for a project, feature and EDA stage combination. The multilabel_insights_key can be retrieved via `Feature.multilabel_insights_key`.

Returns

PairwiseConditionalProbabilities The pairwise conditional probabilities

as_dataframe (*relevance_configuration*)

Conditional probabilities of label pairs as a (num_labels x num_labels) DataFrame. The label names in the columns are the events, on which we condition. The label names in the index are the events whose conditional probability given the indexes is in the dataframe.

E.g. The probability $P(A=0|B=1)$ can be retrieved via: `pairwise_conditional_probabilities.as_dataframe((0, 1)).loc['A', 'B']`

Parameters

relevance_configuration: **tuple of length 2** Valid options are (0, 0), (0, 1), (1, 0) and (1, 1). Values of 0 indicate absence of labels and 1 indicates presence of labels. The first value describes the presence for the labels in axis=0 and the second value describes the presence for the labels in axis=1.

For example the matrix values for a relevance configuration of (0, 1) describe the probabilities of absent labels in the index axis given the presence of labels in the column axis.

Returns

pandas.DataFrame The conditional probabilities for the requested *relevance_configuration*. Index and column names allow the interpretation of the values.

2.3.22 Feature Association

class `datarobot.models.FeatureAssociationMatrix` (*strengths:* *Optional[List[Strength]]* = *None*, *features:* *Optional[List[Feature]]* = *None*, *project_id:* *Optional[str]* = *None*)

Feature association statistics for a project.

Note: Projects created prior to v2.17 are not supported by this feature.

Examples

```
import datarobot as dr

# retrieve feature association matrix
feature_association_matrix = dr.FeatureAssociationMatrix.get(project_id)
feature_association_matrix.strengths
feature_association_matrix.features

# retrieve feature association matrix for a metric, association type or a feature_
↪list
feature_association_matrix = dr.FeatureAssociationMatrix.get(
    project_id,
    metric=enums.FEATURE_ASSOCIATION_METRIC.SPEARMAN,
    association_type=enums.FEATURE_ASSOCIATION_TYPE.CORRELATION,
    featurelist_id=featurelist_id,
)
```

Attributes

project_id [str] Id of the associated project.

strengths [list of dict] Pairwise statistics for the available features as structured below.

features [list of dict] Metadata for each feature and where it goes in the matrix.

classmethod `get` (*project_id*: str, *metric*: Optional[str] = None, *association_type*: Optional[str] = None, *featurelist_id*: Optional[str] = None) → datarobot.models.feature_association_matrix.feature_association_matrix.FeatureAssociationMatrix
Get feature association statistics.

Parameters

project_id [str] Id of the project that contains the requested associations.

metric [enums.FEATURE_ASSOCIATION_METRIC] The name of a metric to get pairwise data for. Since v2.19 this is optional and defaults to `enums.FEATURE_ASSOCIATION_METRIC.MUTUAL_INFO`.

association_type [enums.FEATURE_ASSOCIATION_TYPE] The type of dependence for the data. Since v2.19 this is optional and defaults to `enums.FEATURE_ASSOCIATION_TYPE.ASSOCIATION`.

featurelist_id [str or None] Optional, the feature list to lookup FAM data for. By default, depending on the type of the project (Informative Features or Timeseries Informative Features) list will be used. (New in version v2.19)

Returns

FeatureAssociationMatrix Feature association pairwise metric strength data, feature clustering data, and ordering data for Feature Association Matrix visualization.

2.3.23 Feature Association Matrix Details

```
class datarobot.models.FeatureAssociationMatrixDetails (project_id: Optional[str]
                                                    = None, chart_type: Optional[str] = None, values:
                                                    Optional[List[Tuple[Any,
                                                    Any, float]]] = None, features:
                                                    Optional[List[str]]
                                                    = None, types: Optional[List[str]] = None,
                                                    featurelist_id: Optional[str]
                                                    = None)
```

Plotting details for a pair of passed features present in the feature association matrix.

Note: Projects created prior to v2.17 are not supported by this feature.

Attributes

project_id [str] Id of the project that contains the requested associations.

chart_type [str] Which type of plotting the pair of features gets in the UI. e.g. `HORIZONTAL_BOX`, `VERTICAL_BOX`, `SCATTER` or `CONTINGENCY`

values [list] The data triplets for pairwise plotting e.g. `{values: [[460.0, 428.5, 0.001], [1679.3, 259.0, 0.001], ...]}` The first entry of each list is a value of feature1, the second entry of each list is a value of feature2, and the third is the relative frequency of the pair of datapoints in the sample.

features [list] A list of the requested features, [feature1, feature2]

types [list] The type of *feature1* and *feature2*. Possible values: `CATEGORICAL`, `NUMERIC`

featurelist_id [str] Id of the feature list to lookup FAM details for.

```
classmethod get (project_id: str, feature1: str, feature2: str,
                 featurelist_id: Optional[str] = None) →
    datarobot.models.feature_association_matrix.feature_association_matrix_details.FeatureAssociationMatr
```

Get a sample of the actual values used to measure the association between a pair of features

New in version v2.17.

Parameters

project_id [str] Id of the project of interest.

feature1 [str] Feature name for the first feature of interest.

feature2 [str] Feature name for the second feature of interest.

featurelist_id [str] Optional, the feature list to lookup FAM data for. By default, depending on the type of the project `Informative Features` or `Timeseries Informative Features` list will be used.

Returns

FeatureAssociationMatrixDetails The feature association plotting for provided pair of features.

2.3.24 Feature Association Featurelists

```
class datarobot.models.FeatureAssociationFeaturelists (project_id: Optional[str]  
                                                    = None, featurelists: Op-  
                                                    tional[List[FeatureListType]]  
                                                    = None)
```

Featurelists with feature association matrix availability flags for a project.

Attributes

project_id [str] Id of the project that contains the requested associations.

featurelists [list of dict] The featurelists with the *featurelist_id*, *title* and the *has_fam* flag.

```
classmethod get (project_id: str) → datarobot.models.feature_association_matrix.feature_association_featurelists.FeatureAssociationFeaturelists
```

Get featurelists with feature association status for each.

Parameters

project_id [str] Id of the project of interest.

Returns

FeatureAssociationFeaturelists Featurelist with feature association status for each.

2.3.25 Feature Discovery

Relationships Configuration

```
class datarobot.models.RelationshipsConfiguration (id, dataset_definitions=None,  
                                                  relationships=None, fea-  
                                                  ture_discovery_mode=None,  
                                                  feature_discovery_settings=None)
```

A Relationships configuration specifies a set of secondary datasets as well as the relationships among them. It is used to configure Feature Discovery for a project to generate features automatically from these datasets.

Attributes

id [string] Id of the created relationships configuration

dataset_definitions: list Each element is a dataset_definitions for a dataset.

relationships: list Each element is a relationship between two datasets

feature_discovery_mode: str Mode of feature discovery. Supported values are "default" and "manual"

feature_discovery_settings: list List of feature discovery settings used to customize the feature discovery process

The 'dataset_definitions' structure is

identifier: string Alias of the dataset (used directly as part of the generated feature names)

catalog_id: str, or None Identifier of the catalog item

catalog_version_id: str Identifier of the catalog item version

primary_temporal_key: string, optional Name of the column indicating time of record creation

feature_list_id: string, optional Identifier of the feature list. This decides which columns in the dataset are used for feature generation

snapshot_policy: str Policy to use when creating a project or making predictions. Must be one of the following values: `specified`: Use specific snapshot specified by catalogVersionId `latest`: Use latest snapshot from the same catalog item `dynamic`: Get data from the source (only applicable for JDBC datasets)

feature_lists: list List of feature list info

data_source: dict Data source info if the dataset is from data source

data_sources: list List of Data source details for a JDBC datasets

is_deleted: bool, optional Whether the dataset is deleted or not

The ‘data source info‘ structured is

data_store_id: str Id of the data store.

data_store_name [str] User-friendly name of the data store.

url [str] Url used to connect to the data store.

dbtable [str] Name of table from the data store.

schema: str Schema definition of the table from the data store

catalog: str Catalog name of the data source.

The ‘feature list info‘ structure is

id [str] Id of the featurelist

name [str] Name of the featurelist

features [list of str] Names of all the Features in the featurelist

dataset_id [str] Project the featurelist belongs to

creation_date [datetime.datetime] When the featurelist was created

user_created [bool] Whether the featurelist was created by a user or by DataRobot automation

created_by: str Name of user who created it

description [str] Description of the featurelist. Can be updated by the user and may be supplied by default for DataRobot-created featurelists.

dataset_id: str Dataset which is associated with the feature list

dataset_version_id: str or None Version of the dataset which is associated with feature list. Only relevant for Informative features

The ‘relationships‘ schema is

dataset1_identifier: str or None Identifier of the first dataset in this relationship. This is specified in the identifier field of dataset_definition structure. If None, then the relationship is with the primary dataset.

dataset2_identifier: str Identifier of the second dataset in this relationship. This is specified in the identifier field of dataset_definition schema.

dataset1_keys: list of str (max length: 10 min length: 1) Column(s) from the first dataset which are used to join to the second dataset

dataset2_keys: list of str (max length: 10 min length: 1) Column(s) from the second dataset that are used to join to the first dataset

time_unit: str, or None Time unit of the feature derivation window. Supported values are `MILLISECOND`, `SECOND`, `MINUTE`, `HOUR`, `DAY`, `WEEK`, `MONTH`, `QUARTER`, `YEAR`. If present, the feature engineering Graph will perform time-aware joins.

feature_derivation_window_start: int, or None How many `time_units` of each dataset's primary temporal key into the past relative to the `datetimePartitionColumn` the feature derivation window should begin. Will be a negative integer, If present, the feature engineering Graph will perform time-aware joins.

feature_derivation_window_end: int, or None How many `timeUnits` of each dataset's record primary temporal key into the past relative to the `datetimePartitionColumn` the feature derivation window should end. Will be a non-positive integer, if present. If present, the feature engineering Graph will perform time-aware joins.

feature_derivation_window_time_unit: int or None Time unit of the feature derivation window. Supported values are `MILLISECOND`, `SECOND`, `MINUTE`, `HOUR`, `DAY`, `WEEK`, `MONTH`, `QUARTER`, `YEAR` If present, time-aware joins will be used. Only applicable when `datasetIdentifier` is not provided.

feature_derivation_windows: list of dict, or None List of feature derivation windows settings. If present, time-aware joins will be used. Only allowed when `feature_derivation_window_start`, `feature_derivation_window_end` and `feature_derivation_window_time_unit` are not provided.

prediction_point_rounding: int, or None Closest value of `prediction_point_rounding_time_unit` to round the prediction point into the past when applying the feature derivation window. Will be a positive integer, if present. Only applicable when `datasetIdentifier` is not provided.

prediction_point_rounding_time_unit: str, or None time unit of the prediction point rounding. Supported values are `MILLISECOND`, `SECOND`, `MINUTE`, `HOUR`, `DAY`, `WEEK`, `MONTH`, `QUARTER`, `YEAR` Only applicable when `datasetIdentifier` is not provided.

The 'feature_derivation_windows' is a list of dictionary with schema:

start: int How many `time_units` of each dataset's primary temporal key into the past relative to the `datetimePartitionColumn` the feature derivation window should begin.

end: int How many `timeUnits` of each dataset's record primary temporal key into the past relative to the `datetimePartitionColumn` the feature derivation window should end.

unit: string Time unit of the feature derivation window. One of `datarobot.enums.AllowedTimeUnits.SAFER`.

The 'feature_discovery_settings' structure is:

name: str Name of the feature discovery setting

value: bool Value of the feature discovery setting

To see the list of possible settings, create a `RelationshipConfiguration` without specifying settings and check its `'feature_discovery_settings'` attribute, which is a list of possible settings with their default values.

classmethod create (*dataset_definitions, relationships, feature_discovery_settings=None*)
Create a `Relationships Configuration`

Parameters

dataset_definitions: list of dataset definitions Each element is a `datarobot.helpers.feature_discovery.DatasetDefinition`

relationships: list of relationships Each element is a `datarobot.helpers.feature_discovery.Relationship`

feature_discovery_settings [list of feature discovery settings, optional] Each element is a dictionary or a `datarobot.helpers.feature_discovery.FeatureDiscoverySetting`. If not provided, default settings will be used.

Returns

relationships_configuration: RelationshipsConfiguration Created relationships configuration

Examples

```
dataset_definition = dr.DatasetDefinition(
    identifier='profile',
    catalog_id='5fd06b4af24c641b68e4d88f',
    catalog_version_id='5fd06b4af24c641b68e4d88f'
)
relationship = dr.Relationship(
    dataset2_identifier='profile',
    dataset1_keys=['CustomerID'],
    dataset2_keys=['CustomerID'],
    feature_derivation_window_start=-14,
    feature_derivation_window_end=-1,
    feature_derivation_window_time_unit='DAY',
    prediction_point_rounding=1,
    prediction_point_rounding_time_unit='DAY'
)
dataset_definitions = [dataset_definition]
relationships = [relationship]
relationship_config = dr.RelationshipsConfiguration.create(
    dataset_definitions=dataset_definitions,
    relationships=relationships,
    feature_discovery_settings = [
        {'name': 'enable_categorical_statistics', 'value': True},
        {'name': 'enable_numeric_skewness', 'value': True},
    ]
)
>>> relationship_config.id
'5c88a37770fc42a2fcc62759'
```

get()

Retrieve the Relationships configuration for a given id

Returns

relationships_configuration: RelationshipsConfiguration The requested relationships configuration

Raises

ClientError Raised if an invalid relationships config id is provided.

Examples

```
relationships_config = dr.RelationshipsConfiguration(valid_config_id)
result = relationships_config.get()
>>> result.id
'5c88a37770fc42a2fcc62759'
```

replace (*dataset_definitions*, *relationships*, *feature_discovery_settings=None*)
Update the Relationships Configuration which is not used in the feature discovery Project

Parameters

dataset_definitions: list of dataset definition Each element is a `datarobot.helpers.feature_discovery.DatasetDefinition`

relationships: list of relationships Each element is a `datarobot.helpers.feature_discovery.Relationship`

feature_discovery_settings [list of feature discovery settings, optional] Each element is a dictionary or a `datarobot.helpers.feature_discovery.FeatureDiscoverySetting`. If not provided, default settings will be used.

Returns

relationships_configuration: **RelationshipsConfiguration** the updated relationships configuration

delete ()
Delete the Relationships configuration

Raises

ClientError Raised if an invalid relationships config id is provided.

Examples

```
# Deleting with a valid id
relationships_config = dr.RelationshipsConfiguration(valid_config_id)
status_code = relationships_config.delete()
status_code
>>> 204
relationships_config.get()
>>> ClientError: Relationships Configuration not found
```

Dataset Definition

```
class datarobot.helpers.feature_discovery.DatasetDefinition (identifier: str,
                                                           catalog_id: Optional[str],
                                                           catalog_version_id: str,
                                                           snapshot_policy:
                                                           str = 'latest',
                                                           feature_list_id:
                                                           Optional[str]
                                                           = None,
                                                           primary_temporal_key:
                                                           Optional[str] =
                                                           None)
```

Dataset definition for the Feature Discovery

New in version v2.25.

Examples

```
import datarobot as dr
dataset_definition = dr.DatasetDefinition(
    identifier='profile',
    catalog_id='5ec4aec1f072bc028e3471ae',
    catalog_version_id='5ec4aec2f072bc028e3471b1',
)

dataset_definition = dr.DatasetDefinition(
    identifier='transaction',
    catalog_id='5ec4aec1f072bc028e3471ae',
    catalog_version_id='5ec4aec2f072bc028e3471b1',
    primary_temporal_key='Date'
)
```

Attributes

identifier: string Alias of the dataset (used directly as part of the generated feature names)

catalog_id: string, optional Identifier of the catalog item

catalog_version_id: string Identifier of the catalog item version

primary_temporal_key: string, optional Name of the column indicating time of record creation

feature_list_id: string, optional Identifier of the feature list. This decides which columns in the dataset are used for feature generation

snapshot_policy: string, optional Policy to use when creating a project or making predictions. If omitted, by default endpoint will use "latest". Must be one of the following values: "specified": Use specific snapshot specified by catalogVersionId "latest": Use latest snapshot from the same catalog item "dynamic": Get data from the source (only applicable for JDBC datasets)

Relationship

```
class datarobot.helpers.feature_discovery.Relationship (dataset2_identifier: str,
dataset1_keys: List[str],
dataset2_keys: List[str],
dataset1_identifier: Optional[str] = None, feature_derivation_window_start:
Optional[int] = None, feature_derivation_window_end:
Optional[int] = None, feature_derivation_window_time_unit:
Optional[int] = None, feature_derivation_windows:
Optional[List[Dict[str,
Union[int, str]]]]
= None, prediction_point_rounding:
Optional[int] = None, prediction_point_rounding_time_unit:
Optional[str] = None)
```

Relationship between dataset defined in DatasetDefinition

New in version v2.25.

Examples

```
import datarobot as dr
relationship = dr.Relationship(
    dataset1_identifier='profile',
    dataset2_identifier='transaction',
    dataset1_keys=['CustomerID'],
    dataset2_keys=['CustomerID']
)

relationship = dr.Relationship(
    dataset2_identifier='profile',
    dataset1_keys=['CustomerID'],
    dataset2_keys=['CustomerID'],
    feature_derivation_window_start=-14,
    feature_derivation_window_end=-1,
    feature_derivation_window_time_unit='DAY',
    prediction_point_rounding=1,
    prediction_point_rounding_time_unit='DAY'
)
```

Attributes

dataset1_identifier: **string, optional** Identifier of the first dataset in this relationship. This is specified in the identifier field of dataset_definition structure. If None, then the relationship is with the primary dataset.

dataset2_identifier: **string** Identifier of the second dataset in this relationship. This is specified in the identifier field of dataset_definition schema.

dataset1_keys: list of string (max length: 10 min length: 1) Column(s) from the first dataset which are used to join to the second dataset

dataset2_keys: list of string (max length: 10 min length: 1) Column(s) from the second dataset that are used to join to the first dataset

feature_derivation_window_start: int, or None How many time_units of each dataset's primary temporal key into the past relative to the datetimePartitionColumn the feature derivation window should begin. Will be a negative integer, If present, the feature engineering Graph will perform time-aware joins.

feature_derivation_window_end: int, optional How many timeUnits of each dataset's record primary temporal key into the past relative to the datetimePartitionColumn the feature derivation window should end. Will be a non-positive integer, if present. If present, the feature engineering Graph will perform time-aware joins.

feature_derivation_window_time_unit: int, optional Time unit of the feature derivation window. One of `datarobot.enums.AllowedTimeUnitsSAFER` If present, time-aware joins will be used. Only applicable when `dataset1_identifier` is not provided.

feature_derivation_windows: list of dict, or None List of feature derivation windows settings. If present, time-aware joins will be used. Only allowed when `feature_derivation_window_start`, `feature_derivation_window_end` and `feature_derivation_window_time_unit` are not provided.

prediction_point_rounding: int, optional Closest value of `prediction_point_rounding_time_unit` to round the prediction point into the past when applying the feature derivation window. Will be a positive integer, if present. Only applicable when `dataset1_identifier` is not provided.

prediction_point_rounding_time_unit: string, optional Time unit of the prediction point rounding. One of `datarobot.enums.AllowedTimeUnitsSAFER` Only applicable when `dataset1_identifier` is not provided.

The 'feature_derivation_windows' is a list of dictionary with schema:

start: int How many time_units of each dataset's primary temporal key into the past relative to the datetimePartitionColumn the feature derivation window should begin.

end: int How many timeUnits of each dataset's record primary temporal key into the past relative to the datetimePartitionColumn the feature derivation window should end.

unit: string Time unit of the feature derivation window. One of `datarobot.enums.AllowedTimeUnitsSAFER`.

Feature Lineage

class `datarobot.models.FeatureLineage` (*steps=None*)

Lineage of an automatically engineered feature.

Attributes

steps: list list of steps which were applied to build the feature.

'steps' structure is:

id [int] step id starting with 0.

step_type: str one of the data/action/json/generatedData.

name: str name of the step.

description: **str** description of the step.

parents: **list[int]** references to other steps id.

is_time_aware: **bool** indicator of step being time aware. Mandatory only for *action* and *join* steps. *action* step provides additional information about feature derivation window in the *timeInfo* field.

catalog_id: **str** id of the catalog for a *data* step.

catalog_version_id: **str** id of the catalog version for a *data* step.

group_by: **list[str]** list of columns which this *action* step aggregated by.

columns: **list** names of columns involved into the feature generation. Available only for *data* steps.

time_info: **dict** description of the feature derivation window which was applied to this *action* step.

join_info: **list[dict]** *join* step details.

‘columns‘ structure is

data_type: **str** the type of the feature, e.g. `“Categorical”`, `“Text”`

is_input: **bool** indicates features which provided data to transform in this lineage.

name: **str** feature name.

is_cutoff: **bool** indicates a cutoff column.

‘time_info‘ structure is:

latest: **dict** end of the feature derivation window applied.

duration: **dict** size of the feature derivation window applied.

‘latest‘ and ‘duration‘ structure is:

time_unit: **str** time unit name like `“MINUTE”`, `“DAY”`, `“MONTH”` etc.

duration: **int** value/size of this duration object.

‘join_info‘ structure is:

join_type: **str** kind of join, left/right.

left_table: **dict** information about a dataset which was considered as left.

right_table: **str** information about a dataset which was considered as right.

‘left_table‘ and ‘right_table‘ structure is:

columns: **list[str]** list of columns which datasets were joined by.

datasteps: **list[int]** list of *data* steps id which brought the *columns* into the current step dataset.

classmethod **get** (*project_id*, *id*)
Retrieve a single FeatureLineage.

Parameters

project_id [str] The id of the project the feature belongs to

id [str] id of a feature lineage to retrieve

Returns

lineage [FeatureLineage] The queried instance

Secondary Dataset Configurations

```

class datarobot.models.SecondaryDatasetConfigurations (id: str, project_id:
str, config: Optional[List[DatasetConfiguration]]
= None, secondary_datasets: Optional[List[SecondaryDataset]]
= None, name: Optional[str]
= None, creator_full_name:
Optional[str] = None, cre-
ator_user_id: Optional[str]
= None, created: Op-
tional[datetime] = None,
featurelist_id: Optional[str]
= None, credential_ids:
Optional[StoredCredentials]
= None, is_default: Op-
tional[bool] = None,
project_version: Op-
tional[str] = None)

```

Create secondary dataset configurations for a given project

New in version v2.20.

Attributes

id [str] Id of this secondary dataset configuration

project_id [str] Id of the associated project.

config: list of DatasetConfiguration (Deprecated in version v2.23) List of secondary dataset configurations

secondary_datasets: list of SecondaryDataset (new in v2.23) List of secondary datasets (secondaryDataset)

name: str Verbose name of the SecondaryDatasetConfig. null if it wasn't specified.

created: datetime.datetime DR-formatted datetime. null for legacy (before DR 6.0) db records.

creator_user_id: str Id of the user created this config.

creator_full_name: str fullname or email of the user created this config.

featurelist_id: str, optional Id of the feature list. null if it wasn't specified.

credential_ids: list of DatasetsCredentials, optional credentials used by the secondary datasets if the datasets used in the configuration are from datasource

is_default: bool, optional Boolean flag if default config created during feature discovery aim

project_version: str, optional Version of project when its created (Release version)

```

classmethod create (project_id: str, secondary_datasets: List[datarobot.helpers.feature_discovery.SecondaryDataset],
name: str, featurelist_id: Optional[str] = None) →
datarobot.models.secondary_dataset.SecondaryDatasetConfigurations
create secondary dataset configurations

```

New in version v2.20.

Parameters

project_id [str] id of the associated project.

secondary_datasets: list of **SecondaryDataset** (New in version v2.23) list of secondary datasets used by the configuration each element is a `datarobot.helpers.feature_discovery.SecondaryDataset`

name: str (New in version v2.23) Name of the secondary datasets configuration

featurelist_id: str, or None (New in version v2.23) Id of the featurelist

Returns

an instance of **SecondaryDatasetConfigurations**

Raises

ClientError raised if incorrect configuration parameters are provided

Examples

```
profile_secondary_dataset = dr.SecondaryDataset (
    identifier='profile',
    catalog_id='5ec4aec1f072bc028e3471ae',
    catalog_version_id='5ec4aec2f072bc028e3471b1',
    snapshot_policy='latest'
)

transaction_secondary_dataset = dr.SecondaryDataset (
    identifier='transaction',
    catalog_id='5ec4aec268f0f30289a03901',
    catalog_version_id='5ec4aec268f0f30289a03900',
    snapshot_policy='latest'
)

secondary_datasets = [profile_secondary_dataset, transaction_secondary_
↪dataset]
new_secondary_dataset_config = dr.SecondaryDatasetConfigurations.create (
    project_id=project.id,
    name='My config',
    secondary_datasets=secondary_datasets
)

>>> new_secondary_dataset_config.id
'5fd1e86c589238a4e635e93d'
```

delete () → None

Removes the Secondary datasets configuration

New in version v2.21.

Raises

ClientError Raised if an invalid or already deleted secondary dataset config id is provided

Examples

```
# Deleting with a valid secondary_dataset_config id
status_code = dr.SecondaryDatasetConfigurations.delete(some_config_id)
```

(continues on next page)

(continued from previous page)

```
status_code
>>> 204
```

get () → datarobot.models.secondary_dataset.SecondaryDatasetConfigurations
Retrieve a single secondary dataset configuration for a given id

New in version v2.21.

Returns

secondary_dataset_configurations [SecondaryDatasetConfigurations] The requested secondary dataset configurations

Examples

```
config_id = '5fd1e86c589238a4e635e93d'
secondary_dataset_config = dr.SecondaryDatasetConfigurations(id=config_id).
↳get()
>>> secondary_dataset_config
{
  'created': datetime.datetime(2020, 12, 9, 6, 16, 22, tzinfo=tzutc()),
  'creator_full_name': u'abc@datarobot.com',
  'creator_user_id': u'asdf4af1gf4bdsd2fbalde0a',
  'credential_ids': None,
  'featurelist_id': None,
  'id': u'5fd1e86c589238a4e635e93d',
  'is_default': True,
  'name': u'My config',
  'project_id': u'5fd06afce2456ec1e9d20457',
  'project_version': None,
  'secondary_datasets': [
    {
      'snapshot_policy': u'latest',
      'identifier': u'profile',
      'catalog_version_id': u'5fd06b4af24c641b68e4d88f',
      'catalog_id': u'5fd06b4af24c641b68e4d88e'
    },
    {
      'snapshot_policy': u'dynamic',
      'identifier': u'transaction',
      'catalog_version_id': u'5fd1e86c589238a4e635e98e',
      'catalog_id': u'5fd1e86c589238a4e635e98d'
    }
  ]
}
```

classmethod list (*project_id*: str, *featurelist_id*: Optional[str] = None, *limit*: Optional[int] = None, *offset*: Optional[int] = None) → List[datarobot.models.secondary_dataset.SecondaryDatasetConfigurations]

Returns list of secondary dataset configurations.

New in version v2.23.

Parameters

project_id: str The Id of project

featurelist_id: str, optional Id of the feature list to filter the secondary datasets configurations

Returns

secondary_dataset_configurations [list of SecondaryDatasetConfigurations] The requested list of secondary dataset configurations for a given project

Examples

```
pid = '5fd06afce2456ec1e9d20457'
secondary_dataset_configs = dr.SecondaryDatasetConfigurations.list(pid)
>>> secondary_dataset_configs[0]
{
    'created': datetime.datetime(2020, 12, 9, 6, 16, 22, tzinfo=tzutc()),
    'creator_full_name': u'abc@datarobot.com',
    'creator_user_id': u'asdf4af1gf4bdsd2fbalde0a',
    'credential_ids': None,
    'featurelist_id': None,
    'id': u'5fd1e86c589238a4e635e93d',
    'is_default': True,
    'name': u'My config',
    'project_id': u'5fd06afce2456ec1e9d20457',
    'project_version': None,
    'secondary_datasets': [
        {
            'snapshot_policy': u'latest',
            'identifier': u'profile',
            'catalog_version_id': u'5fd06b4af24c641b68e4d88f',
            'catalog_id': u'5fd06b4af24c641b68e4d88e'
        },
        {
            'snapshot_policy': u'dynamic',
            'identifier': u'transaction',
            'catalog_version_id': u'5fd1e86c589238a4e635e98e',
            'catalog_id': u'5fd1e86c589238a4e635e98d'
        }
    ]
}
```

Secondary Dataset

class datarobot.helpers.feature_discovery.**SecondaryDataset** (*identifier*: str, *catalog_id*: str, *catalog_version_id*: str, *snapshot_policy*: str = 'latest')

A secondary dataset to be used for feature discovery

New in version v2.25.

Examples

```
import datarobot as dr
dataset_definition = dr.SecondaryDataset(
    identifier='profile',
    catalog_id='5ec4aec1f072bc028e3471ae',
    catalog_version_id='5ec4aec2f072bc028e3471b1',
)
```

Attributes

identifier: string Alias of the dataset (used directly as part of the generated feature names)

catalog_id: string Identifier of the catalog item

catalog_version_id: string Identifier of the catalog item version

snapshot_policy: string, optional Policy to use while creating a project or making predictions. If omitted, by default endpoint will use `latest`. Must be one of the following values:
`specified`: Use specific snapshot specified by `catalogVersionId`
`latest`: Use latest snapshot from the same catalog item
`dynamic`: Get data from the source (only applicable for JDBC datasets)

2.3.26 Feature Effects

class `datarobot.models.FeatureEffects` (*project_id, model_id, source, feature_effects, back-test_index=None*)

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Notes

`featureEffects` is a dict containing the following:

- `feature_name` (string) Name of the feature
- `feature_type` (string) `dr.enums.FEATURE_TYPE`, Feature type either numeric, categorical or datetime
- `feature_impact_score` (float) Feature impact score
- `weight_label` (string) optional, Weight label if configured for the project else null
- `partial_dependence` (List) Partial dependence results
- `predicted_vs_actual` (List) optional, Predicted versus actual results, may be omitted if there are insufficient qualified samples

partial_dependence is a dict containing the following:

- `is_capped` (bool) Indicates whether the data for computation is capped
- `data` (List) partial dependence results in the following format

data is a list of dict containing the following:

- `label` (string) Contains label for categorical and numeric features as string
- `dependence` (float) Value of partial dependence

predicted_vs_actual is a dict containing the following:

- `is_capped` (bool) Indicates whether the data for computation is capped
- `data` (List) pred vs actual results in the following format

data is a list of dict containing the following:

- `label` (string) Contains label for categorical features for numeric features contains range or numeric value.
- `bin` (List) optional, For numeric features contains labels for left and right bin limits
- `predicted` (float) Predicted value
- `actual` (float) Actual value. Actual value is null for unsupervised timeseries models
- `row_count` (int or float) Number of rows for the label and bin. Type is float if weight or exposure is set for the project.

Attributes

project_id: string The project that contains requested model

model_id: string The model to retrieve Feature Effects for

source: string The source to retrieve Feature Effects for

feature_effects: list Feature Effects for every feature

backtest_index: string, required only for `DatetimeModels`, The backtest index to retrieve Feature Effects for.

classmethod `from_server_data` (*data*, *args, **kwargs)

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing.

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

class `datarobot.models.FeatureEffectMetadata` (*status*, *sources*)
Feature Effect Metadata for model, contains status and available model sources.

Notes

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

class `datarobot.models.FeatureEffectMetadataDatetime` (*data*)
Feature Effect Metadata for datetime model, contains list of feature effect metadata per backtest.

Notes

feature effect metadata per backtest contains:

- `status`: string.
- `backtest_index`: string.
- `sources`: list(string).

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

backtest_index is expected parameter to submit compute request and retrieve Feature Effect. One of provided backtest indexes shall be used.

Attributes

data [list[FeatureEffectMetadataDatetimePerBacktest]] List feature effect metadata per backtest

class datarobot.models.**FeatureEffectMetadataDatetimePerBacktest** (*ff_metadata_datetime_per_backtest*)
Convert dictionary into feature effect metadata per backtest which contains backtest_index, status and sources.

2.3.27 Feature Fit

class datarobot.models.**FeatureFit** (*project_id, model_id, source, feature_fit, backtest_index=None*)

Feature Fit provides partial dependence and predicted vs actual values for top-500 features ordered by feature importance score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Notes

featureFit is a dict containing the following:

- *feature_name* (string) Name of the feature
- *feature_type* (string) *dr.enums.FEATURE_TYPE*, Feature type either numeric, categorical or datetime
- *feature_importance_score* (float) Feature importance score
- *weight_label* (string) optional, Weight label if configured for the project else null
- *partial_dependence* (List) Partial dependence results
- *predicted_vs_actual* (List) optional, Predicted versus actual results, may be omitted if there are insufficient qualified samples

partial_dependence is a dict containing the following:

- *is_capped* (bool) Indicates whether the data for computation is capped
- *data* (List) partial dependence results in the following format

data is a list of dict containing the following:

- *label* (string) Contains label for categorical and numeric features as string
- *dependence* (float) Value of partial dependence

predicted_vs_actual is a dict containing the following:

- *is_capped* (bool) Indicates whether the data for computation is capped
- *data* (List) pred vs actual results in the following format

data is a list of dict containing the following:

- *label* (string) Contains label for categorical features for numeric features contains range or numeric value.

- `bin` (List) optional, For numeric features contains labels for left and right bin limits
- `predicted` (float) Predicted value
- `actual` (float) Actual value. Actual value is null for unsupervised timeseries models
- `row_count` (int or float) Number of rows for the label and bin. Type is float if weight or exposure is set for the project.

Attributes

project_id: `string` The project that contains requested model

model_id: `string` The model to retrieve Feature Fit for

source: `string` The source to retrieve Feature Fit for

feature_fit: `list` Feature Fit data for every feature

backtest_index: `string, required only for DatetimeModels`, The backtest index to retrieve Feature Fit for.

classmethod `from_server_data` (*data*, *args, **kwargs)

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing.

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

class `datarobot.models.FeatureFitMetadata` (*status*, *sources*)
Feature Fit Metadata for model, contains status and available model sources.

Notes

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

class `datarobot.models.FeatureFitMetadataDatetime` (*data*)
Feature Fit Metadata for datetime model, contains list of feature fit metadata per backtest.

Notes

feature fit metadata per backtest contains:

- `status`: `string`.
- `backtest_index`: `string`.
- `sources`: `list(string)`.

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

backtest_index is expected parameter to submit compute request and retrieve Feature Fit. One of provided backtest indexes shall be used.

Attributes

data [list[FeatureFitMetadataDatetimePerBacktest]] list feature fit metadata per backtest

class `datarobot.models.FeatureFitMetadataDatetimePerBacktest` (*ff_metadata_datetime_per_backtest*)
Convert dictionary into feature fit metadata per backtest which contains `backtest_index`, `status` and `sources`.

2.3.28 Feature List

```
class datarobot.DatasetFeaturelist (id: Optional[str] = None, name: Optional[str] = None,
features: Optional[List[str]] = None, dataset_id: Optional[str] = None, dataset_version_id: Optional[str] = None,
creation_date: Optional[datetime.datetime] = None, created_by: Optional[str] = None, user_created: Optional[bool] = None,
description: Optional[str] = None)
```

A set of features attached to a dataset in the AI Catalog

Attributes

id [str] the id of the dataset featurelist

dataset_id [str] the id of the dataset the featurelist belongs to

dataset_version_id: str, optional the version id of the dataset this featurelist belongs to

name [str] the name of the dataset featurelist

features [list of str] a list of the names of features included in this dataset featurelist

creation_date [datetime.datetime] when the featurelist was created

created_by [str] the user name of the user who created this featurelist

user_created [bool] whether the featurelist was created by a user or by DataRobot automation

description [str, optional] the description of the featurelist. Only present on DataRobot-created featurelists.

```
classmethod get (dataset_id: str, featurelist_id: str) → TDatasetFeaturelist
Retrieve a dataset featurelist
```

Parameters

dataset_id [str] the id of the dataset the featurelist belongs to

featurelist_id [str] the id of the dataset featurelist to retrieve

Returns

featurelist [DatasetFeatureList] the specified featurelist

```
delete () → None
```

Delete a dataset featurelist

Featurelists configured into the dataset as a default featurelist cannot be deleted.

```
update (name: Optional[str] = None) → None
```

Update the name of an existing featurelist

Note that only user-created featurelists can be renamed, and that names must not conflict with names used by other featurelists.

Parameters

name [str, optional] the new name for the featurelist

```
class datarobot.models.Featurelist (id: Optional[str] = None, name: Optional[str] = None,
features: Optional[List[str]] = None, project_id: Optional[str] = None, created: Optional[datetime.datetime] = None,
is_user_created: Optional[bool] = None, num_models: Optional[int] = None, description: Optional[str] = None)
```

A set of features used in modeling

Attributes

id [str] the id of the featurelist

name [str] the name of the featurelist

features [list of str] the names of all the Features in the featurelist

project_id [str] the project the featurelist belongs to

created [datetime.datetime] (New in version v2.13) when the featurelist was created

is_user_created [bool] (New in version v2.13) whether the featurelist was created by a user or by DataRobot automation

num_models [int] (New in version v2.13) the number of models currently using this featurelist. A model is considered to use a featurelist if it is used to train the model or as a monotonic constraint featurelist, or if the model is a blender with at least one component model using the featurelist.

description [str] (New in version v2.13) the description of the featurelist. Can be updated by the user and may be supplied by default for DataRobot-created featurelists.

classmethod from_data (*data: ServerDataDictType*) → TFeaturelist
Overrides the parent method to ensure description is always populated

Parameters

data [dict] the data from the server, having gone through processing

classmethod get (*project_id: str, featurelist_id: str*) → TFeaturelist
Retrieve a known feature list

Parameters

project_id [str] The id of the project the featurelist is associated with

featurelist_id [str] The ID of the featurelist to retrieve

Returns

featurelist [Featurelist] The queried instance

Raises

ValueError passed `project_id` parameter value is of not supported type

delete (*dry_run: bool = False, delete_dependencies: bool = False*) → DeleteFeatureListResult
Delete a featurelist, and any models and jobs using it

All models using a featurelist, whether as the training featurelist or as a monotonic constraint featurelist, will also be deleted when the deletion is executed and any queued or running jobs using it will be cancelled. Similarly, predictions made on these models will also be deleted. All the entities that are to be deleted with a featurelist are described as “dependencies” of it. To preview the results of deleting a featurelist, call `delete` with `dry_run=True`

When deleting a featurelist with dependencies, users must specify `delete_dependencies=True` to confirm they want to delete the featurelist and all its dependencies. Without that option, only featurelists with no dependencies may be successfully deleted and others will error.

Featurelists configured into the project as a default featurelist or as a default monotonic constraint featurelist cannot be deleted.

Featurelists used in a model deployment cannot be deleted until the model deployment is deleted.

Parameters

dry_run [bool, optional] specify True to preview the result of deleting the featurelist, instead of actually deleting it.

delete_dependencies [bool, optional] specify True to successfully delete featurelists with dependencies; if left False by default, featurelists without dependencies can be successfully deleted and those with dependencies will error upon attempting to delete them.

Returns

result [dict]

A dictionary describing the result of deleting the featurelist, with the following keys

- **dry_run** : bool, whether the deletion was a dry run or an actual deletion
- **can_delete** : bool, whether the featurelist can actually be deleted
- **deletion_blocked_reason** : str, why the featurelist can't be deleted (if it can't)
- **num_affected_models** : int, the number of models using this featurelist
- **num_affected_jobs** : int, the number of jobs using this featurelist

classmethod from_server_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]], keep_attrs: Optional[Iterable[str]] = None*) → T

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

update (*name: Optional[str] = None, description: Optional[str] = None*) → None

Update the name or description of an existing featurelist

Note that only user-created featurelists can be renamed, and that names must not conflict with names used by other featurelists.

Parameters

name [str, optional] the new name for the featurelist

description [str, optional] the new description for the featurelist

class `datarobot.models.ModelingFeaturelist` (*id: Optional[str] = None, name: Optional[str] = None, features: Optional[List[str]] = None, project_id: Optional[str] = None, created: Optional[datetime.datetime] = None, is_user_created: Optional[bool] = None, num_models: Optional[int] = None, description: Optional[str] = None*)

A set of features that can be used to build a model

In time series projects, a new set of modeling features is created after setting the partitioning options. These features are automatically derived from those in the project's dataset and are the features used for modeling. Modeling features are only accessible once the target and partitioning options have been set. In projects that don't use time series modeling, once the target has been set, ModelingFeaturelists and Featurelists will behave the same.

For more information about input and modeling features, see the [time series documentation](#).

Attributes

id [str] the id of the modeling featurelist

project_id [str] the id of the project the modeling featurelist belongs to

name [str] the name of the modeling featurelist

features [list of str] a list of the names of features included in this modeling featurelist

created [datetime.datetime] (New in version v2.13) when the featurelist was created

is_user_created [bool] (New in version v2.13) whether the featurelist was created by a user or by DataRobot automation

num_models [int] (New in version v2.13) the number of models currently using this featurelist. A model is considered to use a featurelist if it is used to train the model or as a monotonic constraint featurelist, or if the model is a blender with at least one component model using the featurelist.

description [str] (New in version v2.13) the description of the featurelist. Can be updated by the user and may be supplied by default for DataRobot-created featurelists.

classmethod **get** (*project_id: str, featurelist_id: str*) → TModelingFeaturelist
Retrieve a modeling featurelist

Modeling featurelists can only be retrieved once the target and partitioning options have been set.

Parameters

project_id [str] the id of the project the modeling featurelist belongs to

featurelist_id [str] the id of the modeling featurelist to retrieve

Returns

featurelist [ModelingFeaturelist] the specified featurelist

delete (*dry_run: bool = False, delete_dependencies: bool = False*) → DeleteFeatureListResult
Delete a featurelist, and any models and jobs using it

All models using a featurelist, whether as the training featurelist or as a monotonic constraint featurelist, will also be deleted when the deletion is executed and any queued or running jobs using it will be cancelled. Similarly, predictions made on these models will also be deleted. All the entities that are to be deleted with a featurelist are described as `dependencies` of it. To preview the results of deleting a featurelist, call `delete` with `dry_run=True`

When deleting a featurelist with dependencies, users must specify `delete_dependencies=True` to confirm they want to delete the featurelist and all its dependencies. Without that option, only featurelists with no dependencies may be successfully deleted and others will error.

Featurelists configured into the project as a default featurelist or as a default monotonic constraint featurelist cannot be deleted.

Featurelists used in a model deployment cannot be deleted until the model deployment is deleted.

Parameters

dry_run [bool, optional] specify True to preview the result of deleting the featurelist, instead of actually deleting it.

delete_dependencies [bool, optional] specify True to successfully delete featurelists with dependencies; if left False by default, featurelists without dependencies can be successfully deleted and those with dependencies will error upon attempting to delete them.

Returns**result** [dict]**A dictionary describing the result of deleting the featurelist, with the following keys**

- **dry_run** : bool, whether the deletion was a dry run or an actual deletion
- **can_delete** : bool, whether the featurelist can actually be deleted
- **deletion_blocked_reason** : str, why the featurelist can't be deleted (if it can't)
- **num_affected_models** : int, the number of models using this featurelist
- **num_affected_jobs** : int, the number of jobs using this featurelist

update (*name*: Optional[str] = None, *description*: Optional[str] = None) → None

Update the name or description of an existing featurelist

Note that only user-created featurelists can be renamed, and that names must not conflict with names used by other featurelists.

Parameters**name** [str, optional] the new name for the featurelist**description** [str, optional] the new description for the featurelist

2.3.29 Restoring Discarded Features

```
class datarobot.models.restore_discarded_features.DiscardedFeaturesInfo (total_restore_limit:
                                                                    int,
                                                                    re-
                                                                    main-
                                                                    ing_restore_limit:
                                                                    int,
                                                                    count:
                                                                    int,
                                                                    fea-
                                                                    tures:
                                                                    List[str])
```

An object containing information about time series features which were reduced during time series feature generation process. These features can be restored back to the project. They will be included into All Time Series Features and can be used to create new feature lists.

New in version v2.27.

Attributes**total_restore_limit** [int] The total limit indicating how many features can be restored in this project.**remaining_restore_limit** [int] The remaining available number of the features which can be restored in this project.**features** [list of strings] Discarded features which can be restored.**count** [int] Discarded features count.

classmethod restore (*project_id: str, features_to_restore: List[str], max_wait: int = 600*) → `datarobot.models.restore_discarded_features.FeatureRestorationStatus`
Restore discarded during time series feature generation process features back to the project. After restoration features will be included into All Time Series Features.

New in version v2.27.

Parameters

project_id: string

features_to_restore: list of strings List of the feature names to restore

max_wait: int, optional max time to wait for features to be restored. Defaults to 10 min

Returns

status: `FeatureRestorationStatus` information about features which were restored and which were not.

classmethod retrieve (*project_id: str*) → `datarobot.models.restore_discarded_features.DiscardedFeaturesInfo`
Retrieve the discarded features information for a given project.

New in version v2.27.

Parameters

project_id: string

Returns

info: `DiscardedFeaturesInfo` information about features which were discarded during feature generation process and limits how many features can be restored.

2.3.30 Job

class `datarobot.models.Job` (*data: Dict[str, Any], completed_resource_url: Optional[str] = None*)
Tracks asynchronous work being done within a project

Attributes

id [int] the id of the job

project_id [str] the id of the project the job belongs to

status [str] the status of the job - will be one of `datarobot.enums.QUEUE_STATUS`

job_type [str] what kind of work the job is doing - will be one of `datarobot.enums.JOB_TYPE`

is_blocked [bool] if true, the job is blocked (cannot be executed) until its dependencies are resolved

classmethod get (*project_id: str, job_id: str*) → `datarobot.models.job.Job`
Fetches one job.

Parameters

project_id [str] The identifier of the project in which the job resides

job_id [str] The job id

Returns

job [Job] The job

Raises

AsyncFailureError Querying this resource gave a status code other than 200 or 303

cancel ()

Cancel this job. If this job has not finished running, it will be removed and canceled.

get_result (params=None)**Parameters**

params [dict or None] Query parameters to be added to request to get results.

For featureEffects and featureFit, source param is required to define source, otherwise the default is ‘training‘

Returns

result [object]

Return type depends on the job type:

- for model jobs, a Model is returned
- for predict jobs, a pandas.DataFrame (with predictions) is returned
- for featureImpact jobs, a list of dicts by default (see `with_metadata` parameter of the `FeatureImpactJob` class and its `get ()` method).
- for primeRulesets jobs, a list of Rulesets
- for primeModel jobs, a PrimeModel
- for primeDownloadValidation jobs, a PrimeFile
- for predictionExplanationInitialization jobs, a PredictionExplanationsInitialization
- for predictionExplanations jobs, a PredictionExplanations
- for featureEffects, a FeatureEffects
- for featureFit, a FeatureFit

Raises

JobNotFinished If the job is not finished, the result is not available.

AsyncProcessUnsuccessfulError If the job errored or was aborted

get_result_when_complete (max_wait=600, params=None)**Parameters**

max_wait [int, optional] How long to wait for the job to finish.

params [dict, optional] Query parameters to be added to request.

Returns

result: object Return type is the same as would be returned by `Job.get_result`.

Raises

AsyncTimeoutError If the job does not finish in time

AsyncProcessUnsuccessfulError If the job errored or was aborted

refresh ()

Update this object with the latest job data from the server.

wait_for_completion (*max_wait: int = 600*) → None

Waits for job to complete.

Parameters

max_wait [int, optional] How long to wait for the job to finish.

class datarobot.models.**TrainingPredictionsJob** (*data, model_id, data_subset, **kwargs*)

classmethod **get** (*project_id, job_id, model_id=None, data_subset=None*)

Fetches one training predictions job.

The resulting *TrainingPredictions* object will be annotated with *model_id* and *data_subset*.

Parameters

project_id [str] The identifier of the project in which the job resides

job_id [str] The job id

model_id [str] The identifier of the model used for computing training predictions

data_subset [dr.enums.DATA_SUBSET, optional] Data subset used for computing training predictions

Returns

job [TrainingPredictionsJob] The job

refresh ()

Update this object with the latest job data from the server.

cancel ()

Cancel this job. If this job has not finished running, it will be removed and canceled.

get_result (*params=None*)

Parameters

params [dict or None] Query parameters to be added to request to get results.

For featureEffects and featureFit, source param is required to define source,

otherwise the default is ‘training‘

Returns

result [object]

Return type depends on the job type:

- for model jobs, a Model is returned
- for predict jobs, a pandas.DataFrame (with predictions) is returned
- for featureImpact jobs, a list of dicts by default (see *with_metadata* parameter of the *FeatureImpactJob* class and its *get* () method).
- for primeRulesets jobs, a list of Rulesets
- for primeModel jobs, a PrimeModel
- for primeDownloadValidation jobs, a PrimeFile
- for predictionExplanationInitialization jobs, a PredictionExplanationsInitialization
- for predictionExplanations jobs, a PredictionExplanations

- for featureEffects, a FeatureEffects
- for featureFit, a FeatureFit

Raises

JobNotFinished If the job is not finished, the result is not available.

AsyncProcessUnsuccessfulError If the job errored or was aborted

get_result_when_complete (*max_wait=600, params=None*)

Parameters

max_wait [int, optional] How long to wait for the job to finish.

params [dict, optional] Query parameters to be added to request.

Returns

result: object Return type is the same as would be returned by *Job.get_result*.

Raises

AsyncTimeoutError If the job does not finish in time

AsyncProcessUnsuccessfulError If the job errored or was aborted

wait_for_completion (*max_wait: int = 600*) → None

Waits for job to complete.

Parameters

max_wait [int, optional] How long to wait for the job to finish.

class datarobot.models.**ShapMatrixJob** (*data: Dict[str, Any], model_id: Optional[str] = None, dataset_id: Optional[str] = None, **kwargs*)

classmethod **get** (*project_id: str, job_id: str, model_id: Optional[str] = None, dataset_id: Optional[str] = None*) → datarobot.models.shap_matrix_job.ShapMatrixJob
Fetches one SHAP matrix job.

Parameters

project_id [str] The identifier of the project in which the job resides

job_id [str] The job identifier

model_id [str] The identifier of the model used for computing prediction explanations

dataset_id [str] The identifier of the dataset against which prediction explanations should be computed

Returns

job [ShapMatrixJob] The job

Raises

AsyncFailureError Querying this resource gave a status code other than 200 or 303

refresh () → None

Update this object with the latest job data from the server.

cancel ()

Cancel this job. If this job has not finished running, it will be removed and canceled.

get_result (*params=None*)

Parameters

params [dict or None] Query parameters to be added to request to get results.

For featureEffects and featureFit, source param is required to define source, otherwise the default is ‘training’

Returns

result [object]

Return type depends on the job type:

- for model jobs, a Model is returned
- for predict jobs, a pandas.DataFrame (with predictions) is returned
- for featureImpact jobs, a list of dicts by default (see `with_metadata` parameter of the `FeatureImpactJob` class and its `get()` method).
- for primeRulesets jobs, a list of Rulesets
- for primeModel jobs, a PrimeModel
- for primeDownloadValidation jobs, a PrimeFile
- for predictionExplanationInitialization jobs, a PredictionExplanationsInitialization
- for predictionExplanations jobs, a PredictionExplanations
- for featureEffects, a FeatureEffects
- for featureFit, a FeatureFit

Raises

JobNotFinished If the job is not finished, the result is not available.

AsyncProcessUnsuccessfulError If the job errored or was aborted

get_result_when_complete (*max_wait=600, params=None*)

Parameters

max_wait [int, optional] How long to wait for the job to finish.

params [dict, optional] Query parameters to be added to request.

Returns

result: object Return type is the same as would be returned by `Job.get_result`.

Raises

AsyncTimeoutError If the job does not finish in time

AsyncProcessUnsuccessfulError If the job errored or was aborted

wait_for_completion (*max_wait: int = 600*) → None

Waits for job to complete.

Parameters

max_wait [int, optional] How long to wait for the job to finish.

class `datarobot.models.FeatureImpactJob` (*data, completed_resource_url=None, with_metadata=False*)

Custom Feature Impact job to handle different return value structures.

The original implementation had just the the data and the new one also includes some metadata.

In general, we aim to keep the number of Job classes low by just utilizing the *job_type* attribute to control any specific formatting; however in this case when we needed to support a new representation with the *_same_job_type*, customizing the behavior of *_make_result_from_location* allowed us to achieve our ends without complicating the *_make_result_from_json* method.

classmethod `get` (*project_id*, *job_id*, *with_metadata=False*)

Fetches one job.

Parameters

project_id [str] The identifier of the project in which the job resides

job_id [str] The job id

with_metadata [bool] To make this job return the metadata (i.e. the full object of the completed resource) set the *with_metadata* flag to True.

Returns

job [Job] The job

Raises

AsyncFailureError Querying this resource gave a status code other than 200 or 303

cancel ()

Cancel this job. If this job has not finished running, it will be removed and canceled.

get_result (*params=None*)

Parameters

params [dict or None] Query parameters to be added to request to get results.

For featureEffects and featureFit, source param is required to define source, otherwise the default is ‘training‘

Returns

result [object]

Return type depends on the job type:

- for model jobs, a Model is returned
- for predict jobs, a pandas.DataFrame (with predictions) is returned
- for featureImpact jobs, a list of dicts by default (see *with_metadata* parameter of the *FeatureImpactJob* class and its *get* () method).
- for primeRulesets jobs, a list of Rulesets
- for primeModel jobs, a PrimeModel
- for primeDownloadValidation jobs, a PrimeFile
- for predictionExplanationInitialization jobs, a PredictionExplanationsInitialization
- for predictionExplanations jobs, a PredictionExplanations
- for featureEffects, a FeatureEffects
- for featureFit, a FeatureFit

Raises

JobNotFinished If the job is not finished, the result is not available.

AsyncProcessUnsuccessfulError If the job errored or was aborted

get_result_when_complete (*max_wait=600, params=None*)

Parameters

max_wait [int, optional] How long to wait for the job to finish.

params [dict, optional] Query parameters to be added to request.

Returns

result: object Return type is the same as would be returned by *Job.get_result*.

Raises

AsyncTimeoutError If the job does not finish in time

AsyncProcessUnsuccessfulError If the job errored or was aborted

refresh ()

Update this object with the latest job data from the server.

wait_for_completion (*max_wait: int = 600*) → None

Waits for job to complete.

Parameters

max_wait [int, optional] How long to wait for the job to finish.

2.3.31 Lift Chart

class `datarobot.models.lift_chart.LiftChart` (*source, bins, source_model_id, target_class*)
Lift chart data for model.

Notes

`LiftChartBin` is a dict containing the following:

- `actual` (float) Sum of actual target values in bin
- `predicted` (float) Sum of predicted target values in bin
- `bin_weight` (float) The weight of the bin. For weighted projects, it is the sum of the weights of the rows in the bin. For unweighted projects, it is the number of rows in the bin.

Attributes

source [str] Lift chart data source. Can be `validation`, `crossValidation` or `holdout`.

bins [list of dict] List of dicts with schema described as `LiftChartBin` above.

source_model_id [str] ID of the model this lift chart represents; in some cases, insights from the parent of a frozen model may be used

target_class [str, optional] For multiclass lift - target class for this lift chart data.

2.3.32 Missing Values Report

class `datarobot.models.missing_report.MissingValuesReport` (*missing_values_report: List[MissingReportPerFeatureDict]*)
 Missing values report for model, contains list of reports per feature sorted by missing count in descending order.

Notes

Report per feature contains:

- `feature`: feature name.
- `type`: feature type – ‘‘Numeric’’ or ‘‘Categorical’’.
- `missing_count`: missing values count in training data.
- `missing_percentage`: missing values percentage in training data.
- `tasks`: list of information per each task, which was applied to feature.

task information contains:

- `id`: a number of task in the blueprint diagram.
- `name`: task name.
- `descriptions`: human readable aggregated information about how the task handles missing values. The following descriptions may be present: what value is imputed for missing values, whether the feature being missing is treated as a feature by the task, whether missing values are treated as infrequent values, whether infrequent values are treated as missing values, and whether missing values are ignored.

classmethod `get` (*project_id: str, model_id: str*) → `datarobot.models.missing_report.MissingValuesReport`
 Retrieve a missing report.

Parameters

project_id [str] The project’s id.

model_id [str] The model’s id.

Returns

MissingValuesReport The queried missing report.

2.3.33 Models

Model

```
class datarobot.models.Model (id=None, processes=None, featurelist_name=None, featurelist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, model_type=None, model_category=None, is_frozen=None, is_n_clusters_dynamically_determined=None, blueprint_id=None, metrics=None, project=None, monotonic_increasing_featurelist_id=None, monotonic_decreasing_featurelist_id=None, n_clusters=None, has_empty_clusters=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, model_number=None, parent_model_id=None, use_project_settings=None, supports_composable_ml=None)
```

A model trained on a project's dataset capable of making predictions

All durations are specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Attributes

id [str] the id of the model

project_id [str] the id of the project the model belongs to

processes [list of str] the processes used by the model

featurelist_name [str] the name of the featurelist used by the model

featurelist_id [str] the id of the featurelist used by the model

sample_pct [float or None] the percentage of the project dataset used in training the model. If the project uses datetime partitioning, the `sample_pct` will be None. See `training_row_count`, `training_duration`, and `training_start_date` and `training_end_date` instead.

training_row_count [int or None] the number of rows of the project dataset used in training the model. In a datetime partitioned project, if specified, defines the number of rows used to train the model and evaluate backtest scores; if unspecified, either `training_duration` or `training_start_date` and `training_end_date` was used to determine that instead.

training_duration [str or None] only present for models in datetime partitioned projects. If specified, a duration string specifying the duration spanned by the data used to train the model and evaluate backtest scores.

training_start_date [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the start date of the data used to train the model.

training_end_date [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the end date of the data used to train the model.

model_type [str] what model this is, e.g. "Nystroem Kernel SVM Regressor"

model_category [str] what kind of model this is - "prime" for DataRobot Prime models, "blend" for blender models, and "model" for other models

is_frozen [bool] whether this model is a frozen model

is_n_clusters_dynamically_determined [bool] (New in version v2.27) optional, if this model determines number of clusters dynamically

- blueprint_id** [str] the id of the blueprint used in this model
- metrics** [dict] a mapping from each metric to the model's scores for that metric
- monotonic_increasing_featurelist_id** [str] optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced.
- monotonic_decreasing_featurelist_id** [str] optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. If None, no such constraints are enforced.
- n_clusters** [int] (New in version v2.27) optional, number of data clusters discovered by model
- has_empty_clusters: bool** (New in version v2.27) optional, whether clustering models produces empty clusters.
- supports_monotonic_constraints** [bool] optional, whether this model supports enforcing monotonic constraints
- is_starred** [bool] whether this model marked as starred
- prediction_threshold** [float] for binary classification projects, the threshold used for predictions
- prediction_threshold_read_only** [bool] indicated whether modification of the prediction threshold is forbidden. Threshold modification is forbidden once a model has had a deployment created or predictions made via the dedicated prediction API.
- model_number** [integer] model number assigned to a model
- parent_model_id** [str or None] (New in version v2.20) the id of the model that tuning parameters are derived from
- use_project_settings** [bool or None] (New in version v2.20) Only present for models in datetime-partitioned projects. If True, indicates that the custom backtest partitioning settings specified by the user were used to train the model and evaluate backtest scores.
- supports_composable_ml** [bool or None] (New in version v2.26) whether this model is supported in the Composable ML.

classmethod get (*project: str, model_id: str*) → datarobot.models.model.Model
Retrieve a specific model.

Parameters

- project** [str] The project's id.
- model_id** [str] The `model_id` of the leaderboard item to retrieve.

Returns

- model** [Model] The queried instance.

Raises

- ValueError** passed `project` parameter value is of not supported type

get_features_used () → List[str]
Query the server to determine which features were used.

Note that the data returned by this method is possibly different than the names of the features in the featurelist used by this model. This method will return the raw features that must be supplied in order for predictions to be generated on a new set of data. The featurelist, in contrast, would also include the names of derived features.

Returns

features [list of str] The names of the features used in the model.

get_supported_capabilities ()

Retrieves a summary of the capabilities supported by a model.

New in version v2.14.

Returns

supportsBlending: bool whether the model supports blending

supportsMonotonicConstraints: bool whether the model supports monotonic constraints

hasWordCloud: bool whether the model has word cloud data available

eligibleForPrime: bool whether the model is eligible for Prime

hasParameters: bool whether the model has parameters that can be retrieved

supportsCodeGeneration: bool (New in version v2.18) whether the model supports code generation

supportsShap: bool

(New in version v2.18) True if the model supports Shapley package. i.e. Shapley based feature Importance

supportsEarlyStopping: bool (New in version v2.22) True if this is an early stopping tree-based model and number of trained iterations can be retrieved.

get_num_iterations_trained ()

Retrieves the number of estimators trained by early-stopping tree-based models.

– versionadded:: v2.22

Returns

projectId: str id of project containing the model

modelId: str id of the model

data: array list of *numEstimatorsItem* objects, one for each modeling stage.

numEstimatorsItem will be of the form:

stage: str indicates the modeling stage (for multi-stage models); None of single-stage models

numIterations: int the number of estimators or iterations trained by the model

delete () → None

Delete a model from the project's leaderboard.

get_uri () → str**Returns**

url [str] Permanent static hyperlink to this model at leaderboard.

get_leaderboard_ui_permalink () → str**Returns**

url [str] Permanent static hyperlink to this model at leaderboard.

open_model_browser () → None

Opens model at project leaderboard in web browser. Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

train (*sample_pct*: Optional[float] = None, *featurelist_id*: Optional[str] = None, *scoring_type*: Optional[str] = None, *training_row_count*: Optional[int] = None, *monotonic_increasing_featurelist_id*: Union[str, object, None] = <object object>, *monotonic_decreasing_featurelist_id*: Union[str, object, None] = <object object>) → str
Train the blueprint used in model on a particular featurelist or amount of data.

This method creates a new training job for worker and appends it to the end of the queue for this project. After the job has finished you can get the newly trained model by retrieving it from the project leaderboard, or by retrieving the result of the job.

Either *sample_pct* or *training_row_count* can be used to specify the amount of data to use, but not both. If neither are specified, a default of the maximum amount of data that can safely be used to train any blueprint without going into the validation data will be selected.

In smart-sampled projects, *sample_pct* and *training_row_count* are assumed to be in terms of rows of the minority class.

Note: For datetime partitioned projects, see *train_datetime* instead.

Parameters

sample_pct [float, optional] The amount of data to use for training, as a percentage of the project dataset from 0 to 100.

featurelist_id [str, optional] The identifier of the featurelist to use. If not defined, the featurelist of this model is used.

scoring_type [str, optional] Either `validation` or `crossValidation` (also `dr.SCORING_TYPE.validation` or `dr.SCORING_TYPE.cross_validation`). `validation` is available for every partitioning type, and indicates that the default model validation should be used for the project. If the project uses a form of cross-validation partitioning, `crossValidation` can also be used to indicate that all of the available training/validation combinations should be used to evaluate the model.

training_row_count [int, optional] The number of rows to use to train the requested model.

monotonic_increasing_featurelist_id [str] (new in version 2.11) optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str] (new in version 2.11) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

Returns

model_job_id [str] id of created job, can be used as parameter to `ModelJob.get` method or `wait_for_async_model_creation` function

Examples

```
project = Project.get('project-id')
model = Model.get('project-id', 'model-id')
model_job_id = model.train(training_row_count=project.max_train_rows)
```

train_datetime (*featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, training_duration: Optional[str] = None, time_window_sample_pct: Optional[int] = None, monotonic_increasing_featurelist_id: Optional[Union[str, object]] = <object object>, monotonic_decreasing_featurelist_id: Optional[Union[str, object]] = <object object>, use_project_settings: bool = False, sampling_method: Optional[str] = None, n_clusters: Optional[int] = None*) → ModelJob

Trains this model on a different featurelist or sample size.

Requires that this model is part of a datetime partitioned project; otherwise, an error will occur.

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

featurelist_id [str, optional] the featurelist to use to train the model. If not specified, the featurelist of this model is used.

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, neither `training_duration` nor `use_project_settings` may be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, neither `training_row_count` nor `use_project_settings` may be specified.

use_project_settings [bool, optional] (New in version v2.20) defaults to `False`. If `True`, indicates that the custom backtest partitioning settings specified by the user will be used to train the model and evaluate backtest scores. If specified, neither `training_row_count` nor `training_duration` may be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. duration or start and end dates). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from backtest (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

monotonic_increasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

n_clusters: int, optional (New in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that don't automatically determine the number of clusters.

Returns

job [ModelJob] the created job to build the model

retrain (*sample_pct: Optional[float] = None, featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, n_clusters: Optional[int] = None*) → ModelJob
Submit a job to the queue to train a blender model.

Parameters

sample_pct: float, optional The sample size in percents (1 to 100) to use in training. If this parameter is used then `training_row_count` should not be given.

featurelist_id [str, optional] The featurelist id

training_row_count [int, optional] The number of rows used to train the model. If this parameter is used, then `sample_pct` should not be given.

n_clusters: int, optional (new in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that do not determine the number of clusters automatically.

Returns

job [ModelJob] The created job that is retraining the model

request_predictions (*dataset_id: Optional[str] = None, dataset: Optional[Dataset] = None, dataframe: Optional[pd.DataFrame] = None, file_path: Optional[str] = None, file: Optional[IOBase] = None, include_prediction_intervals: Optional[bool] = None, prediction_intervals_size: Optional[int] = None, forecast_point: Optional[datetime] = None, predictions_start_date: Optional[datetime] = None, predictions_end_date: Optional[datetime] = None, actual_value_column: Optional[str] = None, explanation_algorithm: Optional[str] = None, max_explanations: Optional[int] = None, max_ngram_explanations: Optional[Union[int, str]] = None*) → PredictionJob

Requests predictions against a previously uploaded dataset.

Parameters

dataset_id [string, optional] The ID of the dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataset [Dataset, optional] The dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataframe [pd.DataFrame, optional] (New in v3.0) The dataframe to make predictions against

file_path [str, optional] (New in v3.0) Path to file to make predictions against

file [IOBase, optional] (New in v3.0) File to make predictions against

include_prediction_intervals [bool, optional] (New in v2.16) For *time series* projects only. Specifies whether prediction intervals should be calculated for this request. Defaults to True if *prediction_intervals_size* is specified, otherwise defaults to False.

prediction_intervals_size [int, optional] (New in v2.16) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Defaults to 80 if *include_prediction_intervals* is True. Prediction intervals size must be between 1 and 100 (inclusive).

forecast_point [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series [prediction documentation](#) for more information.

predictions_start_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_end_date*. Can't be provided with the *forecast_point* parameter.

predictions_end_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_start_date*. Can't be provided with the *forecast_point* parameter.

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the *forecast_point* parameter.

explanation_algorithm: (New in version v2.21) optional; If set to `'shap'`, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to null (no prediction explanations).

max_explanations: (New in version v2.21) int optional; specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. If null, no limit. In the case of `'shap'`: if the number of features is greater than the limit, the sum of remaining values will also be returned as *shapRemainingTotal*. Defaults to null. Cannot be set if *explanation_algorithm* is omitted.

max_ngram_explanations: optional; int or str (New in version v2.29) Specifies the maximum number of text explanation values that should be returned. If set to *all*, text explanations will be computed and all the ngram explanations will be returned. If set to a non zero positive integer value, text explanations will be computed and this amount of descendingly sorted ngram explanations will be returned. By default text explanation won't be triggered to be computed.

Returns

job [PredictJob] The job computing the predictions

get_feature_impact (*with_metadata: bool = False*)

Retrieve the computed Feature Impact results, a measure of the relevance of each feature in the model.

Feature Impact is computed for each column by creating new data with that column randomly permuted (but the others left unchanged), and seeing how the error metric score for the predictions is affected. The `impactUnnormalized` is how much worse the error metric score is when making predictions on this modified data. The `impactNormalized` is normalized so that the largest value is 1. In both cases, larger values indicate more important features.

If a feature is a redundant feature, i.e. once other features are considered it doesn't contribute much in addition, the `redundantWith` value is the name of feature that has the highest correlation with this feature. Note that redundancy detection is only available for jobs run after the addition of this feature. When retrieving data that predates this functionality, a `NoRedundancyImpactAvailable` warning will be used.

Elsewhere this technique is sometimes called `Permutation Importance`.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Parameters

with_metadata [bool] The flag indicating if the result should include the metadata as well.

Returns

list or dict The feature impact data response depends on the `with_metadata` parameter. The response is either a dict with metadata and a list with actual data or just a list with that data.

Each List item is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, `redundantWith` and `count`.

For dict response available keys are:

- **featureImpacts** - Feature Impact data as a dictionary. Each item is a dict with keys: `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.
- **shapBased** - A boolean that indicates whether Feature Impact was calculated using Shapley values.
- **ranRedundancyDetection** - A boolean that indicates whether redundant feature identification was run while calculating this Feature Impact.
- **rowCount** - An integer or None that indicates the number of rows that was used to calculate Feature Impact. For the Feature Impact calculated with the default logic, without specifying the `rowCount`, we return None here.
- `count` - An integer with the number of features under the `featureImpacts`.

Raises

ClientError (404) If the feature impacts have not been computed.

`get_multiclass_feature_impact()`

For multiclass it's possible to calculate feature impact separately for each target class. The method for calculation is exactly the same, calculated in one-vs-all style for each target class.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Returns

feature_impacts [list of dict] The feature impact data. Each item is a dict with the keys `featureImpacts` (list), `class` (str). Each item in `featureImpacts` is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.

Raises

ClientError (404) If the multiclass feature impacts have not been computed.

request_feature_impact (*row_count: Optional[int] = None, with_metadata: bool = False*)

Request feature impacts to be computed for the model.

get_feature_fit_metadata()

Retrieve Feature Fit metadata. Response contains status and available model sources.

- Feature Fit of *training* is always available (except for the old project which supports only Feature Fit for *validation*).
- When a model is trained into *validation* or *holdout* without stacked prediction (e.g. no out-of-sample prediction in *validation* or *holdout*), Feature Fit is not available for *validation* or *holdout*.
- Feature Fit for *holdout* is not available when there is no holdout configured for the project.

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

Returns

feature_effect_metadata: FeatureFitMetadata

request_feature_effect (*row_count: Optional[int] = None*)

Request feature effects to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

Returns

job [Job] A Job representing the feature effect computation. To get the completed feature effect data, use *job.get_result* or *job.get_result_when_complete*.

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

request_feature_effects_multiclass (*row_count: Optional[int] = None, top_n_features: Optional[int] = None, features=None*)

Request Feature Effects computation for the multiclass model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by feature impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

Returns

job [Job] A Job representing Feature Effect computation. To get the completed Feature Effect data, use *job.get_result* or *job.get_result_when_complete*.

get_feature_effect (*source: str*)

Retrieve Feature Effects for the model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information the available sources.

Parameters

source [string] The source Feature Effects are retrieved for.

Returns

feature_effects [FeatureEffects] The feature effects data.

Raises

ClientError (404) If the feature effects have not been computed or source is not valid value.

get_feature_effects_multiclass (*source: str = 'training', class_: Optional[str] = None*)

Retrieve Feature Effects for the multiclass model.

Feature Effects provide partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information the available sources.

Parameters

source [str] The source Feature Effects are retrieved for.

class_ [str or None] The class name Feature Effects are retrieved for.

Returns

list The list of multiclass feature effects.

Raises

ClientError (404) If Feature Effects have not been computed or source is not valid value.

get_or_request_feature_effects_multiclass (*source, top_n_features=None, features=None, row_count=None, class_=None, max_wait=600*)

Retrieve Feature Effects for the multiclass model, requesting a job if it hasn't been run previously.

Parameters

source [string] The source Feature Effects retrieve for.

class_ [str or None] The class name Feature Effects retrieve for.

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by Feature Impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

max_wait [int, optional] The maximum time to wait for a requested Feature Effects job to complete before erroring.

Returns

feature_effects [list of FeatureEffectsMulticlass] The list of multiclass feature effects data.

get_or_request_feature_effect (*source: str, max_wait: int = 600, row_count: Optional[int] = None*)

Retrieve feature effect for the model, requesting a job if it hasn't been run previously

See [get_feature_effect_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature effect job to complete before erroring

row_count [int, optional] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

source [string] The source Feature Effects are retrieved for.

Returns

feature_effects [FeatureEffects] The feature effects data.

request_feature_fit ()

Request feature fit to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

Returns

job [Job] A Job representing the feature fit computation. To get the completed feature fit data, use *job.get_result* or *job.get_result_when_complete*.

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

get_feature_fit (*source: str*)

Retrieve Feature Fit for the model.

Feature Fit provides partial dependence and predicted vs actual values for top-500 features ordered by feature importance score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Fit has already been computed with [request_feature_effect](#).

See [get_feature_fit_metadata](#) for retrieving information the available sources.

Parameters

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_fit [FeatureFit] The feature fit data.

Raises

ClientError (404) If the feature fit have not been computed or source is not valid value.

get_or_request_feature_fit (*source: str, max_wait: int = 600*)

Retrieve feature fit for the model, requesting a job if it hasn't been run previously

See [get_feature_fit_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature fit job to complete before erroring

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_effects [FeatureFit] The feature fit data.

get_prime_eligibility ()

Check if this model can be approximated with DataRobot Prime

Returns

prime_eligibility [dict] a dict indicating whether a model can be approximated with DataRobot Prime (key *can_make_prime*) and why it may be ineligible (key *message*)

request_approximation ()

Request an approximation of this model using DataRobot Prime

This will create several rulesets that could be used to approximate this model. After comparing their scores and rule counts, the code used in the approximation can be downloaded and run locally.

Returns

job [Job] the job generating the rulesets

get_rulesets () → List[datarobot.models.ruleset.RuleSet]

List the rulesets approximating this model generated by DataRobot Prime

If this model hasn't been approximated yet, will return an empty list. Note that these are rulesets approximating this model, not rulesets used to construct this model.

Returns

rulesets [list of RuleSet]

download_export (*filepath: str*) → None

Download an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

Parameters

filepath [str] The path at which to save the exported model file.

request_transferable_export (*prediction_intervals_size: Optional[int] = None*) → Job

Request generation of an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

This function does not download the exported file. Use `download_export` for that.

Parameters

prediction_intervals_size [int, optional] (New in v2.19) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Prediction intervals size must be between 1 and 100 (inclusive).

Returns

Job

Examples

```
model = datarobot.Model.get('project-id', 'model-id')
job = model.request_transferable_export()
job.wait_for_completion()
model.download_export('my_exported_model.drmodel')

# Client must be configured to use standalone prediction server for import:
datarobot.Client(token='my-token-at-standalone-server',
                 endpoint='standalone-server-url/api/v2')

imported_model = datarobot.ImportedModel.create('my_exported_model.drmodel')
```

request_frozen_model (*sample_pct*: Optional[float] = None, *training_row_count*: Optional[int] = None) → ModelJob

Train a new frozen model with parameters from this model

Note: This method only works if project the model belongs to is *not* datetime partitioned. If it is, use `request_frozen_datetime_model` instead.

Frozen models use the same tuning parameters as their parent model instead of independently optimizing them to allow efficiently retraining models on larger amounts of the training data.

Parameters

sample_pct [float] optional, the percentage of the dataset to use with the model. If not provided, will use the value from this model.

training_row_count [int] (New in version v2.9) optional, the integer number of rows of the dataset to use with the model. Only one of *sample_pct* and *training_row_count* should be specified.

Returns

model_job [ModelJob] the modeling job training a frozen model

request_frozen_datetime_model (*training_row_count*: Optional[int] = None, *training_duration*: Optional[str] = None, *training_start_date*: Optional[datetime] = None, *training_end_date*: Optional[datetime] = None, *time_window_sample_pct*: Optional[int] = None, *sampling_method*: Optional[str] = None) → ModelJob

Train a new frozen model with parameters from this model.

Requires that this model belongs to a datetime partitioned project. If it does not, an error will occur when submitting the job.

Frozen models use the same tuning parameters as their parent model instead of independently optimizing them to allow efficiently retraining models on larger amounts of the training data.

In addition of `training_row_count` and `training_duration`, frozen datetime models may be trained on an exact date range. Only one of `training_row_count`, `training_duration`, or `training_start_date` and `training_end_date` should be specified.

Models specified using `training_start_date` and `training_end_date` are the only ones that can be trained into the holdout data (once the holdout is unlocked).

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, `training_duration` may not be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, `training_row_count` may not be specified.

training_start_date [datetime.datetime, optional] the start date of the data to train to model on. Only rows occurring at or after this datetime will be used. If `training_start_date` is specified, `training_end_date` must also be specified.

training_end_date [datetime.datetime, optional] the end date of the data to train the model on. Only rows occurring strictly before this datetime will be used. If `training_end_date` is specified, `training_start_date` must also be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. duration or start and end dates). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from backtest (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

Returns

model_job [ModelJob] the modeling job training a frozen model

get_parameters ()

Retrieve model parameters.

Returns

ModelParameters Model parameters for this model.

get_lift_chart (*source*, *fallback_to_parent_insights=False*)

Retrieve the model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values. (New in version v2.23) For time series and OTV models, also accepts values `backtest_2`, `backtest_3`, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

LiftChart Model lift chart data

Raises

ClientError If the insight is not available for this model

get_all_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_multiclass_lift_chart (*source, fallback_to_parent_insights=False*)

Retrieve model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_all_multiclass_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_multilabel_lift_charts (*source, fallback_to_parent_insights=False*)

Retrieve model Lift charts for the specified source.

New in version v2.24.

Parameters

source [str] Lift chart data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_residuals_chart (*source, fallback_to_parent_insights=False*)

Retrieve model residuals chart for the specified source.

Parameters

source [str] Residuals chart data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent if the residuals chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return residuals data from this model's parent.

Returns

ResidualsChart Model residuals chart data

Raises

ClientError If the insight is not available for this model

get_all_residuals_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ResidualsChart Data for all available model residuals charts.

get_pareto_front ()

Retrieve the Pareto Front for a Eureka model.

This method is only supported for Eureka models.

Returns**ParetoFront** Model ParetoFront data

get_confusion_chart (*source, fallback_to_parent_insights=False*)
 Retrieve them model's confusion matrix for the specified source.

Parameters

source [str] Confusion chart source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent if the confusion chart is not available for this model and the defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns**ConfusionChart** Model ConfusionChart data**Raises****ClientError** If the insight is not available for this model

get_all_confusion_charts (*fallback_to_parent_insights=False*)
 Retrieve a list of all confusion matrices available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent for any source that is not available for this model and if this has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns**list of ConfusionChart** Data for all available confusion charts for model.

get_roc_curve (*source, fallback_to_parent_insights=False*)
 Retrieve the ROC curve for a binary model for the specified source.

Parameters

source [str] ROC curve data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values. (New in version v2.23) For time series and OTV models, also accepts values *backtest_2*, *backtest_3*, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns**RocCurve** Model ROC curve data**Raises****ClientError** If the insight is not available for this model**(New in version v3.0) TypeError** If the underlying project type is multilabel

get_all_roc_curves (*fallback_to_parent_insights=False*)
 Retrieve a list of all ROC curves available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of RocCurve Data for all available model ROC curves.

get_labelwise_roc_curves (*source*, *fallback_to_parent_insights=False*)

Retrieve a list of LabelwiseRocCurve instances for a multilabel model the given source and all labels.

New in version v2.24.

Parameters

source [str] ROC curve data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

list of [class:LabelwiseRocCurve <datarobot.models.roc_curve.LabelwiseRocCurve>] Labelwise ROC Curve instances for *source* and all labels

Raises

ClientError If the insight is not available for this model

(New in version v3.0) **TypeError** If the underlying project type is binary

get_word_cloud (*exclude_stop_words=False*)

Retrieve word cloud data for the model.

Parameters

exclude_stop_words [bool, optional] Set to True if you want stopwords filtered out of response.

Returns

WordCloud Word cloud data for the model.

download_scoring_code (*file_name*, *source_code=False*)

Download the Scoring Code JAR.

Parameters

file_name [str] File path where scoring code will be saved.

source_code [bool, optional] Set to True to download source code archive. It will not be executable.

get_model_blueprint_documents ()

Get documentation for tasks used in this model.

Returns

list of BlueprintTaskDocument All documents available for the model.

`get_model_blueprint_chart ()`

Retrieve a diagram that can be used to understand data flow in the blueprint.

Returns

ModelBlueprintChart The queried model blueprint chart.

`get_missing_report_info ()`

Retrieve a report on missing training data that can be used to understand missing values treatment in the model. The report consists of missing values resolutions for features numeric or categorical features that were part of building the model.

Returns

An iterable of MissingReportPerFeature The queried model missing report, sorted by missing count (DESCENDING order).

`get_frozen_child_models ()`

Retrieve the IDs for all models that are frozen from this model.

Returns

A list of Models

`request_training_predictions (data_subset, explanation_algorithm=None, max_explanations=None)`

Start a job to build training predictions

Parameters

data_subset [str] data set definition to build predictions on. Choices are:

- *dr.enums.DATA_SUBSET.ALL* or string *all for all data available*. Not valid for models in datetime partitioned projects
- *dr.enums.DATA_SUBSET.VALIDATION_AND_HOLDOUT* or string *validationAndHoldout for all data except training set*. Not valid for models in datetime partitioned projects
- *dr.enums.DATA_SUBSET.HOLDOUT* or string *holdout* for holdout data set only
- *dr.enums.DATA_SUBSET.ALL_BACKTESTS* or string *allBacktests for downloading the predictions for all backtest validation folds*. Requires the model to have successfully scored all backtests. Datetime partitioned projects only.

explanation_algorithm [dr.enums.EXPLANATIONS_ALGORITHM] (New in v2.21) Optional. If set to *dr.enums.EXPLANATIONS_ALGORITHM.SHAP*, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to *None* (no prediction explanations).

max_explanations [int] (New in v2.21) Optional. Specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. In the case of *dr.enums.EXPLANATIONS_ALGORITHM.SHAP*: If not set, explanations are returned for all features. If the number of features is greater than the `max_explanations`, the sum of remaining values will also be returned as `shap_remaining_total`. Max 100. Defaults to null for datasets narrower than 100 columns, defaults to 100 for datasets wider than 100 columns. Is ignored if `explanation_algorithm` is not set.

Returns

Job an instance of created async job

`cross_validate ()`

Run cross validation on the model.

Note: To perform Cross Validation on a new model with new parameters, use `train` instead.

Returns

ModelJob The created job to build the model

get_cross_validation_scores (*partition=None, metric=None*)

Return a dictionary, keyed by metric, showing cross validation scores per partition.

Cross Validation should already have been performed using `cross_validate` or `train`.

Note: Models that computed cross validation before this feature was added will need to be deleted and retrained before this method can be used.

Parameters

partition [float] optional, the id of the partition (1,2,3.0,4.0,etc) to filter results by can be a whole number positive integer or float value. 0 corresponds to the validation partition.

metric: unicode optional name of the metric to filter to resulting cross validation scores by

Returns

cross_validation_scores: dict A dictionary keyed by metric showing cross validation scores per partition.

advanced_tune (*params, description: Optional[str] = None*) → ModelJob

Generate a new model with the specified advanced-tuning parameters

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Parameters

params [dict] Mapping of parameter ID to parameter value. The list of valid parameter IDs for a model can be found by calling `get_advanced_tuning_parameters()`. This endpoint does not need to include values for all parameters. If a parameter is omitted, its `current_value` will be used.

description [str] Human-readable string describing the newly advanced-tuned model

Returns

ModelJob The created job to build the model

get_advanced_tuning_parameters () → AdvancedTuningParamsType

Get the advanced-tuning parameters available for this model.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

dict A dictionary describing the advanced-tuning parameters for the current model. There are two top-level keys, `tuning_description` and `tuning_parameters`.

`tuning_description` an optional value. If not `None`, then it indicates the user-specified description of this set of tuning parameter.

tuning_parameters is a list of a dicts, each has the following keys

- `parameter_name` : (**str**) name of the parameter (unique per task, see below)
- `parameter_id` : (**str**) opaque ID string uniquely identifying parameter
- `default_value` : (*) the actual value used to train the model; either the single value of the parameter specified before training, or the best value from the list of grid-searched values (based on *current_value*)
- `current_value` : (*) the single value or list of values of the parameter that were grid searched. Depending on the grid search specification, could be a single fixed value (no grid search), a list of discrete values, or a range.
- `task_name` : (**str**) name of the task that this parameter belongs to
- `constraints`: (**dict**) see the notes below
- `vertex_id`: (**str**) ID of vertex that this parameter belongs to

Notes

The type of *default_value* and *current_value* is defined by the *constraints* structure. It will be a string or numeric Python type.

constraints is a dict with *at least one*, possibly more, of the following keys. The presence of a key indicates that the parameter may take on the specified type. (If a key is absent, this means that the parameter may not take on the specified type.) If a key on *constraints* is present, its value will be a dict containing all of the fields described below for that key.

```
"constraints": {
  "select": {
    "values": [<list (basestring or number) : possible values>]
  },
  "ascii": {},
  "unicode": {},
  "int": {
    "min": <int : minimum valid value>,
    "max": <int : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  },
  "float": {
    "min": <float : minimum valid value>,
    "max": <float : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  },
  "intList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <int : minimum valid value>,
    "max_val": <int : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  },
  "floatList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
  }
}
```

(continues on next page)

(continued from previous page)

```

    "min_val": <float : minimum valid value>,
    "max_val": <float : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                               requested for this param>
  }
}

```

The keys have meaning as follows:

- *select*: Rather than specifying a specific data type, if present, it indicates that the parameter is permitted to take on any of the specified values. Listed values may be of any string or real (non-complex) numeric type.
- *ascii*: The parameter may be a *unicode* object that encodes simple ASCII characters. (A-Z, a-z, 0-9, whitespace, and certain common symbols.) In addition to listed constraints, ASCII keys currently may not contain either newlines or semicolons.
- *unicode*: The parameter may be any Python *unicode* object.
- *int*: The value may be an object of type *int* within the specified range (inclusive). Please note that the value will be passed around using the JSON format, and some JSON parsers have undefined behavior with integers outside of the range $[-(2^{53})+1, (2^{53})-1]$.
- *float*: The value may be an object of type *float* within the specified range (inclusive).
- *intList*, *floatList*: The value may be a list of *int* or *float* objects, respectively, following constraints as specified respectively by the *int* and *float* types (above).

Many parameters only specify one key under *constraints*. If a parameter specifies multiple keys, the parameter may take on any value permitted by any key.

start_advanced_tuning_session()

Start an Advanced Tuning session. Returns an object that helps set up arguments for an Advanced Tuning model execution.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

AdvancedTuningSession Session for setting up and running Advanced Tuning on a model

star_model() → None

Mark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

unstar_model() → None

Unmark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

set_prediction_threshold(threshold)

Set a custom prediction threshold for the model.

May not be used once `prediction_threshold_read_only` is True for this model.

Parameters

threshold [float] only used for binary classification projects. The threshold to when deciding between the positive and negative classes when making predictions. Should be between 0.0 and 1.0 (inclusive).

download_training_artifact (*file_name*)

Retrieve trained artifact(s) from a model containing one or more custom tasks.

Artifact(s) will be downloaded to the specified local filepath.

Parameters

file_name [str] File path where trained model artifact(s) will be saved.

request_fairness_insights (*fairness_metrics_set=None*)

Request fairness insights to be computed for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>. The fairness metric used to calculate the fairness scores.

Returns

status_id [str] A statusId of computation request.

get_fairness_insights (*fairness_metrics_set=None, offset=0, limit=100*)

Retrieve a list of Per Class Bias insights for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>. The fairness metric used to calculate the fairness scores.

offset [int, optional] Number of items to skip.

limit [int, optional] Number of items to return.

Returns

json

request_data_disparity_insights (*feature, compared_class_names*)

Request data disparity insights to be computed for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

compared_class_names [list(str)] List of two classes to compare

Returns

status_id [str] A statusId of computation request.

get_data_disparity_insights (*feature, class_name1, class_name2*)

Retrieve a list of Cross Class Data Disparity insights for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

class_name1 [str] One of the compared classes

class_name2 [str] Another compared class

Returns

json

request_cross_class_accuracy_scores ()

Request data disparity insights to be computed for the model.

Returns

status_id [str] A statusId of computation request.

get_cross_class_accuracy_scores ()

Retrieves a list of Cross Class Accuracy scores for the model.

Returns

json

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

PrimeModel

```
class datarobot.models.PrimeModel (id=None, processes=None, featurelist_name=None, featurelist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, model_type=None, model_category=None, is_frozen=None, blueprint_id=None, metrics=None, parent_model_id=None, ruleset_id=None, rule_count=None, score=None, monotonic_increasing_featurelist_id=None, monotonic_decreasing_featurelist_id=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, model_number=None, supports_composable_ml=None)
```

Represents a DataRobot Prime model approximating a parent model with downloadable code.

All durations are specified with a duration string such as those returned by the [partitioning_methods.construct_duration_string](#) helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Attributes

id [str] the id of the model

project_id [str] the id of the project the model belongs to

processes [list of str] the processes used by the model

featurelist_name [str] the name of the featurelist used by the model

featurelist_id [str] the id of the featurelist used by the model

sample_pct [float] the percentage of the project dataset used in training the model

training_row_count [int or None] the number of rows of the project dataset used in training the model. In a datetime partitioned project, if specified, defines the number of rows used to train the model and evaluate backtest scores; if unspecified, either *training_duration* or *training_start_date* and *training_end_date* was used to determine that instead.

training_duration [str or None] only present for models in datetime partitioned projects. If specified, a duration string specifying the duration spanned by the data used to train the model and evaluate backtest scores.

training_start_date [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the start date of the data used to train the model.

training_end_date [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the end date of the data used to train the model.

model_type [str] what model this is, e.g. `“DataRobot Prime”`

model_category [str] what kind of model this is - always `“prime”` for DataRobot Prime models

is_frozen [bool] whether this model is a frozen model

blueprint_id [str] the id of the blueprint used in this model

metrics [dict] a mapping from each metric to the model’s scores for that metric

ruleset [Ruleset] the ruleset used in the Prime model

parent_model_id [str] the id of the model that this Prime model approximates

monotonic_increasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced.

monotonic_decreasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. If None, no such constraints are enforced.

supports_monotonic_constraints [bool] optional, whether this model supports enforcing monotonic constraints

is_starred [bool] whether this model is marked as starred

prediction_threshold [float] for binary classification projects, the threshold used for predictions

prediction_threshold_read_only [bool] indicated whether modification of the prediction threshold is forbidden. Threshold modification is forbidden once a model has had a deployment created or predictions made via the dedicated prediction API.

supports_composable_ml [bool or None] (New in version v2.26) whether this model is supported in the Composable ML.

classmethod `get` (*project_id*, *model_id*)

Retrieve a specific prime model.

Parameters

project_id [str] The id of the project the prime model belongs to

model_id [str] The `model_id` of the prime model to retrieve.

Returns

model [PrimeModel] The queried instance.

request_download_validation (*language*)

Prep and validate the downloadable code for the ruleset associated with this model.

Parameters

language [str] the language the code should be downloaded in - see `datarobot.enums.PRIME_LANGUAGE` for available languages

Returns

job [Job] A job tracking the code preparation and validation

advanced_tune (*params*, *description: Optional[str] = None*) → ModelJob

Generate a new model with the specified advanced-tuning parameters

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Parameters

params [dict] Mapping of parameter ID to parameter value. The list of valid parameter IDs for a model can be found by calling `get_advanced_tuning_parameters()`. This endpoint does not need to include values for all parameters. If a parameter is omitted, its `current_value` will be used.

description [str] Human-readable string describing the newly advanced-tuned model

Returns

ModelJob The created job to build the model

cross_validate ()

Run cross validation on the model.

Note: To perform Cross Validation on a new model with new parameters, use `train` instead.

Returns

ModelJob The created job to build the model

delete () → None

Delete a model from the project's leaderboard.

download_export (*filepath: str*) → None

Download an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

Parameters

filepath [str] The path at which to save the exported model file.

download_scoring_code (*file_name*, *source_code=False*)

Download the Scoring Code JAR.

Parameters

file_name [str] File path where scoring code will be saved.

source_code [bool, optional] Set to True to download source code archive. It will not be executable.

download_training_artifact (*file_name*)

Retrieve trained artifact(s) from a model containing one or more custom tasks.

Artifact(s) will be downloaded to the specified local filepath.

Parameters

file_name [str] File path where trained model artifact(s) will be saved.

classmethod from_data (*data*: Union[Dict[str, Any], List[Dict[str, Any]]]) → T
Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

get_advanced_tuning_parameters () → AdvancedTuningParamsType
Get the advanced-tuning parameters available for this model.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

dict A dictionary describing the advanced-tuning parameters for the current model. There are two top-level keys, *tuning_description* and *tuning_parameters*.

tuning_description an optional value. If not *None*, then it indicates the user-specified description of this set of tuning parameter.

tuning_parameters is a list of a dicts, each has the following keys

- **parameter_name** : (**str**) name of the parameter (unique per task, see below)
- **parameter_id** : (**str**) opaque ID string uniquely identifying parameter
- **default_value** : (*) the actual value used to train the model; either the single value of the parameter specified before training, or the best value from the list of grid-searched values (based on *current_value*)
- **current_value** : (*) the single value or list of values of the parameter that were grid searched. Depending on the grid search specification, could be a single fixed value (no grid search), a list of discrete values, or a range.
- **task_name** : (**str**) name of the task that this parameter belongs to
- **constraints**: (**dict**) see the notes below
- **vertex_id**: (**str**) ID of vertex that this parameter belongs to

Notes

The type of *default_value* and *current_value* is defined by the *constraints* structure. It will be a string or numeric Python type.

constraints is a dict with *at least one*, possibly more, of the following keys. The presence of a key indicates that the parameter may take on the specified type. (If a key is absent, this means that the parameter may not take on the specified type.) If a key on *constraints* is present, its value will be a dict containing all of the fields described below for that key.

```

"constraints": {
  "select": {
    "values": [<list (basestring or number) : possible values>]
  },
  "ascii": {},
  "unicode": {},
  "int": {

```

(continues on next page)

(continued from previous page)

```

    "min": <int : minimum valid value>,
    "max": <int : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  },
  "float": {
    "min": <float : minimum valid value>,
    "max": <float : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  },
  "intList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <int : minimum valid value>,
    "max_val": <int : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  },
  "floatList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <float : minimum valid value>,
    "max_val": <float : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  }
}

```

The keys have meaning as follows:

- *select*: Rather than specifying a specific data type, if present, it indicates that the parameter is permitted to take on any of the specified values. Listed values may be of any string or real (non-complex) numeric type.
- *ascii*: The parameter may be a *unicode* object that encodes simple ASCII characters. (A-Z, a-z, 0-9, whitespace, and certain common symbols.) In addition to listed constraints, ASCII keys currently may not contain either newlines or semicolons.
- *unicode*: The parameter may be any Python *unicode* object.
- *int*: The value may be an object of type *int* within the specified range (inclusive). Please note that the value will be passed around using the JSON format, and some JSON parsers have undefined behavior with integers outside of the range $[-(2^{53})+1, (2^{53})-1]$.
- *float*: The value may be an object of type *float* within the specified range (inclusive).
- *intList*, *floatList*: The value may be a list of *int* or *float* objects, respectively, following constraints as specified respectively by the *int* and *float* types (above).

Many parameters only specify one key under *constraints*. If a parameter specifies multiple keys, the parameter may take on any value permitted by any key.

get_all_confusion_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all confusion matrices available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent for any source that is not available for

this model and if this has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ConfusionChart Data for all available confusion charts for model.

get_all_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_multiclass_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_residuals_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ResidualsChart Data for all available model residuals charts.

get_all_roc_curves (*fallback_to_parent_insights=False*)

Retrieve a list of all ROC curves available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of RocCurve Data for all available model ROC curves.

get_confusion_chart (*source, fallback_to_parent_insights=False*)
Retrieve them model's confusion matrix for the specified source.

Parameters

source [str] Confusion chart source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent if the confusion chart is not available for this model and the defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

ConfusionChart Model ConfusionChart data

Raises

ClientError If the insight is not available for this model

get_cross_class_accuracy_scores ()
Retrieves a list of Cross Class Accuracy scores for the model.

Returns

json

get_cross_validation_scores (*partition=None, metric=None*)
Return a dictionary, keyed by metric, showing cross validation scores per partition.

Cross Validation should already have been performed using *cross_validate* or *train*.

Note: Models that computed cross validation before this feature was added will need to be deleted and retrained before this method can be used.

Parameters

partition [float] optional, the id of the partition (1,2,3.0,4.0,etc) to filter results by can be a whole number positive integer or float value. 0 corresponds to the validation partition.

metric: unicode optional name of the metric to filter to resulting cross validation scores by

Returns

cross_validation_scores: dict A dictionary keyed by metric showing cross validation scores per partition.

get_data_disparity_insights (*feature, class_name1, class_name2*)
Retrieve a list of Cross Class Data Disparity insights for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

class_name1 [str] One of the compared classes

class_name2 [str] Another compared class

Returns

json**get_fairness_insights** (*fairness_metrics_set=None, offset=0, limit=100*)

Retrieve a list of Per Class Bias insights for the model.

Parameters**fairness_metrics_set** [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>.

The fairness metric used to calculate the fairness scores.

offset [int, optional] Number of items to skip.**limit** [int, optional] Number of items to return.**Returns****json****get_feature_effect** (*source: str*)

Retrieve Feature Effects for the model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with *request_feature_effect*.See *get_feature_effect_metadata* for retrieving information the available sources.**Parameters****source** [string] The source Feature Effects are retrieved for.**Returns****feature_effects** [FeatureEffects] The feature effects data.**Raises****ClientError (404)** If the feature effects have not been computed or source is not valid value.**get_feature_effect_metadata** ()

Retrieve Feature Effects metadata. Response contains status and available model sources.

- Feature Fit for the *training* partition is always available, with the exception of older projects that only supported Feature Fit for *validation*.
- When a model is trained into *validation* or *holdout* without stacked predictions (i.e., no out-of-sample predictions in those partitions), Feature Effects is not available for *validation* or *holdout*.
- Feature Effects for *holdout* is not available when holdout was not unlocked for the project.

Use *source* to retrieve Feature Effects, selecting one of the provided sources.**Returns****feature_effect_metadata: FeatureEffectMetadata****get_feature_effects_multiclass** (*source: str = 'training', class_: Optional[str] = None*)

Retrieve Feature Effects for the multiclass model.

Feature Effects provide partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information the available sources.

Parameters

source [str] The source Feature Effects are retrieved for.

class_ [str or None] The class name Feature Effects are retrieved for.

Returns

list The list of multiclass feature effects.

Raises

ClientError (404) If Feature Effects have not been computed or source is not valid value.

`get_feature_fit (source: str)`

Retrieve Feature Fit for the model.

Feature Fit provides partial dependence and predicted vs actual values for top-500 features ordered by feature importance score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Fit has already been computed with `request_feature_effect`.

See `get_feature_fit_metadata` for retrieving information the available sources.

Parameters

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_fit [FeatureFit] The feature fit data.

Raises

ClientError (404) If the feature fit have not been computed or source is not valid value.

`get_feature_fit_metadata ()`

Retrieve Feature Fit metadata. Response contains status and available model sources.

- Feature Fit of *training* is always available (except for the old project which supports only Feature Fit for *validation*).
- When a model is trained into *validation* or *holdout* without stacked prediction (e.g. no out-of-sample prediction in *validation* or *holdout*), Feature Fit is not available for *validation* or *holdout*.
- Feature Fit for *holdout* is not available when there is no holdout configured for the project.

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

Returns

feature_effect_metadata: FeatureFitMetadata

get_feature_impact (*with_metadata: bool = False*)

Retrieve the computed Feature Impact results, a measure of the relevance of each feature in the model.

Feature Impact is computed for each column by creating new data with that column randomly permuted (but the others left unchanged), and seeing how the error metric score for the predictions is affected. The `impactUnnormalized` is how much worse the error metric score is when making predictions on this modified data. The `impactNormalized` is normalized so that the largest value is 1. In both cases, larger values indicate more important features.

If a feature is a redundant feature, i.e. once other features are considered it doesn't contribute much in addition, the `redundantWith` value is the name of feature that has the highest correlation with this feature. Note that redundancy detection is only available for jobs run after the addition of this feature. When retrieving data that predates this functionality, a `NoRedundancyImpactAvailable` warning will be used.

Elsewhere this technique is sometimes called `Permutation Importance`.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Parameters

with_metadata [bool] The flag indicating if the result should include the metadata as well.

Returns

list or dict The feature impact data response depends on the `with_metadata` parameter. The response is either a dict with metadata and a list with actual data or just a list with that data.

Each List item is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, `redundantWith` and `count`.

For dict response available keys are:

- **featureImpacts** - Feature Impact data as a dictionary. Each item is a dict with keys: `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.
- **shapBased** - A boolean that indicates whether Feature Impact was calculated using Shapley values.
- **ranRedundancyDetection** - A boolean that indicates whether redundant feature identification was run while calculating this Feature Impact.
- **rowCount** - An integer or None that indicates the number of rows that was used to calculate Feature Impact. For the Feature Impact calculated with the default logic, without specifying the `rowCount`, we return None here.
- `count` - An integer with the number of features under the `featureImpacts`.

Raises

ClientError (404) If the feature impacts have not been computed.

get_features_used () → List[str]

Query the server to determine which features were used.

Note that the data returned by this method is possibly different than the names of the features in the `featurelist` used by this model. This method will return the raw features that must be supplied in order for predictions to be generated on a new set of data. The `featurelist`, in contrast, would also include the names of derived features.

Returns

features [list of str] The names of the features used in the model.

get_frozen_child_models ()

Retrieve the IDs for all models that are frozen from this model.

Returns

A list of Models

get_labelwise_roc_curves (*source*, *fallback_to_parent_insights=False*)

Retrieve a list of LabelwiseRocCurve instances for a multilabel model the given source and all labels.

New in version v2.24.

Parameters

source [str] ROC curve data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

list of [class:LabelwiseRocCurve <datarobot.models.roc_curve.LabelwiseRocCurve>] Labelwise ROC Curve instances for *source* and all labels

Raises

ClientError If the insight is not available for this model

(New in version v3.0) TypeError If the underlying project type is binary

get_leaderboard_ui_permalink () → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

get_lift_chart (*source*, *fallback_to_parent_insights=False*)

Retrieve the model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values. (New in version v2.23) For time series and OTV models, also accepts values *backtest_2*, *backtest_3*, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

LiftChart Model lift chart data

Raises

ClientError If the insight is not available for this model

get_missing_report_info ()

Retrieve a report on missing training data that can be used to understand missing values treatment in the

model. The report consists of missing values resolutions for features numeric or categorical features that were part of building the model.

Returns

An iterable of MissingReportPerFeature The queried model missing report, sorted by missing count (DESCENDING order).

get_model_blueprint_chart ()

Retrieve a diagram that can be used to understand data flow in the blueprint.

Returns

ModelBlueprintChart The queried model blueprint chart.

get_model_blueprint_documents ()

Get documentation for tasks used in this model.

Returns

list of BlueprintTaskDocument All documents available for the model.

get_multiclass_feature_impact ()

For multiclass it's possible to calculate feature impact separately for each target class. The method for calculation is exactly the same, calculated in one-vs-all style for each target class.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Returns

feature_impacts [list of dict] The feature impact data. Each item is a dict with the keys `featureImpacts` (list), `class` (str). Each item in `featureImpacts` is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.

Raises

ClientError (404) If the multiclass feature impacts have not been computed.

get_multiclass_lift_chart (*source, fallback_to_parent_insights=False*)

Retrieve model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_multilabel_lift_charts (*source, fallback_to_parent_insights=False*)

Retrieve model Lift charts for the specified source.

New in version v2.24.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

`get_num_iterations_trained()`

Retrieves the number of estimators trained by early-stopping tree-based models.

– versionadded:: v2.22

Returns

projectId: str id of project containing the model

modelId: str id of the model

data: array list of *numEstimatorsItem* objects, one for each modeling stage.

numEstimatorsItem will be of the form:

stage: str indicates the modeling stage (for multi-stage models); None of single-stage models

numIterations: int the number of estimators or iterations trained by the model

`get_or_request_feature_effect(source: str, max_wait: int = 600, row_count: Optional[int] = None)`

Retrieve feature effect for the model, requesting a job if it hasn't been run previously

See [get_feature_effect_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature effect job to complete before erroring

row_count [int, optional] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

source [string] The source Feature Effects are retrieved for.

Returns

feature_effects [FeatureEffects] The feature effects data.

`get_or_request_feature_effects_multiclass(source, top_n_features=None, features=None, row_count=None, class_=None, max_wait=600)`

Retrieve Feature Effects for the multiclass model, requesting a job if it hasn't been run previously.

Parameters

source [string] The source Feature Effects retrieve for.

class_ [str or None] The class name Feature Effects retrieve for.

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by Feature Impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

max_wait [int, optional] The maximum time to wait for a requested Feature Effects job to complete before erroring.

Returns

feature_effects [list of FeatureEffectsMulticlass] The list of multiclass feature effects data.

get_or_request_feature_fit (*source: str, max_wait: int = 600*)

Retrieve feature fit for the model, requesting a job if it hasn't been run previously

See [get_feature_fit_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature fit job to complete before erroring

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_effects [FeatureFit] The feature fit data.

get_or_request_feature_impact (*max_wait: int = 600, **kwargs*)

Retrieve feature impact for the model, requesting a job if it hasn't been run previously

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature impact job to complete before erroring

****kwargs** Arbitrary keyword arguments passed to [request_feature_impact](#).

Returns

feature_impacts [list or dict] The feature impact data. See [get_feature_impact](#) for the exact schema.

get_parameters ()

Retrieve model parameters.

Returns

ModelParameters Model parameters for this model.

get_pareto_front ()

Retrieve the Pareto Front for a Eureka model.

This method is only supported for Eureka models.

Returns

ParetoFront Model ParetoFront data

get_prime_eligibility ()

Check if this model can be approximated with DataRobot Prime

Returns

prime_eligibility [dict] a dict indicating whether a model can be approximated with DataRobot Prime (key *can_make_prime*) and why it may be ineligible (key *message*)

get_residuals_chart (*source, fallback_to_parent_insights=False*)

Retrieve model residuals chart for the specified source.

Parameters

source [str] Residuals chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent if the residuals chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return residuals data from this model's parent.

Returns

ResidualsChart Model residuals chart data

Raises

ClientError If the insight is not available for this model

get_roc_curve (*source, fallback_to_parent_insights=False*)

Retrieve the ROC curve for a binary model for the specified source.

Parameters

source [str] ROC curve data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values. (New in version v2.23) For time series and OTV models, also accepts values *backtest_2*, *backtest_3*, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

RocCurve Model ROC curve data

Raises

ClientError If the insight is not available for this model

(New in version v3.0) TypeError If the underlying project type is multilabel

get_rulesets () → List[datarobot.models.ruleset.RuleSet]

List the rulesets approximating this model generated by DataRobot Prime

If this model hasn't been approximated yet, will return an empty list. Note that these are rulesets approximating this model, not rulesets used to construct this model.

Returns

rulesets [list of RuleSet]

get_supported_capabilities ()

Retrieves a summary of the capabilities supported by a model.

New in version v2.14.

Returns

supportsBlending: bool whether the model supports blending

supportsMonotonicConstraints: bool whether the model supports monotonic constraints

hasWordCloud: bool whether the model has word cloud data available

eligibleForPrime: bool whether the model is eligible for Prime

hasParameters: bool whether the model has parameters that can be retrieved

supportsCodeGeneration: bool (New in version v2.18) whether the model supports code generation

supportsShap: bool

(New in version v2.18) True if the model supports Shapley package. i.e. Shapley based feature Importance

supportsEarlyStopping: bool (New in version v2.22) True if this is an early stopping tree-based model and number of trained iterations can be retrieved.

get_uri () → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

get_word_cloud (exclude_stop_words=False)

Retrieve word cloud data for the model.

Parameters

exclude_stop_words [bool, optional] Set to True if you want stopwords filtered out of response.

Returns

WordCloud Word cloud data for the model.

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

open_model_browser () → None

Opens model at project leaderboard in web browser. Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

request_cross_class_accuracy_scores ()

Request data disparity insights to be computed for the model.

Returns

status_id [str] A statusId of computation request.

request_data_disparity_insights (feature, compared_class_names)

Request data disparity insights to be computed for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

compared_class_names [list(str)] List of two classes to compare

Returns

status_id [str] A statusId of computation request.

request_external_test (dataset_id: str, actual_value_column: Optional[str] = None)

Request external test to compute scores and insights on an external test dataset

Parameters

dataset_id [string] The dataset to make predictions against (as uploaded from `Project.upload_dataset`)

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the `forecast_point` parameter.

Returns

•

job [Job] a Job representing external dataset insights computation

request_fairness_insights (*fairness_metrics_set=None*)

Request fairness insights to be computed for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of `<datarobot.enums.FairnessMetricsSet>`. The fairness metric used to calculate the fairness scores.

Returns

status_id [str] A statusId of computation request.

request_feature_effect (*row_count: Optional[int] = None*)

Request feature effects to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

Returns

job [Job] A Job representing the feature effect computation. To get the completed feature effect data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

request_feature_effects_multiclass (*row_count: Optional[int] = None, top_n_features: Optional[int] = None, features=None*)

Request Feature Effects computation for the multiclass model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by feature impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

Returns

job [Job] A Job representing Feature Effect computation. To get the completed Feature Effect data, use `job.get_result` or `job.get_result_when_complete`.

request_feature_fit()

Request feature fit to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

Returns

job [Job] A Job representing the feature fit computation. To get the completed feature fit data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

request_feature_impact (*row_count: Optional[int] = None, with_metadata: bool = False*)

Request feature impacts to be computed for the model.

See [get_feature_impact](#) for more information on the result of the job.

Parameters

row_count [int] The sample size (specified in rows) to use for Feature Impact computation. This is not supported for unsupervised, multi-class (that has a separate method) and time series projects.

Returns

job [Job] A Job representing the feature impact computation. To get the completed feature impact data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature impacts have already been requested.

request_predictions (*dataset_id: Optional[str] = None, dataset: Optional[Dataset] = None, dataframe: Optional[pd.DataFrame] = None, file_path: Optional[str] = None, file: Optional[IOBase] = None, include_prediction_intervals: Optional[bool] = None, prediction_intervals_size: Optional[int] = None, forecast_point: Optional[datetime] = None, predictions_start_date: Optional[datetime] = None, predictions_end_date: Optional[datetime] = None, actual_value_column: Optional[str] = None, explanation_algorithm: Optional[str] = None, max_explanations: Optional[int] = None, max_ngram_explanations: Optional[Union[int, str]] = None*) → PredictionJob

Requests predictions against a previously uploaded dataset.

Parameters

dataset_id [string, optional] The ID of the dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataset [`Dataset`, optional] The dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataframe [`pd.DataFrame`, optional] (New in v3.0) The dataframe to make predictions against

file_path [str, optional] (New in v3.0) Path to file to make predictions against

file [`IOBase`, optional] (New in v3.0) File to make predictions against

include_prediction_intervals [bool, optional] (New in v2.16) For *time series* projects only. Specifies whether prediction intervals should be calculated for this request. Defaults to True if `prediction_intervals_size` is specified, otherwise defaults to False.

prediction_intervals_size [int, optional] (New in v2.16) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Defaults to 80 if *include_prediction_intervals* is True. Prediction intervals size must be between 1 and 100 (inclusive).

forecast_point [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series [prediction documentation](#) for more information.

predictions_start_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_end_date*. Can't be provided with the *forecast_point* parameter.

predictions_end_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_start_date*. Can't be provided with the *forecast_point* parameter.

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the *forecast_point* parameter.

explanation_algorithm: (New in version v2.21) optional; If set to `shap`, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to null (no prediction explanations).

max_explanations: (New in version v2.21) int optional; specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. If null, no limit. In the case of `shap`: if the number of features is greater than the limit, the sum of remaining values will also be returned as *shapRemainingTotal*. Defaults to null. Cannot be set if *explanation_algorithm* is omitted.

max_ngram_explanations: optional; int or str (New in version v2.29) Specifies the maximum number of text explanation values that should be returned. If set to *all*, text explanations will be computed and all the ngram explanations will be returned. If set to a non zero positive integer value, text explanations will be computed and this amount of descendingly sorted ngram explanations will be returned. By default text explanation won't be triggered to be computed.

Returns

job [PredictJob] The job computing the predictions

request_training_predictions (*data_subset*, *explanation_algorithm=None*,
max_explanations=None)

Start a job to build training predictions

Parameters

data_subset [str] data set definition to build predictions on. Choices are:

- *dr.enums.DATA_SUBSET.ALL* or string *all* for all data available. Not valid for models in datetime partitioned projects
- *dr.enums.DATA_SUBSET.VALIDATION_AND_HOLDOUT* or string *validationAndHoldout* for all data except training set. Not valid for models in datetime partitioned projects

- `dr.enums.DATA_SUBSET.HOLDOUT` or string `holdout` for holdout data set only
- `dr.enums.DATA_SUBSET.ALL_BACKTESTS` or string `allBacktests` for downloading the predictions for all backtest validation folds. Requires the model to have successfully scored all backtests. Datetime partitioned projects only.

explanation_algorithm [`dr.enums.EXPLANATIONS_ALGORITHM`] (New in v2.21) Optional. If set to `dr.enums.EXPLANATIONS_ALGORITHM.SHAP`, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to `None` (no prediction explanations).

max_explanations [`int`] (New in v2.21) Optional. Specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. In the case of `dr.enums.EXPLANATIONS_ALGORITHM.SHAP`: If not set, explanations are returned for all features. If the number of features is greater than the `max_explanations`, the sum of remaining values will also be returned as `shap_remaining_total`. Max 100. Defaults to null for datasets narrower than 100 columns, defaults to 100 for datasets wider than 100 columns. Is ignored if `explanation_algorithm` is not set.

Returns

Job an instance of created async job

request_transferable_export (*prediction_intervals_size: Optional[int] = None*) → Job

Request generation of an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

This function does not download the exported file. Use `download_export` for that.

Parameters

prediction_intervals_size [`int`, optional] (New in v2.19) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Prediction intervals size must be between 1 and 100 (inclusive).

Returns

Job

Examples

```
model = datarobot.Model.get('project-id', 'model-id')
job = model.request_transferable_export()
job.wait_for_completion()
model.download_export('my_exported_model.drmodel')

# Client must be configured to use standalone prediction server for import:
datarobot.Client(token='my-token-at-standalone-server',
                 endpoint='standalone-server-url/api/v2')

imported_model = datarobot.ImportedModel.create('my_exported_model.drmodel')
```

retrain (*sample_pct: Optional[float] = None, featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, n_clusters: Optional[int] = None*) → ModelJob
Submit a job to the queue to train a blender model.

Parameters

sample_pct: float, optional The sample size in percents (1 to 100) to use in training. If this parameter is used then `training_row_count` should not be given.

featurelist_id [str, optional] The featurelist id

training_row_count [int, optional] The number of rows used to train the model. If this parameter is used, then `sample_pct` should not be given.

n_clusters: int, optional (new in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that do not determine the number of clusters automatically.

Returns

job [ModelJob] The created job that is retraining the model

set_prediction_threshold (*threshold*)

Set a custom prediction threshold for the model.

May not be used once `prediction_threshold_read_only` is True for this model.

Parameters

threshold [float] only used for binary classification projects. The threshold to when deciding between the positive and negative classes when making predictions. Should be between 0.0 and 1.0 (inclusive).

star_model () → None

Mark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

start_advanced_tuning_session ()

Start an Advanced Tuning session. Returns an object that helps set up arguments for an Advanced Tuning model execution.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

AdvancedTuningSession Session for setting up and running Advanced Tuning on a model

unstar_model () → None

Unmark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

BlenderModel

```
class datarobot.models.BlenderModel (id=None, processes=None, featurelist_name=None, featurelist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, model_type=None, model_category=None, is_frozen=None, blueprint_id=None, metrics=None, model_ids=None, blender_method=None, monotonic_increasing_featurelist_id=None, monotonic_decreasing_featurelist_id=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, model_number=None, parent_model_id=None, supports_composable_ml=None)
```

Represents blender model that combines prediction results from other models.

All durations are specified with a duration string such as those returned by the [partitioning_methods.construct_duration_string](#) helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Attributes

- id** [str] the id of the model
- project_id** [str] the id of the project the model belongs to
- processes** [list of str] the processes used by the model
- featurelist_name** [str] the name of the featurelist used by the model
- featurelist_id** [str] the id of the featurelist used by the model
- sample_pct** [float] the percentage of the project dataset used in training the model
- training_row_count** [int or None] the number of rows of the project dataset used in training the model. In a datetime partitioned project, if specified, defines the number of rows used to train the model and evaluate backtest scores; if unspecified, either *training_duration* or *training_start_date* and *training_end_date* was used to determine that instead.
- training_duration** [str or None] only present for models in datetime partitioned projects. If specified, a duration string specifying the duration spanned by the data used to train the model and evaluate backtest scores.
- training_start_date** [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the start date of the data used to train the model.
- training_end_date** [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the end date of the data used to train the model.
- model_type** [str] what model this is, e.g. "DataRobot Prime"
- model_category** [str] what kind of model this is - always "prime" for DataRobot Prime models
- is_frozen** [bool] whether this model is a frozen model
- blueprint_id** [str] the id of the blueprint used in this model
- metrics** [dict] a mapping from each metric to the model's scores for that metric
- model_ids** [list of str] List of model ids used in blender

blender_method [str] Method used to blend results from underlying models

monotonic_increasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced.

monotonic_decreasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. If None, no such constraints are enforced.

supports_monotonic_constraints [bool] optional, whether this model supports enforcing monotonic constraints

is_starred [bool] whether this model marked as starred

prediction_threshold [float] for binary classification projects, the threshold used for predictions

prediction_threshold_read_only [bool] indicated whether modification of the prediction threshold is forbidden. Threshold modification is forbidden once a model has had a deployment created or predictions made via the dedicated prediction API.

model_number [integer] model number assigned to a model

parent_model_id [str or None] (New in version v2.20) the id of the model that tuning parameters are derived from

supports_composable_ml [bool or None] (New in version v2.26) whether this model is supported in the Composable ML.

classmethod **get** (*project_id, model_id*)

Retrieve a specific blender.

Parameters

project_id [str] The project's id.

model_id [str] The `model_id` of the leaderboard item to retrieve.

Returns

model [BlenderModel] The queried instance.

advanced_tune (*params, description: Optional[str] = None*) → ModelJob

Generate a new model with the specified advanced-tuning parameters

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Parameters

params [dict] Mapping of parameter ID to parameter value. The list of valid parameter IDs for a model can be found by calling `get_advanced_tuning_parameters()`. This endpoint does not need to include values for all parameters. If a parameter is omitted, its *current_value* will be used.

description [str] Human-readable string describing the newly advanced-tuned model

Returns

ModelJob The created job to build the model

cross_validate ()

Run cross validation on the model.

Note: To perform Cross Validation on a new model with new parameters, use `train` instead.

Returns

ModelJob The created job to build the model

delete () → None

Delete a model from the project's leaderboard.

download_export (*filepath: str*) → None

Download an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

Parameters

filepath [str] The path at which to save the exported model file.

download_scoring_code (*file_name, source_code=False*)

Download the Scoring Code JAR.

Parameters

file_name [str] File path where scoring code will be saved.

source_code [bool, optional] Set to True to download source code archive. It will not be executable.

download_training_artifact (*file_name*)

Retrieve trained artifact(s) from a model containing one or more custom tasks.

Artifact(s) will be downloaded to the specified local filepath.

Parameters

file_name [str] File path where trained model artifact(s) will be saved.

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

get_advanced_tuning_parameters () → AdvancedTuningParamsType

Get the advanced-tuning parameters available for this model.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

dict A dictionary describing the advanced-tuning parameters for the current model. There are two top-level keys, *tuning_description* and *tuning_parameters*.

tuning_description an optional value. If not *None*, then it indicates the user-specified description of this set of tuning parameter.

tuning_parameters is a list of a dicts, each has the following keys

- **parameter_name** : (**str**) name of the parameter (unique per task, see below)
- **parameter_id** : (**str**) opaque ID string uniquely identifying parameter

- `default_value` : (*) the actual value used to train the model; either the single value of the parameter specified before training, or the best value from the list of grid-searched values (based on `current_value`)
- `current_value` : (*) the single value or list of values of the parameter that were grid searched. Depending on the grid search specification, could be a single fixed value (no grid search), a list of discrete values, or a range.
- `task_name` : (**str**) name of the task that this parameter belongs to
- `constraints`: (**dict**) see the notes below
- `vertex_id`: (**str**) ID of vertex that this parameter belongs to

Notes

The type of `default_value` and `current_value` is defined by the `constraints` structure. It will be a string or numeric Python type.

`constraints` is a dict with *at least one*, possibly more, of the following keys. The presence of a key indicates that the parameter may take on the specified type. (If a key is absent, this means that the parameter may not take on the specified type.) If a key on `constraints` is present, its value will be a dict containing all of the fields described below for that key.

```
"constraints": {
  "select": {
    "values": [<list (basestring or number) : possible values>]
  },
  "ascii": {},
  "unicode": {},
  "int": {
    "min": <int : minimum valid value>,
    "max": <int : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  },
  "float": {
    "min": <float : minimum valid value>,
    "max": <float : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  },
  "intList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <int : minimum valid value>,
    "max_val": <int : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  },
  "floatList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <float : minimum valid value>,
    "max_val": <float : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  }
}
```

(continues on next page)

(continued from previous page)

```
}
}
```

The keys have meaning as follows:

- *select*: Rather than specifying a specific data type, if present, it indicates that the parameter is permitted to take on any of the specified values. Listed values may be of any string or real (non-complex) numeric type.
- *ascii*: The parameter may be a *unicode* object that encodes simple ASCII characters. (A-Z, a-z, 0-9, whitespace, and certain common symbols.) In addition to listed constraints, ASCII keys currently may not contain either newlines or semicolons.
- *unicode*: The parameter may be any Python *unicode* object.
- *int*: The value may be an object of type *int* within the specified range (inclusive). Please note that the value will be passed around using the JSON format, and some JSON parsers have undefined behavior with integers outside of the range $[-(2^{*}53)+1, (2^{*}53)-1]$.
- *float*: The value may be an object of type *float* within the specified range (inclusive).
- *intList*, *floatList*: The value may be a list of *int* or *float* objects, respectively, following constraints as specified respectively by the *int* and *float* types (above).

Many parameters only specify one key under *constraints*. If a parameter specifies multiple keys, the parameter may take on any value permitted by any key.

get_all_confusion_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all confusion matrices available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent for any source that is not available for this model and if this has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ConfusionChart Data for all available confusion charts for model.

get_all_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_multiclass_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_residuals_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ResidualsChart Data for all available model residuals charts.

get_all_roc_curves (*fallback_to_parent_insights=False*)

Retrieve a list of all ROC curves available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of RocCurve Data for all available model ROC curves.

get_confusion_chart (*source, fallback_to_parent_insights=False*)

Retrieve them model's confusion matrix for the specified source.

Parameters

source [str] Confusion chart source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent if the confusion chart is not available for this model and the defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

ConfusionChart Model ConfusionChart data

Raises

ClientError If the insight is not available for this model

get_cross_class_accuracy_scores ()

Retrieves a list of Cross Class Accuracy scores for the model.

Returns

json

get_cross_validation_scores (*partition=None, metric=None*)

Return a dictionary, keyed by metric, showing cross validation scores per partition.

Cross Validation should already have been performed using `cross_validate` or `train`.

Note: Models that computed cross validation before this feature was added will need to be deleted and retrained before this method can be used.

Parameters

partition [float] optional, the id of the partition (1,2,3,0,4,0,etc) to filter results by can be a whole number positive integer or float value. 0 corresponds to the validation partition.

metric: unicode optional name of the metric to filter to resulting cross validation scores by

Returns

cross_validation_scores: dict A dictionary keyed by metric showing cross validation scores per partition.

get_data_disparity_insights (*feature, class_name1, class_name2*)

Retrieve a list of Cross Class Data Disparity insights for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

class_name1 [str] One of the compared classes

class_name2 [str] Another compared class

Returns

json

get_fairness_insights (*fairness_metrics_set=None, offset=0, limit=100*)

Retrieve a list of Per Class Bias insights for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>. The fairness metric used to calculate the fairness scores.

offset [int, optional] Number of items to skip.

limit [int, optional] Number of items to return.

Returns

json

get_feature_effect (*source: str*)

Retrieve Feature Effects for the model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information the available sources.

Parameters

source [string] The source Feature Effects are retrieved for.

Returns

feature_effects [FeatureEffects] The feature effects data.

Raises

ClientError (404) If the feature effects have not been computed or source is not valid value.

get_feature_effect_metadata ()

Retrieve Feature Effects metadata. Response contains status and available model sources.

- Feature Fit for the *training* partition is always available, with the exception of older projects that only supported Feature Fit for *validation*.
- When a model is trained into *validation* or *holdout* without stacked predictions (i.e., no out-of-sample predictions in those partitions), Feature Effects is not available for *validation* or *holdout*.
- Feature Effects for *holdout* is not available when holdout was not unlocked for the project.

Use *source* to retrieve Feature Effects, selecting one of the provided sources.

Returns

feature_effect_metadata: FeatureEffectMetadata

get_feature_effects_multiclass (source: str = 'training', class_: Optional[str] = None)

Retrieve Feature Effects for the multiclass model.

Feature Effects provide partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information the available sources.

Parameters

source [str] The source Feature Effects are retrieved for.

class_ [str or None] The class name Feature Effects are retrieved for.

Returns

list The list of multiclass feature effects.

Raises

ClientError (404) If Feature Effects have not been computed or source is not valid value.

get_feature_fit (source: str)

Retrieve Feature Fit for the model.

Feature Fit provides partial dependence and predicted vs actual values for top-500 features ordered by feature importance score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Fit has already been computed with `request_feature_effect`.

See `get_feature_fit_metadata` for retrieving information the available sources.

Parameters

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_fit [FeatureFit] The feature fit data.

Raises

ClientError (404) If the feature fit have not been computed or source is not valid value.

`get_feature_fit_metadata()`

Retrieve Feature Fit metadata. Response contains status and available model sources.

- Feature Fit of *training* is always available (except for the old project which supports only Feature Fit for *validation*).
- When a model is trained into *validation* or *holdout* without stacked prediction (e.g. no out-of-sample prediction in *validation* or *holdout*), Feature Fit is not available for *validation* or *holdout*.
- Feature Fit for *holdout* is not available when there is no holdout configured for the project.

`source` is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

Returns

feature_effect_metadata: FeatureFitMetadata

`get_feature_impact(with_metadata: bool = False)`

Retrieve the computed Feature Impact results, a measure of the relevance of each feature in the model.

Feature Impact is computed for each column by creating new data with that column randomly permuted (but the others left unchanged), and seeing how the error metric score for the predictions is affected. The `impactUnnormalized` is how much worse the error metric score is when making predictions on this modified data. The `impactNormalized` is normalized so that the largest value is 1. In both cases, larger values indicate more important features.

If a feature is a redundant feature, i.e. once other features are considered it doesn't contribute much in addition, the `redundantWith` value is the name of feature that has the highest correlation with this feature. Note that redundancy detection is only available for jobs run after the addition of this feature. When retrieving data that predates this functionality, a `NoRedundancyImpactAvailable` warning will be used.

Elsewhere this technique is sometimes called `Permutation Importance`.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Parameters

with_metadata [bool] The flag indicating if the result should include the metadata as well.

Returns

list or dict The feature impact data response depends on the `with_metadata` parameter. The response is either a dict with metadata and a list with actual data or just a list with that data.

Each List item is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, `redundantWith` and `count`.

For dict response available keys are:

- **featureImpacts** - Feature Impact data as a dictionary. Each item is a dict with keys: `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.
- **shapBased** - A boolean that indicates whether Feature Impact was calculated using Shapley values.
- **ranRedundancyDetection** - A boolean that indicates whether redundant feature identification was run while calculating this Feature Impact.
- **rowCount** - An integer or None that indicates the number of rows that was used to calculate Feature Impact. For the Feature Impact calculated with the default logic, without specifying the `rowCount`, we return None here.
- `count` - An integer with the number of features under the `featureImpacts`.

Raises

ClientError (404) If the feature impacts have not been computed.

get_features_used() → List[str]

Query the server to determine which features were used.

Note that the data returned by this method is possibly different than the names of the features in the `featurelist` used by this model. This method will return the raw features that must be supplied in order for predictions to be generated on a new set of data. The `featurelist`, in contrast, would also include the names of derived features.

Returns

features [list of str] The names of the features used in the model.

get_frozen_child_models()

Retrieve the IDs for all models that are frozen from this model.

Returns

A list of Models

get_labelwise_roc_curves (*source*, *fallback_to_parent_insights=False*)

Retrieve a list of `LabelwiseRocCurve` instances for a multilabel model the given source and all labels.

New in version v2.24.

Parameters

source [str] ROC curve data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

list of [class:`LabelwiseRocCurve` <`datarobot.models.roc_curve.LabelwiseRocCurve`>] Labelwise ROC Curve instances for `source` and all labels

Raises

ClientError If the insight is not available for this model

(New in version v3.0) **TypeError** If the underlying project type is binary

`get_leaderboard_ui_permalink ()` → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

`get_lift_chart (source, fallback_to_parent_insights=False)`

Retrieve the model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values. (New in version v2.23) For time series and OTV models, also accepts values `backtest_2`, `backtest_3`, etc., up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

LiftChart Model lift chart data

Raises

ClientError If the insight is not available for this model

`get_missing_report_info ()`

Retrieve a report on missing training data that can be used to understand missing values treatment in the model. The report consists of missing values resolutions for features numeric or categorical features that were part of building the model.

Returns

An iterable of MissingReportPerFeature The queried model missing report, sorted by missing count (DESCENDING order).

`get_model_blueprint_chart ()`

Retrieve a diagram that can be used to understand data flow in the blueprint.

Returns

ModelBlueprintChart The queried model blueprint chart.

`get_model_blueprint_documents ()`

Get documentation for tasks used in this model.

Returns

list of BlueprintTaskDocument All documents available for the model.

`get_multiclass_feature_impact ()`

For multiclass it's possible to calculate feature impact separately for each target class. The method for calculation is exactly the same, calculated in one-vs-all style for each target class.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Returns

feature_impacts [list of dict] The feature impact data. Each item is a dict with the keys `featureImpacts` (list), `class` (str). Each item in `featureImpacts`

is a dict with the keys `featureName`, `impactNormalized`, `impactUnnormalized`, and `redundantWith`.

Raises

ClientError (404) If the multiclass feature impacts have not been computed.

get_multiclass_lift_chart (*source*, *fallback_to_parent_insights=False*)

Retrieve model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_multilabel_lift_charts (*source*, *fallback_to_parent_insights=False*)

Retrieve model Lift charts for the specified source.

New in version v2.24.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_num_iterations_trained ()

Retrieves the number of estimators trained by early-stopping tree-based models.

– versionadded:: v2.22

Returns

projectId: str id of project containing the model

modelId: str id of the model

data: array list of `numEstimatorsItem` objects, one for each modeling stage.

numEstimatorsItem will be of the form:

stage: str indicates the modeling stage (for multi-stage models); None of single-stage models

numIterations: int the number of estimators or iterations trained by the model

get_or_request_feature_effect (*source: str, max_wait: int = 600, row_count: Optional[int] = None*)

Retrieve feature effect for the model, requesting a job if it hasn't been run previously

See [get_feature_effect_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature effect job to complete before erroring

row_count [int, optional] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

source [string] The source Feature Effects are retrieved for.

Returns

feature_effects [FeatureEffects] The feature effects data.

get_or_request_feature_effects_multiclass (*source, top_n_features=None, features=None, row_count=None, class_=None, max_wait=600*)

Retrieve Feature Effects for the multiclass model, requesting a job if it hasn't been run previously.

Parameters

source [string] The source Feature Effects retrieve for.

class_ [str or None] The class name Feature Effects retrieve for.

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by Feature Impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

max_wait [int, optional] The maximum time to wait for a requested Feature Effects job to complete before erroring.

Returns

feature_effects [list of FeatureEffectsMulticlass] The list of multiclass feature effects data.

get_or_request_feature_fit (*source: str, max_wait: int = 600*)

Retrieve feature fit for the model, requesting a job if it hasn't been run previously

See [get_feature_fit_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature fit job to complete before erroring

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_effects [FeatureFit] The feature fit data.

get_or_request_feature_impact (*max_wait: int = 600, **kwargs*)

Retrieve feature impact for the model, requesting a job if it hasn't been run previously

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature impact job to complete before erroring

****kwargs** Arbitrary keyword arguments passed to `request_feature_impact`.

Returns

feature_impacts [list or dict] The feature impact data. See `get_feature_impact` for the exact schema.

get_parameters ()

Retrieve model parameters.

Returns

ModelParameters Model parameters for this model.

get_pareto_front ()

Retrieve the Pareto Front for a Eureqa model.

This method is only supported for Eureqa models.

Returns

ParetoFront Model ParetoFront data

get_prime_eligibility ()

Check if this model can be approximated with DataRobot Prime

Returns

prime_eligibility [dict] a dict indicating whether a model can be approximated with DataRobot Prime (key `can_make_prime`) and why it may be ineligible (key `message`)

get_residuals_chart (*source, fallback_to_parent_insights=False*)

Retrieve model residuals chart for the specified source.

Parameters

source [str] Residuals chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent if the residuals chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return residuals data from this model's parent.

Returns

ResidualsChart Model residuals chart data

Raises

ClientError If the insight is not available for this model

get_roc_curve (*source, fallback_to_parent_insights=False*)

Retrieve the ROC curve for a binary model for the specified source.

Parameters

source [str] ROC curve data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values. (New in version v2.23) For time series and OTV models, also accepts values `backtest_2`, `backtest_3`, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

RocCurve Model ROC curve data

Raises

ClientError If the insight is not available for this model

(New in version v3.0) **TypeError** If the underlying project type is multilabel

get_rulesets () → List[datarobot.models.ruleset.RuleSet]

List the rulesets approximating this model generated by DataRobot Prime

If this model hasn't been approximated yet, will return an empty list. Note that these are rulesets approximating this model, not rulesets used to construct this model.

Returns

rulesets [list of RuleSet]

get_supported_capabilities ()

Retrieves a summary of the capabilities supported by a model.

New in version v2.14.

Returns

supportsBlending: bool whether the model supports blending

supportsMonotonicConstraints: bool whether the model supports monotonic constraints

hasWordCloud: bool whether the model has word cloud data available

eligibleForPrime: bool whether the model is eligible for Prime

hasParameters: bool whether the model has parameters that can be retrieved

supportsCodeGeneration: bool (New in version v2.18) whether the model supports code generation

supportsShap: bool

(New in version v2.18) **True if the model supports Shapley package. i.e. Shapley based feature Importance**

supportsEarlyStopping: bool (New in version v2.22) *True* if this is an early stopping tree-based model and number of trained iterations can be retrieved.

get_uri () → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

get_word_cloud (*exclude_stop_words=False*)

Retrieve word cloud data for the model.

Parameters

exclude_stop_words [bool, optional] Set to True if you want stopwords filtered out of response.

Returns

WordCloud Word cloud data for the model.

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

open_model_browser () → None

Opens model at project leaderboard in web browser. Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

request_approximation ()

Request an approximation of this model using DataRobot Prime

This will create several rulesets that could be used to approximate this model. After comparing their scores and rule counts, the code used in the approximation can be downloaded and run locally.

Returns

job [Job] the job generating the rulesets

request_cross_class_accuracy_scores ()

Request data disparity insights to be computed for the model.

Returns

status_id [str] A statusId of computation request.

request_data_disparity_insights (*feature, compared_class_names*)

Request data disparity insights to be computed for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

compared_class_names [list(str)] List of two classes to compare

Returns

status_id [str] A statusId of computation request.

request_external_test (*dataset_id: str, actual_value_column: Optional[str] = None*)

Request external test to compute scores and insights on an external test dataset

Parameters

dataset_id [string] The dataset to make predictions against (as uploaded from Project.upload_dataset)

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the `forecast_point` parameter.

Returns

•••••

job [Job] a Job representing external dataset insights computation

request_fairness_insights (*fairness_metrics_set=None*)

Request fairness insights to be computed for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>. The fairness metric used to calculate the fairness scores.

Returns

status_id [str] A statusId of computation request.

request_feature_effect (*row_count: Optional[int] = None*)

Request feature effects to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

Returns

job [Job] A Job representing the feature effect computation. To get the completed feature effect data, use [job.get_result](#) or [job.get_result_when_complete](#).

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

request_feature_effects_multiclass (*row_count: Optional[int] = None, top_n_features: Optional[int] = None, features=None*)

Request Feature Effects computation for the multiclass model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by feature impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

Returns

job [Job] A Job representing Feature Effect computation. To get the completed Feature Effect data, use [job.get_result](#) or [job.get_result_when_complete](#).

request_feature_fit ()

Request feature fit to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

Returns

job [Job] A Job representing the feature fit computation. To get the completed feature fit data, use [job.get_result](#) or [job.get_result_when_complete](#).

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

request_feature_impact (*row_count: Optional[int] = None, with_metadata: bool = False*)

Request feature impacts to be computed for the model.

See [get_feature_impact](#) for more information on the result of the job.

Parameters

row_count [int] The sample size (specified in rows) to use for Feature Impact computation. This is not supported for unsupervised, multi-class (that has a separate method) and time series projects.

Returns

job [Job] A Job representing the feature impact computation. To get the completed feature impact data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature impacts have already been requested.

request_frozen_datetime_model (*training_row_count: Optional[int] = None, training_duration: Optional[str] = None, training_start_date: Optional[datetime] = None, training_end_date: Optional[datetime] = None, time_window_sample_pct: Optional[int] = None, sampling_method: Optional[str] = None*) → ModelJob

Train a new frozen model with parameters from this model.

Requires that this model belongs to a datetime partitioned project. If it does not, an error will occur when submitting the job.

Frozen models use the same tuning parameters as their parent model instead of independently optimizing them to allow efficiently retraining models on larger amounts of the training data.

In addition of `training_row_count` and `training_duration`, frozen datetime models may be trained on an exact date range. Only one of `training_row_count`, `training_duration`, or `training_start_date` and `training_end_date` should be specified.

Models specified using `training_start_date` and `training_end_date` are the only ones that can be trained into the holdout data (once the holdout is unlocked).

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, `training_duration` may not be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, `training_row_count` may not be specified.

training_start_date [datetime.datetime, optional] the start date of the data to train to model on. Only rows occurring at or after this datetime will be used. If `training_start_date` is specified, `training_end_date` must also be specified.

training_end_date [datetime.datetime, optional] the end date of the data to train the model on. Only rows occurring strictly before this datetime will be used. If `training_end_date` is specified, `training_start_date` must also be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. duration or start and end dates). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from back-test (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

Returns

model_job [ModelJob] the modeling job training a frozen model

request_frozen_model (*sample_pct: Optional[float] = None, training_row_count: Optional[int] = None*) → ModelJob

Train a new frozen model with parameters from this model

Note: This method only works if project the model belongs to is *not* datetime partitioned. If it is, use `request_frozen_datetime_model` instead.

Frozen models use the same tuning parameters as their parent model instead of independently optimizing them to allow efficiently retraining models on larger amounts of the training data.

Parameters

sample_pct [float] optional, the percentage of the dataset to use with the model. If not provided, will use the value from this model.

training_row_count [int] (New in version v2.9) optional, the integer number of rows of the dataset to use with the model. Only one of `sample_pct` and `training_row_count` should be specified.

Returns

model_job [ModelJob] the modeling job training a frozen model

request_predictions (*dataset_id: Optional[str] = None, dataset: Optional[Dataset] = None, dataframe: Optional[pd.DataFrame] = None, file_path: Optional[str] = None, file: Optional[IOBase] = None, include_prediction_intervals: Optional[bool] = None, prediction_intervals_size: Optional[int] = None, forecast_point: Optional[datetime] = None, predictions_start_date: Optional[datetime] = None, predictions_end_date: Optional[datetime] = None, actual_value_column: Optional[str] = None, explanation_algorithm: Optional[str] = None, max_explanations: Optional[int] = None, max_ngram_explanations: Optional[Union[int, str]] = None*) → PredictionJob

Requests predictions against a previously uploaded dataset.

Parameters

dataset_id [string, optional] The ID of the dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataset [`Dataset`, optional] The dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataframe [`pd.DataFrame`, optional] (New in v3.0) The dataframe to make predictions against

file_path [str, optional] (New in v3.0) Path to file to make predictions against

file [`IOBase`, optional] (New in v3.0) File to make predictions against

include_prediction_intervals [bool, optional] (New in v2.16) For *time series* projects only. Specifies whether prediction intervals should be calculated for this request. Defaults to True if *prediction_intervals_size* is specified, otherwise defaults to False.

prediction_intervals_size [int, optional] (New in v2.16) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Defaults to 80 if *include_prediction_intervals* is True. Prediction intervals size must be between 1 and 100 (inclusive).

forecast_point [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series *prediction documentation* for more information.

predictions_start_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_end_date*. Can't be provided with the *forecast_point* parameter.

predictions_end_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_start_date*. Can't be provided with the *forecast_point* parameter.

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the *forecast_point* parameter.

explanation_algorithm: (New in version v2.21) optional; If set to `'shap'`, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to null (no prediction explanations).

max_explanations: (New in version v2.21) int optional; specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. If null, no limit. In the case of `'shap'`: if the number of features is greater than the limit, the sum of remaining values will also be returned as *shapRemainingTotal*. Defaults to null. Cannot be set if *explanation_algorithm* is omitted.

max_ngram_explanations: optional; int or str (New in version v2.29) Specifies the maximum number of text explanation values that should be returned. If set to *all*, text explanations will be computed and all the ngram explanations will be returned. If set to a non zero positive integer value, text explanations will be computed and this amount of descendingly sorted ngram explanations will be returned. By default text explanation won't be triggered to be computed.

Returns

job [PredictJob] The job computing the predictions

request_training_predictions (*data_subset*, *explanation_algorithm=None*,
max_explanations=None)

Start a job to build training predictions

Parameters

data_subset [str] data set definition to build predictions on. Choices are:

- *dr.enums.DATA_SUBSET.ALL* or string *all* for all data available. Not valid for models in datetime partitioned projects
- *dr.enums.DATA_SUBSET.VALIDATION_AND_HOLDOUT* or string *validationAndHoldout* for all data except training set. Not valid for models in datetime partitioned projects
- *dr.enums.DATA_SUBSET.HOLDOUT* or string *holdout* for holdout data set only
- *dr.enums.DATA_SUBSET.ALL_BACKTESTS* or string *allBacktests* for downloading the predictions for all backtest validation folds. Requires the model to have successfully scored all backtests. Datetime partitioned projects only.

explanation_algorithm [*dr.enums.EXPLANATIONS_ALGORITHM*] (New in v2.21) Optional. If set to *dr.enums.EXPLANATIONS_ALGORITHM.SHAP*, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to *None* (no prediction explanations).

max_explanations [int] (New in v2.21) Optional. Specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. In the case of *dr.enums.EXPLANATIONS_ALGORITHM.SHAP*: If not set, explanations are returned for all features. If the number of features is greater than the *max_explanations*, the sum of remaining values will also be returned as *shap_remaining_total*. Max 100. Defaults to null for datasets narrower than 100 columns, defaults to 100 for datasets wider than 100 columns. Is ignored if *explanation_algorithm* is not set.

Returns

Job an instance of created async job

request_transferable_export (*prediction_intervals_size: Optional[int] = None*) → Job

Request generation of an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

This function does not download the exported file. Use *download_export* for that.

Parameters

prediction_intervals_size [int, optional] (New in v2.19) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Prediction intervals size must be between 1 and 100 (inclusive).

Returns

Job

Examples

```
model = datarobot.Model.get('project-id', 'model-id')
job = model.request_transferable_export()
job.wait_for_completion()
model.download_export('my_exported_model.drmodel')

# Client must be configured to use standalone prediction server for import:
datarobot.Client(token='my-token-at-standalone-server',
                 endpoint='standalone-server-url/api/v2')
```

(continues on next page)

(continued from previous page)

```
imported_model = datarobot.ImportedModel.create('my_exported_model.drmodel')
```

retrain (*sample_pct: Optional[float] = None, featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, n_clusters: Optional[int] = None*) → ModelJob
Submit a job to the queue to train a blender model.

Parameters

sample_pct: float, optional The sample size in percents (1 to 100) to use in training. If this parameter is used then `training_row_count` should not be given.

featurelist_id [str, optional] The featurelist id

training_row_count [int, optional] The number of rows used to train the model. If this parameter is used, then `sample_pct` should not be given.

n_clusters: int, optional (new in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that do not determine the number of clusters automatically.

Returns

job [ModelJob] The created job that is retraining the model

set_prediction_threshold (*threshold*)
Set a custom prediction threshold for the model.

May not be used once `prediction_threshold_read_only` is True for this model.

Parameters

threshold [float] only used for binary classification projects. The threshold to when deciding between the positive and negative classes when making predictions. Should be between 0.0 and 1.0 (inclusive).

star_model () → None
Mark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

start_advanced_tuning_session ()
Start an Advanced Tuning session. Returns an object that helps set up arguments for an Advanced Tuning model execution.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

AdvancedTuningSession Session for setting up and running Advanced Tuning on a model

train (*sample_pct: Optional[float] = None, featurelist_id: Optional[str] = None, scoring_type: Optional[str] = None, training_row_count: Optional[int] = None, monotonic_increasing_featurelist_id: Union[str, object, None] = <object object>, monotonic_decreasing_featurelist_id: Union[str, object, None] = <object object>*) → str
Train the blueprint used in model on a particular featurelist or amount of data.

This method creates a new training job for worker and appends it to the end of the queue for this project. After the job has finished you can get the newly trained model by retrieving it from the project leaderboard, or by retrieving the result of the job.

Either `sample_pct` or `training_row_count` can be used to specify the amount of data to use, but not both. If neither are specified, a default of the maximum amount of data that can safely be used to train any blueprint without going into the validation data will be selected.

In smart-sampled projects, `sample_pct` and `training_row_count` are assumed to be in terms of rows of the minority class.

Note: For datetime partitioned projects, see `train_datetime` instead.

Parameters

sample_pct [float, optional] The amount of data to use for training, as a percentage of the project dataset from 0 to 100.

featurelist_id [str, optional] The identifier of the featurelist to use. If not defined, the featurelist of this model is used.

scoring_type [str, optional] Either `validation` or `crossValidation` (also `dr.SCORING_TYPE.validation` or `dr.SCORING_TYPE.cross_validation`). `validation` is available for every partitioning type, and indicates that the default model validation should be used for the project. If the project uses a form of cross-validation partitioning, `crossValidation` can also be used to indicate that all of the available training/validation combinations should be used to evaluate the model.

training_row_count [int, optional] The number of rows to use to train the requested model.

monotonic_increasing_featurelist_id [str] (new in version 2.11) optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str] (new in version 2.11) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

Returns

model_job_id [str] id of created job, can be used as parameter to `ModelJob.get` method or `wait_for_async_model_creation` function

Examples

```
project = Project.get('project-id')
model = Model.get('project-id', 'model-id')
model_job_id = model.train(training_row_count=project.max_train_rows)
```

train_datetime (*featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, training_duration: Optional[str] = None, time_window_sample_pct: Optional[int] = None, monotonic_increasing_featurelist_id: Optional[Union[str, object]] = <object object>, monotonic_decreasing_featurelist_id: Optional[Union[str, object]] = <object object>, use_project_settings: bool = False, sampling_method: Optional[str] = None, n_clusters: Optional[int] = None*) → `ModelJob`

Trains this model on a different featurelist or sample size.

Requires that this model is part of a datetime partitioned project; otherwise, an error will occur.

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

featurelist_id [str, optional] the featurelist to use to train the model. If not specified, the featurelist of this model is used.

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, neither `training_duration` nor `use_project_settings` may be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, neither `training_row_count` nor `use_project_settings` may be specified.

use_project_settings [bool, optional] (New in version v2.20) defaults to `False`. If `True`, indicates that the custom backtest partitioning settings specified by the user will be used to train the model and evaluate backtest scores. If specified, neither `training_row_count` nor `training_duration` may be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. duration or start and end dates). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from backtest (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

monotonic_increasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

n_clusters: int, optional (New in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that don't automatically determine the number of clusters.

Returns

job [ModelJob] the created job to build the model

unstar_model () → None
Unmark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

DatetimeModel

```
class datarobot.models.DatetimeModel (id=None, processes=None, featurelist_name=None,
featurelist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, time_window_sample_pct=None, sampling_method=None, model_type=None, model_category=None, is_frozen=None, blueprint_id=None, metrics=None, training_info=None, holdout_score=None, holdout_status=None, data_selection_method=None, backtests=None, monotonic_increasing_featurelist_id=None, monotonic_decreasing_featurelist_id=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, effective_feature_derivation_window_start=None, effective_feature_derivation_window_end=None, forecast_window_start=None, forecast_window_end=None, windows_basis_unit=None, model_number=None, parent_model_id=None, use_project_settings=None, supports_composable_ml=None, n_clusters=None, is_n_clusters_dynamically_determined=None)
```

Represents a model from a datetime partitioned project

All durations are specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Note that only one of `training_row_count`, `training_duration`, and `training_start_date` and `training_end_date` will be specified, depending on the `data_selection_method` of the model. Whichever method was selected determines the amount of data used to train on when making predictions and scoring the backtests and the holdout.

Attributes

- id** [str] the id of the model
- project_id** [str] the id of the project the model belongs to
- processes** [list of str] the processes used by the model
- featurelist_name** [str] the name of the featurelist used by the model
- featurelist_id** [str] the id of the featurelist used by the model
- sample_pct** [float] the percentage of the project dataset used in training the model
- training_row_count** [int or None] If specified, an int specifying the number of rows used to train the model and evaluate backtest scores.
- training_duration** [str or None] If specified, a duration string specifying the duration spanned by the data used to train the model and evaluate backtest scores.
- training_start_date** [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the start date of the data used to train the model.

training_end_date [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the end date of the data used to train the model.

time_window_sample_pct [int or None] An integer between 1 and 99 indicating the percentage of sampling within the training window. The points kept are determined by a random uniform sample. If not specified, no sampling was done.

sampling_method [str or None] (New in v2.23) indicates the way training data has been selected (either how rows have been selected within backtest or how `time_window_sample_pct` has been applied).

model_type [str] what model this is, e.g. "Nystroem Kernel SVM Regressor"

model_category [str] what kind of model this is - "prime" for DataRobot Prime models, "blend" for blender models, and "model" for other models

is_frozen [bool] whether this model is a frozen model

blueprint_id [str] the id of the blueprint used in this model

metrics [dict] a mapping from each metric to the model's scores for that metric. The keys in metrics are the different metrics used to evaluate the model, and the values are the results. The dictionaries inside of metrics will be as described here: "validation", the score for a single backtest; "crossValidation", always None; "backtesting", the average score for all backtests if all are available and computed, or None otherwise; "backtestingScores", a list of scores for all backtests where the score is None if that backtest does not have a score available; and "holdout", the score for the holdout or None if the holdout is locked or the score is unavailable.

backtests [list of dict] describes what data was used to fit each backtest, the score for the project metric, and why the backtest score is unavailable if it is not provided.

data_selection_method [str] which of `training_row_count`, `training_duration`, or `training_start_data` and `training_end_date` were used to determine the data used to fit the model. One of "rowCount", "duration", or "selectedDateRange".

training_info [dict] describes which data was used to train on when scoring the holdout and making predictions. `training_info` will have the following keys: `holdout_training_start_date`, `holdout_training_duration`, `holdout_training_row_count`, `holdout_training_end_date`, `prediction_training_start_date`, `prediction_training_duration`, `prediction_training_row_count`, `prediction_training_end_date`. Start and end dates will be datetimes, durations will be duration strings, and rows will be integers.

holdout_score [float or None] the score against the holdout, if available and the holdout is unlocked, according to the project metric.

holdout_status [string or None] the status of the holdout score, e.g. "IJC_COMPLETED", "IJH_HOLDOUT_BOUNDARIES_EXCEEDED". Unavailable if the holdout fold was disabled in the partitioning configuration.

monotonic_increasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced.

monotonic_decreasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. If None, no such constraints are enforced.

supports_monotonic_constraints [bool] optional, whether this model supports enforcing monotonic constraints

is_starred [bool] whether this model marked as starred

prediction_threshold [float] for binary classification projects, the threshold used for predictions

prediction_threshold_read_only [bool] indicated whether modification of the prediction threshold is forbidden. Threshold modification is forbidden once a model has had a deployment created or predictions made via the dedicated prediction API.

effective_feature_derivation_window_start [int or None] (New in v2.16) For *time series* projects only. How many units of the `windows_basis_unit` into the past relative to the forecast point the user needs to provide history for at prediction time. This can differ from the `feature_derivation_window_start` set on the project due to the differencing method and period selected, or if the model is a time series native model such as ARIMA. Will be a negative integer in time series projects and `None` otherwise.

effective_feature_derivation_window_end [int or None] (New in v2.16) For *time series* projects only. How many units of the `windows_basis_unit` into the past relative to the forecast point the feature derivation window should end. Will be a non-positive integer in time series projects and `None` otherwise.

forecast_window_start [int or None] (New in v2.16) For *time series* projects only. How many units of the `windows_basis_unit` into the future relative to the forecast point the forecast window should start. Note that this field will be the same as what is shown in the project settings. Will be a non-negative integer in time series projects and `None` otherwise.

forecast_window_end [int or None] (New in v2.16) For *time series* projects only. How many units of the `windows_basis_unit` into the future relative to the forecast point the forecast window should end. Note that this field will be the same as what is shown in the project settings. Will be a non-negative integer in time series projects and `None` otherwise.

windows_basis_unit [str or None] (New in v2.16) For *time series* projects only. Indicates which unit is the basis for the feature derivation window and the forecast window. Note that this field will be the same as what is shown in the project settings. In time series projects, will be either the detected time unit or `âROWâ`, and `None` otherwise.

model_number [integer] model number assigned to a model

parent_model_id [str or None] (New in version v2.20) the id of the model that tuning parameters are derived from

use_project_settings [bool or None] (New in version v2.20) If `True`, indicates that the custom backtest partitioning settings specified by the user were used to train the model and evaluate backtest scores.

supports_composable_ml [bool or None] (New in version v2.26) whether this model is supported in the Composable ML.

is_n_clusters_dynamically_determined [bool, optional] (New in version 2.27) if `True`, indicates that model determines number of clusters automatically.

n_clusters [int, optional] (New in version 2.27) Number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that don't automatically determine the number of clusters.

classmethod `get` (*project, model_id*)

Retrieve a specific datetime model.

If the project does not use datetime partitioning, a `ClientError` will occur.

Parameters

project [str] the id of the project the model belongs to

model_id [str] the id of the model to retrieve

Returns

model [DatetimeModel] the model

score_backtests ()

Compute the scores for all available backtests.

Some backtests may be unavailable if the model is trained into their validation data.

Returns

job [Job] a job tracking the backtest computation. When it is complete, all available backtests will have scores computed.

cross_validate () → NoReturn

Inherited from the model. DatetimeModels cannot request cross validation scores; use backtests instead.

get_cross_validation_scores (*partition=None, metric=None*) → NoReturn

Inherited from Model - DatetimeModels cannot request Cross Validation scores,

Use `backtests` instead.

request_training_predictions (*data_subset, *args, **kwargs*)

Start a job that builds training predictions.

Parameters

data_subset [str] data set definition to build predictions on. Choices are:

- *dr.enums.DATA_SUBSET.HOLDOUT* for holdout data set only
- *dr.enums.DATA_SUBSET.ALL_BACKTESTS* for downloading the predictions for all backtest validation folds. Requires the model to have successfully scored all backtests.

Returns

Job

Job an instance of created async job

get_series_accuracy_as_dataframe (*offset=0, limit=100, metric=None, multi-series_value=None, order_by=None, reverse=False*)

Retrieve series accuracy results for the specified model as a pandas.DataFrame.

Parameters

offset [int, optional] The number of results to skip. Defaults to 0 if not specified.

limit [int, optional] The maximum number of results to return. Defaults to 100 if not specified.

metric [str, optional] The name of the metric to retrieve scores for. If omitted, the default project metric will be used.

multiseries_value [str, optional] If specified, only the series containing the given value in one of the series ID columns will be returned.

order_by [str, optional] Used for sorting the series. Attribute must be one of `datarobot.enums.SERIES_ACCURACY_ORDER_BY`.

reverse [bool, optional] Used for sorting the series. If `True`, will sort the series in descending order by the attribute specified by `order_by`.

Returns

data A pandas.DataFrame with the Series Accuracy for the specified model.

download_series_accuracy_as_csv (*filename*, *encoding='utf-8'*, *offset=0*, *limit=100*, *metric=None*, *multiseries_value=None*, *order_by=None*, *reverse=False*)

Save series accuracy results for the specified model in a CSV file.

Parameters

filename [str or file object] The path or file object to save the data to.

encoding [str, optional] A string representing the encoding to use in the output csv file. Defaults to 'utf-8'.

offset [int, optional] The number of results to skip. Defaults to 0 if not specified.

limit [int, optional] The maximum number of results to return. Defaults to 100 if not specified.

metric [str, optional] The name of the metric to retrieve scores for. If omitted, the default project metric will be used.

multiseries_value [str, optional] If specified, only the series containing the given value in one of the series ID columns will be returned.

order_by [str, optional] Used for sorting the series. Attribute must be one of `datarobot.enums.SERIES_ACCURACY_ORDER_BY`.

reverse [bool, optional] Used for sorting the series. If `True`, will sort the series in descending order by the attribute specified by `order_by`.

get_series_clusters (*offset: int = 0*, *limit: int = 100*, *order_by: Optional[str] = None*, *reverse: bool = False*) → Dict[str, str]

Retrieve a dictionary of series and the clusters assigned to each series. This is only usable for clustering projects.

Parameters

offset [int, optional] The number of results to skip. Defaults to 0 if not specified.

limit [int, optional] The maximum number of results to return. Defaults to 100 if not specified.

order_by [str, optional] Used for sorting the series. Attribute must be one of `datarobot.enums.SERIES_ACCURACY_ORDER_BY`.

reverse [bool, optional] Used for sorting the series. If `True`, will sort the series in descending order by the attribute specified by `order_by`.

Returns

Dict A dictionary of the series in the dataset with their associated cluster

Raises

ValueError If the model type returns an unsupported insight

ClientError If the insight is not available for this model

compute_series_accuracy (*compute_all_series=False*)

Compute series accuracy for the model.

Parameters

compute_all_series [bool, optional] Calculate accuracy for all series or only first 1000.

Returns

Job an instance of the created async job

retrain (*time_window_sample_pct=None*, *featurelist_id=None*, *training_row_count=None*, *training_duration=None*, *training_start_date=None*, *training_end_date=None*, *sampling_method=None*, *n_clusters=None*)

Retrain an existing datetime model using a new training period for the model's training set (with optional time window sampling) or a different feature list.

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

featurelist_id [str, optional] The ID of the featurelist to use.

training_row_count [int, optional] The number of rows to train the model on. If this parameter is used then *sample_pct* cannot be specified.

time_window_sample_pct [int, optional] An int between 1 and 99 indicating the percentage of sampling within the time window. The points kept are determined by a random uniform sample. If specified, *training_row_count* must not be specified and either *training_duration* or *training_start_date* and *training_end_date* must be specified.

training_duration [str, optional] A duration string representing the training duration for the submitted model. If specified then *training_row_count*, *training_start_date*, and *training_end_date* cannot be specified.

training_start_date [str, optional] A datetime string representing the start date of the data to use for training this model. If specified, *training_end_date* must also be specified, and *training_duration* cannot be specified. The value must be before the *training_end_date* value.

training_end_date [str, optional] A datetime string representing the end date of the data to use for training this model. If specified, *training_start_date* must also be specified, and *training_duration* cannot be specified. The value must be after the *training_start_date* value.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either *random* or *latest*. In combination with *training_row_count* defines how rows are selected from backtest (*latest* by default). When training data is defined using time range (*training_duration* or *use_project_settings*) this setting changes the way *time_window_sample_pct* is applied (*random* by default). Applicable to OTV projects only.

n_clusters [int, optional] (New in version 2.27) Number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that don't automatically determine the number of clusters.

Returns

job [ModelJob] The created job that is retraining the model

get_feature_effect_metadata ()

Retrieve Feature Effect metadata for each backtest. Response contains status and available sources for each backtest of the model.

- Each backtest is available for *training* and *validation*
- If holdout is configured for the project it has *holdout* as *backtestIndex*. It has *training* and *holdout* sources available.

Start/stop models contain a single response item with *startstop* value for *backtestIndex*.

- Feature Effect of *training* is always available (except for the old project which supports only Feature Effect for *validation*).
- When a model is trained into *validation* or *holdout* without stacked prediction (e.g. no out-of-sample prediction in *validation* or *holdout*), Feature Effect is not available for *validation* or *holdout*.
- Feature Effect for *holdout* is not available when there is no holdout configured for the project.

source is expected parameter to retrieve Feature Effect. One of provided sources shall be used.

backtestIndex is expected parameter to submit compute request and retrieve Feature Effect. One of provided backtest indexes shall be used.

Returns

feature_effect_metadata: FeatureEffectMetadataDatetime

`get_feature_fit_metadata()`

Retrieve Feature Fit metadata for each backtest. Response contains status and available sources for each backtest of the model.

- Each backtest is available for *training* and *validation*
- If holdout is configured for the project it has *holdout* as *backtestIndex*. It has *training* and *holdout* sources available.

Start/stop models contain a single response item with *startstop* value for *backtestIndex*.

- Feature Fit of *training* is always available (except for the old project which supports only Feature Effect for *validation*).
- When a model is trained into *validation* or *holdout* without stacked prediction (e.g. no out-of-sample prediction in *validation* or *holdout*), Feature Fit is not available for *validation* or *holdout*.
- Feature Fit for *holdout* is not available when there is no holdout configured for the project.

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

backtestIndex is expected parameter to submit compute request and retrieve Feature Fit. One of provided backtest indexes shall be used.

Returns

feature_effect_metadata: FeatureFitMetadataDatetime

`request_feature_effect(backtest_index)`

Request feature effects to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

See [get_feature_effect_metadata](#) for retrieving information of *backtest_index*.

Parameters

backtest_index: string, FeatureEffectMetadataDatetime.backtest_index. The backtest index to retrieve Feature Effects for.

Returns

job [Job] A Job representing the feature effect computation. To get the completed feature effect data, use *job.get_result* or *job.get_result_when_complete*.

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

`get_feature_effect` (*source*, *backtest_index*)

Retrieve Feature Effects for the model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information of source, backtest_index.

Parameters

source: **string** The source Feature Effects are retrieved for. One value of [FeatureEffectMetadataDatetime.sources]. To retrieve the available sources for feature effect.

backtest_index: **string, FeatureEffectMetadataDatetime.backtest_index.** The backtest index to retrieve Feature Effects for.

Returns

feature_effects: **FeatureEffects** The feature effects data.

Raises

ClientError (404) If the feature effects have not been computed or source is not valid value.

`get_or_request_feature_effect` (*source*, *backtest_index*, *max_wait=600*)

Retrieve feature effect for the model, requesting a job if it hasn't been run previously

See `get_feature_effect_metadata` for retrieving information of source, backtest_index.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature effect job to complete before erroring

source [string] The source Feature Effects are retrieved for. One value of [FeatureEffectMetadataDatetime.sources]. To retrieve the available sources for feature effect.

backtest_index: **string, FeatureEffectMetadataDatetime.backtest_index.** The backtest index to retrieve Feature Effects for.

Returns

feature_effects [FeatureEffects] The feature effects data.

`request_feature_effects_multiclass` (*backtest_index*, *row_count=None*,
top_n_features=None, *features=None*)

Request feature effects to be computed for the multiclass datetime model.

See `get_feature_effect` for more information on the result of the job.

Parameters

backtest_index [str] The backtest index to use for Feature Effects calculation.

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by Feature Impact) used to calculate Feature Effects.

features [list or None] The list of features to use to calculate Feature Effects.

Returns

job [Job] A Job representing Feature Effects computation. To get the completed Feature Effect data, use `job.get_result` or `job.get_result_when_complete`.

get_feature_effects_multiclass (*backtest_index*, *source='training'*, *class_=None*)

Retrieve Feature Effects for the multiclass datetime model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information the available sources.

Parameters

backtest_index [str] The backtest index to retrieve Feature Effects for.

source [str] The source Feature Effects are retrieved for.

class_ [str or None] The class name Feature Effects are retrieved for.

Returns

list The list of multiclass Feature Effects.

Raises

ClientError (404) If the Feature Effects have not been computed or source is not valid value.

get_or_request_feature_effects_multiclass (*backtest_index*, *source*,
top_n_features=None, *features=None*,
row_count=None, *class_=None*,
max_wait=600)

Retrieve Feature Effects for a datetime multiclass model, and request a job if it hasn't been run previously.

Parameters

backtest_index [str] The backtest index to retrieve Feature Effects for.

source [string] The source from which Feature Effects are retrieved.

class_ [str or None] The class name Feature Effects retrieve for.

row_count [int] The number of rows used from the dataset for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by feature impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

max_wait [int, optional] The maximum time to wait for a requested feature effect job to complete before erroring.

Returns

feature_effects [list of FeatureEffectsMulticlass] The list of multiclass feature effects data.

request_feature_fit (*backtest_index*)

Request feature fit to be computed for the model.

See [get_feature_fit](#) for more information on the result of the job.

See [get_feature_fit_metadata](#) for retrieving information of `backtest_index`.

Parameters

backtest_index: **string**, **FeatureFitMetadataDatetime.backtest_index**. The backtest index to retrieve Feature Fit for.

Returns

job [Job] A Job representing the feature fit computation. To get the completed feature fit data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature fit have already been requested.

get_feature_fit (*source*, *backtest_index*)

Retrieve Feature Fit for the model.

Feature Fit provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Fit has already been computed with [request_feature_fit](#).

See [get_feature_fit_metadata](#) for retrieving information of `source`, `backtest_index`.

Parameters

source: **string** The source Feature Fit are retrieved for. One value of [FeatureFitMetadataDatetime.sources]. To retrieve the available sources for feature fit.

backtest_index: **string**, **FeatureFitMetadataDatetime.backtest_index**. The backtest index to retrieve Feature Fit for.

Returns

feature_fit: **FeatureFit** The feature fit data.

Raises

ClientError (404) If the feature fit have not been computed or source is not valid value.

get_or_request_feature_fit (*source*, *backtest_index*, *max_wait=600*)

Retrieve feature fit for the model, requesting a job if it hasn't been run previously

See [get_feature_fit_metadata](#) for retrieving information of `source`, `backtest_index`.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature fit job to complete before erroring

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadataDatetime.sources]. To retrieve the available sources for feature effect.

backtest_index: **string**, **FeatureFitMetadataDatetime.backtest_index**. The backtest index to retrieve Feature Fit for.

Returns

feature_fit [FeatureFit] The feature fit data.

calculate_prediction_intervals (*prediction_intervals_size: int*) → Job
Calculate prediction intervals for this DatetimeModel for the specified size.

New in version v2.19.

Parameters

prediction_intervals_size [int] The prediction interval's size to calculate for this model.
See the *prediction intervals* documentation for more information.

Returns

job [Job] a *Job* tracking the prediction intervals computation

get_calculated_prediction_intervals (*offset=None, limit=None*)
Retrieve a list of already-calculated prediction intervals for this model

New in version v2.19.

Parameters

offset [int, optional] If provided, this many results will be skipped

limit [int, optional] If provided, at most this many results will be returned. If not provided, will return at most 100 results.

Returns

list[int] A descending-ordered list of already-calculated prediction interval sizes

compute_datetime_trend_plots (*backtest=0, source='validation', forecast_distance_start=None, forecast_distance_end=None*)

Computes datetime trend plots (Accuracy over Time, Forecast vs Actual, Anomaly over Time) for this model

New in version v2.25.

Parameters

backtest [int or string, optional] Compute plots for a specific backtest (use the backtest index starting from zero). To compute plots for holdout, use `dr.enums.DATA_SUBSET.HOLDOUT`

source [string, optional] The source of the data for the backtest/holdout. Attribute must be one of `dr.enums.SOURCE_TYPE`

forecast_distance_start [int, optional:] The start of forecast distance range (forecast window) to compute. If not specified, the first forecast distance for this project will be used. Only for time series supervised models

forecast_distance_end [int, optional:] The end of forecast distance range (forecast window) to compute. If not specified, the last forecast distance for this project will be used. Only for time series supervised models

Returns

job [Job] a *Job* tracking the datetime trend plots computation

Notes

- Forecast distance specifies the number of time steps between the predicted point and the origin point.
- For the multiseried models only first 1000 series in alphabetical order and an average plot for them will be computed.
- Maximum 100 forecast distances can be requested for calculation in time series supervised projects.

get_accuracy_over_time_plots_metadata (*forecast_distance=None*)

Retrieve Accuracy over Time plots metadata for this model.

New in version v2.25.

Parameters

forecast_distance [int, optional] Forecast distance to retrieve the metadata for. If not specified, the first forecast distance for this project will be used. Only available for time series projects.

Returns

metadata [AccuracyOverTimePlotsMetadata] a *AccuracyOverTimePlotsMetadata* representing Accuracy over Time plots metadata

get_accuracy_over_time_plot (*backtest=0, source='validation', forecast_distance=None, series_id=None, resolution=None, max_bin_size=None, start_date=None, end_date=None, max_wait=600*)

Retrieve Accuracy over Time plots for this model.

New in version v2.25.

Parameters

backtest [int or string, optional] Retrieve plots for a specific backtest (use the backtest index starting from zero). To retrieve plots for holdout, use `dr.enums.DATA_SUBSET.HOLDOUT`

source [string, optional] The source of the data for the backtest/holdout. Attribute must be one of `dr.enums.SOURCE_TYPE`

forecast_distance [int, optional] Forecast distance to retrieve the plots for. If not specified, the first forecast distance for this project will be used. Only available for time series projects.

series_id [string, optional] The name of the series to retrieve for multiseried projects. If not provided an average plot for the first 1000 series will be retrieved.

resolution [string, optional] Specifying at which resolution the data should be binned. If not provided an optimal resolution will be used to build chart data with number of bins \leq `max_bin_size`. One of `dr.enums.DATETIME_TREND_PLOTS_RESOLUTION`.

max_bin_size [int, optional] An int between 1 and 1000, which specifies the maximum number of bins for the retrieval. Default is 500.

start_date [datetime.datetime, optional] The start of the date range to return. If not specified, start date for requested plot will be used.

end_date [datetime.datetime, optional] The end of the date range to return. If not specified, end date for requested plot will be used.

max_wait [int or None, optional] The maximum time to wait for a compute job to complete before retrieving the plots. Default is `dr.enums.DEFAULT_MAX_WAIT`. If 0 or None, the plots would be retrieved without attempting the computation.

Returns

plot [AccuracyOverTimePlot] a *AccuracyOverTimePlot* representing Accuracy over Time plot

Examples

```
import datarobot as dr
import pandas as pd
model = dr.DatetimeModel(project_id=project_id, id=model_id)
plot = model.get_accuracy_over_time_plot()
df = pd.DataFrame.from_dict(plot.bins)
figure = df.plot("start_date", ["actual", "predicted"]).get_figure()
figure.savefig("accuracy_over_time.png")
```

get_accuracy_over_time_plot_preview (*backtest=0, source='validation', forecast_distance=None, series_id=None, max_wait=600*)

Retrieve Accuracy over Time preview plots for this model.

New in version v2.25.

Parameters

backtest [int or string, optional] Retrieve plots for a specific backtest (use the backtest index starting from zero). To retrieve plots for holdout, use `dr.enums.DATA_SUBSET.HOLDOUT`

source [string, optional] The source of the data for the backtest/holdout. Attribute must be one of `dr.enums.SOURCE_TYPE`

forecast_distance [int, optional] Forecast distance to retrieve the plots for. If not specified, the first forecast distance for this project will be used. Only available for time series projects.

series_id [string, optional] The name of the series to retrieve for multiserries projects. If not provided an average plot for the first 1000 series will be retrieved.

max_wait [int or None, optional] The maximum time to wait for a compute job to complete before retrieving the plots. Default is `dr.enums.DEFAULT_MAX_WAIT`. If 0 or None, the plots would be retrieved without attempting the computation.

Returns

plot [AccuracyOverTimePlotPreview] a *AccuracyOverTimePlotPreview* representing Accuracy over Time plot preview

Examples

```
import datarobot as dr
import pandas as pd
model = dr.DatetimeModel(project_id=project_id, id=model_id)
plot = model.get_accuracy_over_time_plot_preview()
df = pd.DataFrame.from_dict(plot.bins)
figure = df.plot("start_date", ["actual", "predicted"]).get_figure()
figure.savefig("accuracy_over_time_preview.png")
```

get_forecast_vs_actual_plots_metadata()

Retrieve Forecast vs Actual plots metadata for this model.

New in version v2.25.

Returns

metadata [ForecastVsActualPlotsMetadata] a *ForecastVsActualPlotsMetadata* representing Forecast vs Actual plots metadata

get_forecast_vs_actual_plot (*backtest=0*, *source='validation'*, *forecast_distance_start=None*, *forecast_distance_end=None*, *series_id=None*, *resolution=None*, *max_bin_size=None*, *start_date=None*, *end_date=None*, *max_wait=600*)

Retrieve Forecast vs Actual plots for this model.

New in version v2.25.

Parameters

backtest [int or string, optional] Retrieve plots for a specific backtest (use the backtest index starting from zero). To retrieve plots for holdout, use `dr.enums.DATA_SUBSET.HOLDOUT`

source [string, optional] The source of the data for the backtest/holdout. Attribute must be one of `dr.enums.SOURCE_TYPE`

forecast_distance_start [int, optional:] The start of forecast distance range (forecast window) to retrieve. If not specified, the first forecast distance for this project will be used.

forecast_distance_end [int, optional:] The end of forecast distance range (forecast window) to retrieve. If not specified, the last forecast distance for this project will be used.

series_id [string, optional] The name of the series to retrieve for multiserries projects. If not provided an average plot for the first 1000 series will be retrieved.

resolution [string, optional] Specifying at which resolution the data should be binned. If not provided an optimal resolution will be used to build chart data with number of bins \leq `max_bin_size`. One of `dr.enums.DATETIME_TREND_PLOTS_RESOLUTION`.

max_bin_size [int, optional] An int between 1 and 1000, which specifies the maximum number of bins for the retrieval. Default is 500.

start_date [datetime.datetime, optional] The start of the date range to return. If not specified, start date for requested plot will be used.

end_date [datetime.datetime, optional] The end of the date range to return. If not specified, end date for requested plot will be used.

max_wait [int or None, optional] The maximum time to wait for a compute job to complete before retrieving the plots. Default is `dr.enums.DEFAULT_MAX_WAIT`. If 0 or None, the plots would be retrieved without attempting the computation.

Returns

plot [ForecastVsActualPlot] a *ForecastVsActualPlot* representing Forecast vs Actual plot

Examples

```

import datarobot as dr
import pandas as pd
import matplotlib.pyplot as plt

model = dr.DatetimeModel(project_id=project_id, id=model_id)
plot = model.get_forecast_vs_actual_plot()
df = pd.DataFrame.from_dict(plot.bins)

# As an example, get the forecasts for the 10th point
forecast_point_index = 10
# Pad the forecasts for plotting. The forecasts length must match the df_
↪length
forecasts = [None] * forecast_point_index + df.forecasts[forecast_point_index:]
forecasts = forecasts + [None] * (len(df) - len(forecasts))

plt.plot(df.start_date, df.actual, label="Actual")
plt.plot(df.start_date, forecasts, label="Forecast")
forecast_point = df.start_date[forecast_point_index]
plt.title("Forecast vs Actual (Forecast Point {})".format(forecast_point))
plt.legend()
plt.savefig("forecast_vs_actual.png")

```

get_forecast_vs_actual_plot_preview(*backtest=0*, *source='validation'*, *series_id=None*, *max_wait=600*)

Retrieve Forecast vs Actual preview plots for this model.

New in version v2.25.

Parameters

backtest [int or string, optional] Retrieve plots for a specific backtest (use the backtest index starting from zero). To retrieve plots for holdout, use `dr.enums.DATA_SUBSET.HOLDOUT`

source [string, optional] The source of the data for the backtest/holdout. Attribute must be one of `dr.enums.SOURCE_TYPE`

series_id [string, optional] The name of the series to retrieve for multiserries projects. If not provided an average plot for the first 1000 series will be retrieved.

max_wait [int or None, optional] The maximum time to wait for a compute job to complete before retrieving the plots. Default is `dr.enums.DEFAULT_MAX_WAIT`. If 0 or None, the plots would be retrieved without attempting the computation.

Returns

plot [ForecastVsActualPlotPreview] a *ForecastVsActualPlotPreview* representing Forecast vs Actual plot preview

Examples

```

import datarobot as dr
import pandas as pd

model = dr.DatetimeModel(project_id=project_id, id=model_id)
plot = model.get_forecast_vs_actual_plot_preview()
df = pd.DataFrame.from_dict(plot.bins)
figure = df.plot("start_date", ["actual", "predicted"]).get_figure()
figure.savefig("forecast_vs_actual_preview.png")

```

`get_anomaly_over_time_plots_metadata()`

Retrieve Anomaly over Time plots metadata for this model.

New in version v2.25.

Returns

metadata [AnomalyOverTimePlotsMetadata] a *AnomalyOverTimePlotsMetadata* representing Anomaly over Time plots metadata

`get_anomaly_over_time_plot(backtest=0, source='validation', series_id=None, resolution=None, max_bin_size=None, start_date=None, end_date=None, max_wait=600)`

Retrieve Anomaly over Time plots for this model.

New in version v2.25.

Parameters

backtest [int or string, optional] Retrieve plots for a specific backtest (use the backtest index starting from zero). To retrieve plots for holdout, use `dr.enums.DATA_SUBSET.HOLDOUT`

source [string, optional] The source of the data for the backtest/holdout. Attribute must be one of `dr.enums.SOURCE_TYPE`

series_id [string, optional] The name of the series to retrieve for multiserries projects. If not provided an average plot for the first 1000 series will be retrieved.

resolution [string, optional] Specifying at which resolution the data should be binned. If not provided an optimal resolution will be used to build chart data with number of bins \leq `max_bin_size`. One of `dr.enums.DATETIME_TREND_PLOTS_RESOLUTION`.

max_bin_size [int, optional] An int between 1 and 1000, which specifies the maximum number of bins for the retrieval. Default is 500.

start_date [datetime.datetime, optional] The start of the date range to return. If not specified, start date for requested plot will be used.

end_date [datetime.datetime, optional] The end of the date range to return. If not specified, end date for requested plot will be used.

max_wait [int or None, optional] The maximum time to wait for a compute job to complete before retrieving the plots. Default is `dr.enums.DEFAULT_MAX_WAIT`. If 0 or None, the plots would be retrieved without attempting the computation.

Returns

plot [AnomalyOverTimePlot] a *AnomalyOverTimePlot* representing Anomaly over Time plot

Examples

```
import datarobot as dr
import pandas as pd
model = dr.DatetimeModel(project_id=project_id, id=model_id)
plot = model.get_anomaly_over_time_plot()
df = pd.DataFrame.from_dict(plot.bins)
figure = df.plot("start_date", "predicted").get_figure()
figure.savefig("anomaly_over_time.png")
```

`get_anomaly_over_time_plot_preview` (*prediction_threshold=0.5*, *backtest=0*,
source='validation', *series_id=None*,
max_wait=600)

Retrieve Anomaly over Time preview plots for this model.

New in version v2.25.

Parameters

prediction_threshold: float, optional Only bins with predictions exceeding this threshold will be returned in the response.

backtest [int or string, optional] Retrieve plots for a specific backtest (use the backtest index starting from zero). To retrieve plots for holdout, use `dr.enums.DATA_SUBSET.HOLDOUT`

source [string, optional] The source of the data for the backtest/holdout. Attribute must be one of `dr.enums.SOURCE_TYPE`

series_id [string, optional] The name of the series to retrieve for multiseries projects. If not provided an average plot for the first 1000 series will be retrieved.

max_wait [int or None, optional] The maximum time to wait for a compute job to complete before retrieving the plots. Default is `dr.enums.DEFAULT_MAX_WAIT`. If 0 or None, the plots would be retrieved without attempting the computation.

Returns

plot [AnomalyOverTimePlotPreview] a `AnomalyOverTimePlotPreview` representing Anomaly over Time plot preview

Examples

```
import datarobot as dr
import pandas as pd
import matplotlib.pyplot as plt

model = dr.DatetimeModel(project_id=project_id, id=model_id)
plot = model.get_anomaly_over_time_plot_preview(prediction_threshold=0.01)
df = pd.DataFrame.from_dict(plot.bins)
x = pd.date_range(
    plot.start_date, plot.end_date, freq=df.end_date[0] - df.start_date[0]
)
plt.plot(x, [0] * len(x), label="Date range")
plt.plot(df.start_date, [0] * len(df.start_date), "ro", label="Anomaly")
plt.yticks([])
plt.legend()
plt.savefig("anomaly_over_time_preview.png")
```

initialize_anomaly_assessment (*backtest*, *source*, *series_id=None*)

Initialize the anomaly assessment insight and calculate Shapley explanations for the most anomalous points in the subset. The insight is available for anomaly detection models in time series unsupervised projects which also support calculation of Shapley values.

Parameters

backtest: int starting with 0 or `holdout` The backtest to compute insight for.

source: `training` or `validation` The source to compute insight for.

series_id: string Required for multiserries projects. The series id to compute insight for. Say if there is a series column containing cities, the example of the series name to pass would be `â€œIJBostonâ€œ`

Returns

AnomalyAssessmentRecord

get_anomaly_assessment_records (*backtest=None, source=None, series_id=None, limit=100, offset=0, with_data_only=False*)

Retrieve computed Anomaly Assessment records for this model. Model must be an anomaly detection model in time series unsupervised project which also supports calculation of Shapley values.

Records can be filtered by the data backtest, source and series_id. The results can be limited.

New in version v2.25.

Parameters

backtest: int starting with 0 or `â€œIJholdoutâ€œ` The backtest of the data to filter records by.

source: `â€œIJtrainingâ€œ` or `â€œIJvalidationâ€œ` The source of the data to filter records by.

series_id: string The series id to filter records by.

limit: int, optional

offset: int, optional

with_data_only: bool, optional Whether to return only records with preview and explanations available. False by default.

Returns

records [list of AnomalyAssessmentRecord] a *AnomalyAssessmentRecord* representing Anomaly Assessment Record

get_feature_impact (*with_metadata=False, backtest=None*)

Retrieve the computed Feature Impact results, a measure of the relevance of each feature in the model.

Feature Impact is computed for each column by creating new data with that column randomly permuted (but the others left unchanged), and seeing how the error metric score for the predictions is affected. The `â€œImpactUnnormalizedâ€œ` is how much worse the error metric score is when making predictions on this modified data. The `â€œImpactNormalizedâ€œ` is normalized so that the largest value is 1. In both cases, larger values indicate more important features.

If a feature is a redundant feature, i.e. once other features are considered it doesn't contribute much in addition, the `â€œredundantWithâ€œ` value is the name of feature that has the highest correlation with this feature. Note that redundancy detection is only available for jobs run after the addition of this feature. When retrieving data that predates this functionality, a `NoRedundancyImpactAvailable` warning will be used.

Elsewhere this technique is sometimes called `â€œPermutation Importanceâ€œ`.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Parameters

with_metadata [bool] The flag indicating if the result should include the metadata as well.

backtest [int or string] The index of the backtest unless it is holdout then it is string `â€œholdoutâ€œ`. This is supported only in *DatetimeModels*

Returns

list or dict The feature impact data response depends on the `with_metadata` parameter. The response is either a dict with metadata and a list with actual data or just a list with that data.

Each List item is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, `redundantWith` and `count`.

For dict response available keys are:

- **featureImpacts** - Feature Impact data as a dictionary. Each item is a dict with keys: `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.
- **shapBased** - A boolean that indicates whether Feature Impact was calculated using Shapley values.
- **ranRedundancyDetection** - A boolean that indicates whether redundant feature identification was run while calculating this Feature Impact.
- **rowCount** - An integer or None that indicates the number of rows that was used to calculate Feature Impact. For the Feature Impact calculated with the default logic, without specifying the `rowCount`, we return None here.
- `count` - An integer with the number of features under the `featureImpacts`.

Raises

ClientError (404) If the feature impacts have not been computed.

request_feature_impact (*row_count=None, with_metadata=False, backtest=None*)
Request feature impacts to be computed for the model.

See [get_feature_impact](#) for more information on the result of the job.

Parameters

row_count [int] The sample size (specified in rows) to use for Feature Impact computation. This is not supported for unsupervised, multi-class (that has a separate method) and time series projects.

backtest [int or string] The index of the backtest unless it is holdout then it is string "holdout". This is supported only in `DatetimeModels`

Returns

job [Job] A Job representing the feature impact computation. To get the completed feature impact data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature impacts have already been requested.

get_or_request_feature_impact (*max_wait=600, row_count=None, with_metadata=False, backtest=None*)

Retrieve feature impact for the model, requesting a job if it hasn't been run previously

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature impact job to complete before erroring

****kwargs** Arbitrary keyword arguments passed to [request_feature_impact](#).

Returns

feature_impacts [list or dict] The feature impact data. See `get_feature_impact` for the exact schema.

advanced_tune (*params*, *description: Optional[str] = None*) → ModelJob

Generate a new model with the specified advanced-tuning parameters

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Parameters

params [dict] Mapping of parameter ID to parameter value. The list of valid parameter IDs for a model can be found by calling `get_advanced_tuning_parameters()`. This endpoint does not need to include values for all parameters. If a parameter is omitted, its *current_value* will be used.

description [str] Human-readable string describing the newly advanced-tuned model

Returns

ModelJob The created job to build the model

delete () → None

Delete a model from the project's leaderboard.

download_export (*filepath: str*) → None

Download an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

Parameters

filepath [str] The path at which to save the exported model file.

download_scoring_code (*file_name*, *source_code=False*)

Download the Scoring Code JAR.

Parameters

file_name [str] File path where scoring code will be saved.

source_code [bool, optional] Set to True to download source code archive. It will not be executable.

download_training_artifact (*file_name*)

Retrieve trained artifact(s) from a model containing one or more custom tasks.

Artifact(s) will be downloaded to the specified local filepath.

Parameters

file_name [str] File path where trained model artifact(s) will be saved.

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

get_advanced_tuning_parameters () → AdvancedTuningParamsType

Get the advanced-tuning parameters available for this model.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

dict A dictionary describing the advanced-tuning parameters for the current model. There are two top-level keys, *tuning_description* and *tuning_parameters*.

tuning_description an optional value. If not *None*, then it indicates the user-specified description of this set of tuning parameter.

tuning_parameters is a list of a dicts, each has the following keys

- **parameter_name** : (**str**) name of the parameter (unique per task, see below)
- **parameter_id** : (**str**) opaque ID string uniquely identifying parameter
- **default_value** : (*) the actual value used to train the model; either the single value of the parameter specified before training, or the best value from the list of grid-searched values (based on *current_value*)
- **current_value** : (*) the single value or list of values of the parameter that were grid searched. Depending on the grid search specification, could be a single fixed value (no grid search), a list of discrete values, or a range.
- **task_name** : (**str**) name of the task that this parameter belongs to
- **constraints**: (**dict**) see the notes below
- **vertex_id**: (**str**) ID of vertex that this parameter belongs to

Notes

The type of *default_value* and *current_value* is defined by the *constraints* structure. It will be a string or numeric Python type.

constraints is a dict with *at least one*, possibly more, of the following keys. The presence of a key indicates that the parameter may take on the specified type. (If a key is absent, this means that the parameter may not take on the specified type.) If a key on *constraints* is present, its value will be a dict containing all of the fields described below for that key.

```
"constraints": {
  "select": {
    "values": [<list (basestring or number) : possible values>]
  },
  "ascii": {},
  "unicode": {},
  "int": {
    "min": <int : minimum valid value>,
    "max": <int : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  },
  "float": {
    "min": <float : minimum valid value>,
    "max": <float : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  },
  "intList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>,
    "min_val": <int : minimum valid value>,
```

(continues on next page)

(continued from previous page)

```

    "max_val": <int : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  },
  "floatList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <float : minimum valid value>,
    "max_val": <float : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                           requested for this param>
  }
}

```

The keys have meaning as follows:

- *select*: Rather than specifying a specific data type, if present, it indicates that the parameter is permitted to take on any of the specified values. Listed values may be of any string or real (non-complex) numeric type.
- *ascii*: The parameter may be a *unicode* object that encodes simple ASCII characters. (A-Z, a-z, 0-9, whitespace, and certain common symbols.) In addition to listed constraints, ASCII keys currently may not contain either newlines or semicolons.
- *unicode*: The parameter may be any Python *unicode* object.
- *int*: The value may be an object of type *int* within the specified range (inclusive). Please note that the value will be passed around using the JSON format, and some JSON parsers have undefined behavior with integers outside of the range $[-(2^{53})+1, (2^{53})-1]$.
- *float*: The value may be an object of type *float* within the specified range (inclusive).
- *intList*, *floatList*: The value may be a list of *int* or *float* objects, respectively, following constraints as specified respectively by the *int* and *float* types (above).

Many parameters only specify one key under *constraints*. If a parameter specifies multiple keys, the parameter may take on any value permitted by any key.

get_all_confusion_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all confusion matrices available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent for any source that is not available for this model and if this has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ConfusionChart Data for all available confusion charts for model.

get_all_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_multiclass_lift_charts (*fallback_to_parent_insights=False*)
Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_residuals_charts (*fallback_to_parent_insights=False*)
Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ResidualsChart Data for all available model residuals charts.

get_all_roc_curves (*fallback_to_parent_insights=False*)
Retrieve a list of all ROC curves available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of RocCurve Data for all available model ROC curves.

get_confusion_chart (*source, fallback_to_parent_insights=False*)
Retrieve them model's confusion matrix for the specified source.

Parameters

source [str] Confusion chart source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent if the confusion chart is not available for this model and the defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

ConfusionChart Model ConfusionChart data

Raises

ClientError If the insight is not available for this model

get_cross_class_accuracy_scores ()

Retrieves a list of Cross Class Accuracy scores for the model.

Returns

json

get_data_disparity_insights (*feature, class_name1, class_name2*)

Retrieve a list of Cross Class Data Disparity insights for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

class_name1 [str] One of the compared classes

class_name2 [str] Another compared class

Returns

json

get_fairness_insights (*fairness_metrics_set=None, offset=0, limit=100*)

Retrieve a list of Per Class Bias insights for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>. The fairness metric used to calculate the fairness scores.

offset [int, optional] Number of items to skip.

limit [int, optional] Number of items to return.

Returns

json

get_features_used () → List[str]

Query the server to determine which features were used.

Note that the data returned by this method is possibly different than the names of the features in the featurelist used by this model. This method will return the raw features that must be supplied in order for predictions to be generated on a new set of data. The featurelist, in contrast, would also include the names of derived features.

Returns

features [list of str] The names of the features used in the model.

get_frozen_child_models ()

Retrieve the IDs for all models that are frozen from this model.

Returns

A list of Models

get_labelwise_roc_curves (*source, fallback_to_parent_insights=False*)

Retrieve a list of LabelwiseRocCurve instances for a multilabel model the given source and all labels.

New in version v2.24.

Parameters

source [str] ROC curve data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

list of [class:*LabelwiseRocCurve* <*datarobot.models.roc_curve.LabelwiseRocCurve*>] Labelwise ROC Curve instances for `source` and all labels

Raises

ClientError If the insight is not available for this model

(New in version v3.0) TypeError If the underlying project type is binary

`get_leaderboard_ui_permalink ()` → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

`get_lift_chart (source, fallback_to_parent_insights=False)`

Retrieve the model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values. (New in version v2.23) For time series and OTV models, also accepts values `backtest_2`, `backtest_3`, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

LiftChart Model lift chart data

Raises

ClientError If the insight is not available for this model

`get_missing_report_info ()`

Retrieve a report on missing training data that can be used to understand missing values treatment in the model. The report consists of missing values resolutions for features numeric or categorical features that were part of building the model.

Returns

An iterable of MissingReportPerFeature The queried model missing report, sorted by missing count (DESCENDING order).

`get_model_blueprint_chart ()`

Retrieve a diagram that can be used to understand data flow in the blueprint.

Returns

ModelBlueprintChart The queried model blueprint chart.

get_model_blueprint_documents ()

Get documentation for tasks used in this model.

Returns

list of BlueprintTaskDocument All documents available for the model.

get_multiclass_feature_impact ()

For multiclass it's possible to calculate feature impact separately for each target class. The method for calculation is exactly the same, calculated in one-vs-all style for each target class.

Requires that Feature Impact has already been computed with *request_feature_impact*.

Returns

feature_impacts [list of dict] The feature impact data. Each item is a dict with the keys *featureImpacts* (list), *class* (str). Each item in *featureImpacts* is a dict with the keys *featureName*, *impactNormalized*, and *impactUnnormalized*, and *redundantWith*.

Raises

ClientError (404) If the multiclass feature impacts have not been computed.

get_multiclass_lift_chart (*source, fallback_to_parent_insights=False*)

Retrieve model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check *datarobot.enums.CHART_DATA_SOURCE* for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_multilabel_lift_charts (*source, fallback_to_parent_insights=False*)

Retrieve model Lift charts for the specified source.

New in version v2.24.

Parameters

source [str] Lift chart data source. Check *datarobot.enums.CHART_DATA_SOURCE* for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_num_iterations_trained()

Retrieves the number of estimators trained by early-stopping tree-based models.

– versionadded:: v2.22

Returns

projectId: str id of project containing the model

modelId: str id of the model

data: array list of *numEstimatorsItem* objects, one for each modeling stage.

numEstimatorsItem will be of the form:

stage: str indicates the modeling stage (for multi-stage models); None of single-stage models

numIterations: int the number of estimators or iterations trained by the model

get_parameters()

Retrieve model parameters.

Returns

ModelParameters Model parameters for this model.

get_pareto_front()

Retrieve the Pareto Front for a Eureqa model.

This method is only supported for Eureqa models.

Returns

ParetoFront Model ParetoFront data

get_prime_eligibility()

Check if this model can be approximated with DataRobot Prime

Returns

prime_eligibility [dict] a dict indicating whether a model can be approximated with DataRobot Prime (key *can_make_prime*) and why it may be ineligible (key *message*)

get_residuals_chart(source, fallback_to_parent_insights=False)

Retrieve model residuals chart for the specified source.

Parameters

source [str] Residuals chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent if the residuals chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return residuals data from this model's parent.

Returns

ResidualsChart Model residuals chart data

Raises

ClientError If the insight is not available for this model

get_roc_curve (*source*, *fallback_to_parent_insights=False*)

Retrieve the ROC curve for a binary model for the specified source.

Parameters

source [str] ROC curve data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values. (New in version v2.23) For time series and OTV models, also accepts values `backtest_2`, `backtest_3`, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

RocCurve Model ROC curve data

Raises

ClientError If the insight is not available for this model

(New in version v3.0) **TypeError** If the underlying project type is multilabel

get_rulesets () → List[datarobot.models.ruleset.RuleSet]

List the rulesets approximating this model generated by DataRobot Prime

If this model hasn't been approximated yet, will return an empty list. Note that these are rulesets approximating this model, not rulesets used to construct this model.

Returns

rulesets [list of RuleSet]

get_supported_capabilities ()

Retrieves a summary of the capabilities supported by a model.

New in version v2.14.

Returns

supportsBlending: bool whether the model supports blending

supportsMonotonicConstraints: bool whether the model supports monotonic constraints

hasWordCloud: bool whether the model has word cloud data available

eligibleForPrime: bool whether the model is eligible for Prime

hasParameters: bool whether the model has parameters that can be retrieved

supportsCodeGeneration: bool (New in version v2.18) whether the model supports code generation

supportsShap: bool

(New in version v2.18) **True if the model supports Shapley package. i.e. Shapley based feature Importance**

supportsEarlyStopping: bool (New in version v2.22) *True* if this is an early stopping tree-based model and number of trained iterations can be retrieved.

get_uri () → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

get_word_cloud (*exclude_stop_words=False*)

Retrieve word cloud data for the model.

Parameters

exclude_stop_words [bool, optional] Set to True if you want stopwords filtered out of response.

Returns

WordCloud Word cloud data for the model.

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

open_model_browser () → None

Opens model at project leaderboard in web browser. Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

request_approximation ()

Request an approximation of this model using DataRobot Prime

This will create several rulesets that could be used to approximate this model. After comparing their scores and rule counts, the code used in the approximation can be downloaded and run locally.

Returns

job [Job] the job generating the rulesets

request_cross_class_accuracy_scores ()

Request data disparity insights to be computed for the model.

Returns

status_id [str] A statusId of computation request.

request_data_disparity_insights (*feature, compared_class_names*)

Request data disparity insights to be computed for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

compared_class_names [list(str)] List of two classes to compare

Returns

status_id [str] A statusId of computation request.

request_external_test (*dataset_id: str, actual_value_column: Optional[str] = None*)

Request external test to compute scores and insights on an external test dataset

Parameters

dataset_id [string] The dataset to make predictions against (as uploaded from Project.upload_dataset)

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the `forecast_point` parameter.

Returns

•••

job [Job] a Job representing external dataset insights computation

request_fairness_insights (*fairness_metrics_set=None*)

Request fairness insights to be computed for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>. The fairness metric used to calculate the fairness scores.

Returns

status_id [str] A statusId of computation request.

request_frozen_datetime_model (*training_row_count: Optional[int] = None, training_duration: Optional[str] = None, training_start_date: Optional[datetime] = None, training_end_date: Optional[datetime] = None, time_window_sample_pct: Optional[int] = None, sampling_method: Optional[str] = None*) → ModelJob

Train a new frozen model with parameters from this model.

Requires that this model belongs to a datetime partitioned project. If it does not, an error will occur when submitting the job.

Frozen models use the same tuning parameters as their parent model instead of independently optimizing them to allow efficiently retraining models on larger amounts of the training data.

In addition of `training_row_count` and `training_duration`, frozen datetime models may be trained on an exact date range. Only one of `training_row_count`, `training_duration`, or `training_start_date` and `training_end_date` should be specified.

Models specified using `training_start_date` and `training_end_date` are the only ones that can be trained into the holdout data (once the holdout is unlocked).

All durations should be specified with a duration string such as those returned by the [partitioning_methods.construct_duration_string](#) helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, `training_duration` may not be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, `training_row_count` may not be specified.

training_start_date [datetime.datetime, optional] the start date of the data to train to model on. Only rows occurring at or after this datetime will be used. If `training_start_date` is specified, `training_end_date` must also be specified.

training_end_date [datetime.datetime, optional] the end date of the data to train the model on. Only rows occurring strictly before this datetime will be used. If `training_end_date` is specified, `training_start_date` must also be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. duration or start and end dates). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from back-test (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

Returns

model_job [ModelJob] the modeling job training a frozen model

request_predictions (*dataset_id*: Optional[str] = None, *dataset*: Optional[Dataset] = None, *dataframe*: Optional[pd.DataFrame] = None, *file_path*: Optional[str] = None, *file*: Optional[IOBase] = None, *include_prediction_intervals*: Optional[bool] = None, *prediction_intervals_size*: Optional[int] = None, *forecast_point*: Optional[datetime] = None, *predictions_start_date*: Optional[datetime] = None, *predictions_end_date*: Optional[datetime] = None, *actual_value_column*: Optional[str] = None, *explanation_algorithm*: Optional[str] = None, *max_explanations*: Optional[int] = None, *max_ngram_explanations*: Optional[Union[int, str]] = None) → PredictionJob

Requests predictions against a previously uploaded dataset.

Parameters

dataset_id [string, optional] The ID of the dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataset [Dataset, optional] The dataset to make predictions against (as uploaded from `Project.upload_dataset`)

dataframe [pd.DataFrame, optional] (New in v3.0) The dataframe to make predictions against

file_path [str, optional] (New in v3.0) Path to file to make predictions against

file [IOBase, optional] (New in v3.0) File to make predictions against

include_prediction_intervals [bool, optional] (New in v2.16) For *time series* projects only. Specifies whether prediction intervals should be calculated for this request. Defaults to True if *prediction_intervals_size* is specified, otherwise defaults to False.

prediction_intervals_size [int, optional] (New in v2.16) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Defaults to 80 if *include_prediction_intervals* is True. Prediction intervals size must be between 1 and 100 (inclusive).

forecast_point [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series [prediction documentation](#) for more information.

predictions_start_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with `predictions_end_date`. Can't be provided with the `forecast_point` parameter.

predictions_end_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The end date for bulk predictions, exclusive. Note that this

parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with `predictions_start_date`. Can't be provided with the `forecast_point` parameter.

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the `forecast_point` parameter.

explanation_algorithm: (New in version v2.21) optional; If set to `shap`, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to null (no prediction explanations).

max_explanations: (New in version v2.21) int optional; specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. If null, no limit. In the case of `shap`: if the number of features is greater than the limit, the sum of remaining values will also be returned as `shapRemainingTotal`. Defaults to null. Cannot be set if `explanation_algorithm` is omitted.

max_ngram_explanations: optional; int or str (New in version v2.29) Specifies the maximum number of text explanation values that should be returned. If set to `all`, text explanations will be computed and all the ngram explanations will be returned. If set to a non zero positive integer value, text explanations will be computed and this amount of descendingly sorted ngram explanations will be returned. By default text explanation won't be triggered to be computed.

Returns

job [PredictJob] The job computing the predictions

request_transferable_export (*prediction_intervals_size: Optional[int] = None*) → Job

Request generation of an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

This function does not download the exported file. Use `download_export` for that.

Parameters

prediction_intervals_size [int, optional] (New in v2.19) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Prediction intervals size must be between 1 and 100 (inclusive).

Returns

Job

Examples

```
model = datarobot.Model.get('project-id', 'model-id')
job = model.request_transferable_export()
job.wait_for_completion()
model.download_export('my_exported_model.drmodel')

# Client must be configured to use standalone prediction server for import:
datarobot.Client(token='my-token-at-standalone-server',
                 endpoint='standalone-server-url/api/v2')
```

(continues on next page)

(continued from previous page)

```
imported_model = datarobot.ImportedModel.create('my_exported_model.drmodel')
```

set_prediction_threshold (*threshold*)

Set a custom prediction threshold for the model.

May not be used once `prediction_threshold_read_only` is `True` for this model.

Parameters

threshold [float] only used for binary classification projects. The threshold to when deciding between the positive and negative classes when making predictions. Should be between 0.0 and 1.0 (inclusive).

star_model () → None

Mark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

start_advanced_tuning_session ()

Start an Advanced Tuning session. Returns an object that helps set up arguments for an Advanced Tuning model execution.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

AdvancedTuningSession Session for setting up and running Advanced Tuning on a model

train_datetime (*featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, training_duration: Optional[str] = None, time_window_sample_pct: Optional[int] = None, monotonic_increasing_featurelist_id: Optional[Union[str, object]] = <object object>, monotonic_decreasing_featurelist_id: Optional[Union[str, object]] = <object object>, use_project_settings: bool = False, sampling_method: Optional[str] = None, n_clusters: Optional[int] = None*) → ModelJob

Trains this model on a different featurelist or sample size.

Requires that this model is part of a datetime partitioned project; otherwise, an error will occur.

All durations should be specified with a duration string such as those returned by the [partitioning_methods.construct_duration_string](#) helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

featurelist_id [str, optional] the featurelist to use to train the model. If not specified, the featurelist of this model is used.

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, neither `training_duration` nor `use_project_settings` may be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, neither `training_row_count` nor `use_project_settings` may be specified.

use_project_settings [bool, optional] (New in version v2.20) defaults to `False`. If `True`, indicates that the custom backtest partitioning settings specified by the user will be used to train the model and evaluate backtest scores. If specified, neither `training_row_count` nor `training_duration` may be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. duration or start and end dates). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from backtest (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

monotonic_increasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

n_clusters: int, optional (New in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that don't automatically determine the number of clusters.

Returns

job [ModelJob] the created job to build the model

unstar_model () → None

Unmark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

Frozen Model

```
class datarobot.models.FrozenModel (id=None, processes=None, featurelist_name=None, featurelist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, model_type=None, model_category=None, is_frozen=None, blueprint_id=None, metrics=None, parent_model_id=None, monotonic_increasing_featurelist_id=None, monotonic_decreasing_featurelist_id=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, model_number=None, supports_composable_ml=None)
```

Represents a model tuned with parameters which are derived from another model

All durations are specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Attributes

- id** [str] the id of the model
- project_id** [str] the id of the project the model belongs to
- processes** [list of str] the processes used by the model
- featurelist_name** [str] the name of the featurelist used by the model
- featurelist_id** [str] the id of the featurelist used by the model
- sample_pct** [float] the percentage of the project dataset used in training the model
- training_row_count** [int or None] the number of rows of the project dataset used in training the model. In a datetime partitioned project, if specified, defines the number of rows used to train the model and evaluate backtest scores; if unspecified, either `training_duration` or `training_start_date` and `training_end_date` was used to determine that instead.
- training_duration** [str or None] only present for models in datetime partitioned projects. If specified, a duration string specifying the duration spanned by the data used to train the model and evaluate backtest scores.
- training_start_date** [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the start date of the data used to train the model.
- training_end_date** [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the end date of the data used to train the model.
- model_type** [str] what model this is, e.g. "Nystroem Kernel SVM Regressor"
- model_category** [str] what kind of model this is - "prime" for DataRobot Prime models, "blend" for blender models, and "model" for other models
- is_frozen** [bool] whether this model is a frozen model
- parent_model_id** [str] the id of the model that tuning parameters are derived from
- blueprint_id** [str] the id of the blueprint used in this model
- metrics** [dict] a mapping from each metric to the model's scores for that metric
- monotonic_increasing_featurelist_id** [str] optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced.
- monotonic_decreasing_featurelist_id** [str] optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. If None, no such constraints are enforced.
- supports_monotonic_constraints** [bool] optional, whether this model supports enforcing monotonic constraints
- is_starred** [bool] whether this model marked as starred
- prediction_threshold** [float] for binary classification projects, the threshold used for predictions
- prediction_threshold_read_only** [bool] indicated whether modification of the prediction threshold is forbidden. Threshold modification is forbidden once a model has had a deployment created or predictions made via the dedicated prediction API.

model_number [integer] model number assigned to a model

supports_composable_ml [bool or None] (New in version v2.26) whether this model is supported in the Composable ML.

classmethod **get** (*project_id, model_id*)
Retrieve a specific frozen model.

Parameters

project_id [str] The project's id.

model_id [str] The `model_id` of the leaderboard item to retrieve.

Returns

model [FrozenModel] The queried instance.

Imported Model

Note: Imported Models are used in Stand Alone Scoring Engines. If you are not an administrator of such an engine, they are not relevant to you.

```
class datarobot.models.ImportedModel (id: str, imported_at: Optional[datetime.datetime]  
= None, model_id: Optional[str] = None, target: Optional[str] = None, featurelist_name: Optional[str] = None, dataset_name: Optional[str] = None, model_name: Optional[str] = None, project_id: Optional[str] = None, note: Optional[str] = None, origin_url: Optional[str] = None, imported_by_username: Optional[str] = None, project_name: Optional[str] = None, created_by_username: Optional[str] = None, created_by_id: Optional[str] = None, imported_by_id: Optional[str] = None, display_name: Optional[str] = None)
```

Represents an imported model available for making predictions. These are only relevant for administrators of on-premise Stand Alone Scoring Engines.

ImportedModels are trained in one DataRobot application, exported as a `.drmodel` file, and then imported for use in a Stand Alone Scoring Engine.

Attributes

id [str] id of the import

model_name [str] model type describing the model generated by DataRobot

display_name [str] manually specified human-readable name of the imported model

note [str] manually added note about this imported model

imported_at [datetime] the time the model was imported

imported_by_username [str] username of the user who imported the model

imported_by_id [str] id of the user who imported the model

origin_url [str] URL of the application the model was exported from

model_id [str] original id of the model prior to export

featurelist_name [str] name of the featurelist used to train the model
project_id [str] id of the project the model belonged to prior to export
project_name [str] name of the project the model belonged to prior to export
target [str] the target of the project the model belonged to prior to export
dataset_name [str] filename of the dataset used to create the project the model belonged to
created_by_username [str] username of the user who created the model prior to export
created_by_id [str] id of the user who created the model prior to export

classmethod create (*path: str, max_wait: int = 600*) →
 datarobot.models.imported_model.ImportedModel
 Import a previously exported model for predictions.

Parameters

path [str] The path to the exported model file
max_wait [int, optional] Time in seconds after which model import is considered unsuccessful

classmethod get (*import_id: str*) → datarobot.models.imported_model.ImportedModel
 Retrieve imported model info

Parameters

import_id [str] The ID of the imported model.

Returns

imported_model [ImportedModel] The ImportedModel instance

classmethod list (*limit: Optional[int] = None, offset: Optional[int] = None*) →
 List[datarobot.models.imported_model.ImportedModel]
 List the imported models.

Parameters

limit [int] The number of records to return. The server will use a (possibly finite) default if not specified.
offset [int] The number of records to skip.

Returns

imported_models [list[ImportedModel]]

update (*display_name: Optional[str] = None, note: Optional[str] = None*) → None
 Update the display name or note for an imported model. The ImportedModel object is updated in place.

Parameters

display_name [str] The new display name.
note [str] The new note.

delete () → None
 Delete this imported model.

RatingTableModel

```
class datarobot.models.RatingTableModel (id=None, processes=None, featurelist_name=None, featurelist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, model_type=None, model_category=None, is_frozen=None, blueprint_id=None, metrics=None, rating_table_id=None, monotonic_increasing_featurelist_id=None, monotonic_decreasing_featurelist_id=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, model_number=None, supports_composable_ml=None)
```

A model that has a rating table.

All durations are specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Attributes

id [str] the id of the model

project_id [str] the id of the project the model belongs to

processes [list of str] the processes used by the model

featurelist_name [str] the name of the featurelist used by the model

featurelist_id [str] the id of the featurelist used by the model

sample_pct [float or None] the percentage of the project dataset used in training the model. If the project uses datetime partitioning, the `sample_pct` will be None. See `training_row_count`, `training_duration`, and `training_start_date` and `training_end_date` instead.

training_row_count [int or None] the number of rows of the project dataset used in training the model. In a datetime partitioned project, if specified, defines the number of rows used to train the model and evaluate backtest scores; if unspecified, either `training_duration` or `training_start_date` and `training_end_date` was used to determine that instead.

training_duration [str or None] only present for models in datetime partitioned projects. If specified, a duration string specifying the duration spanned by the data used to train the model and evaluate backtest scores.

training_start_date [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the start date of the data used to train the model.

training_end_date [datetime or None] only present for frozen models in datetime partitioned projects. If specified, the end date of the data used to train the model.

model_type [str] what model this is, e.g. "Nystroem Kernel SVM Regressor"

model_category [str] what kind of model this is - "prime" for DataRobot Prime models, "blend" for blender models, and "model" for other models

is_frozen [bool] whether this model is a frozen model

blueprint_id [str] the id of the blueprint used in this model

metrics [dict] a mapping from each metric to the model's scores for that metric

rating_table_id [str] the id of the rating table that belongs to this model

monotonic_increasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced.

monotonic_decreasing_featurelist_id [str] optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. If None, no such constraints are enforced.

supports_monotonic_constraints [bool] optional, whether this model supports enforcing monotonic constraints

is_starred [bool] whether this model marked as starred

prediction_threshold [float] for binary classification projects, the threshold used for predictions

prediction_threshold_read_only [bool] indicated whether modification of the prediction threshold is forbidden. Threshold modification is forbidden once a model has had a deployment created or predictions made via the dedicated prediction API.

model_number [integer] model number assigned to a model

supports_composable_ml [bool or None] (New in version v2.26) whether this model is supported in the Composable ML.

classmethod **get** (*project_id*, *model_id*)

Retrieve a specific rating table model

If the project does not have a rating table, a ClientError will occur.

Parameters

project_id [str] the id of the project the model belongs to

model_id [str] the id of the model to retrieve

Returns

model [RatingTableModel] the model

classmethod **create_from_rating_table** (*project_id*: str, *rating_table_id*: str) → Job

Creates a new model from a validated rating table record. The RatingTable must not be associated with an existing model.

Parameters

project_id [str] the id of the project the rating table belongs to

rating_table_id [str] the id of the rating table to create this model from

Returns

job: Job an instance of created async job

Raises

ClientError (422) Raised if creating model from a RatingTable that failed validation

JobAlreadyRequested Raised if creating model from a RatingTable that is already associated with a RatingTableModel

advanced_tune (*params*, *description: Optional[str] = None*) → `ModelJob`

Generate a new model with the specified advanced-tuning parameters

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Parameters

params [dict] Mapping of parameter ID to parameter value. The list of valid parameter IDs for a model can be found by calling `get_advanced_tuning_parameters()`. This endpoint does not need to include values for all parameters. If a parameter is omitted, its `current_value` will be used.

description [str] Human-readable string describing the newly advanced-tuned model

Returns

ModelJob The created job to build the model

cross_validate ()

Run cross validation on the model.

Note: To perform Cross Validation on a new model with new parameters, use `train` instead.

Returns

ModelJob The created job to build the model

delete () → None

Delete a model from the project's leaderboard.

download_export (*filepath: str*) → None

Download an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

Parameters

filepath [str] The path at which to save the exported model file.

download_scoring_code (*file_name*, *source_code=False*)

Download the Scoring Code JAR.

Parameters

file_name [str] File path where scoring code will be saved.

source_code [bool, optional] Set to True to download source code archive. It will not be executable.

download_training_artifact (*file_name*)

Retrieve trained artifact(s) from a model containing one or more custom tasks.

Artifact(s) will be downloaded to the specified local filepath.

Parameters

file_name [str] File path where trained model artifact(s) will be saved.

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

get_advanced_tuning_parameters () → AdvancedTuningParamsType

Get the advanced-tuning parameters available for this model.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

dict A dictionary describing the advanced-tuning parameters for the current model. There are two top-level keys, *tuning_description* and *tuning_parameters*.

tuning_description an optional value. If not *None*, then it indicates the user-specified description of this set of tuning parameter.

tuning_parameters is a list of a dicts, each has the following keys

- **parameter_name** : (**str**) name of the parameter (unique per task, see below)
- **parameter_id** : (**str**) opaque ID string uniquely identifying parameter
- **default_value** : (*) the actual value used to train the model; either the single value of the parameter specified before training, or the best value from the list of grid-searched values (based on *current_value*)
- **current_value** : (*) the single value or list of values of the parameter that were grid searched. Depending on the grid search specification, could be a single fixed value (no grid search), a list of discrete values, or a range.
- **task_name** : (**str**) name of the task that this parameter belongs to
- **constraints**: (**dict**) see the notes below
- **vertex_id**: (**str**) ID of vertex that this parameter belongs to

Notes

The type of *default_value* and *current_value* is defined by the *constraints* structure. It will be a string or numeric Python type.

constraints is a dict with *at least one*, possibly more, of the following keys. The presence of a key indicates that the parameter may take on the specified type. (If a key is absent, this means that the parameter may not take on the specified type.) If a key on *constraints* is present, its value will be a dict containing all of the fields described below for that key.

```

"constraints": {
  "select": {
    "values": [<list (basestring or number) : possible values>]
  },
  "ascii": {},
  "unicode": {},
  "int": {
    "min": <int : minimum valid value>,
    "max": <int : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                               requested for this param>
  },
  "float": {

```

(continues on next page)

(continued from previous page)

```

    "min": <float : minimum valid value>,
    "max": <float : maximum valid value>,
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  },
  "intList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <int : minimum valid value>,
    "max_val": <int : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  },
  "floatList": {
    "min_length": <int : minimum valid length>,
    "max_length": <int : maximum valid length>
    "min_val": <float : minimum valid value>,
    "max_val": <float : maximum valid value>
    "supports_grid_search": <bool : True if Grid Search may be
                             requested for this param>
  }
}

```

The keys have meaning as follows:

- *select*: Rather than specifying a specific data type, if present, it indicates that the parameter is permitted to take on any of the specified values. Listed values may be of any string or real (non-complex) numeric type.
- *ascii*: The parameter may be a *unicode* object that encodes simple ASCII characters. (A-Z, a-z, 0-9, whitespace, and certain common symbols.) In addition to listed constraints, ASCII keys currently may not contain either newlines or semicolons.
- *unicode*: The parameter may be any Python *unicode* object.
- *int*: The value may be an object of type *int* within the specified range (inclusive). Please note that the value will be passed around using the JSON format, and some JSON parsers have undefined behavior with integers outside of the range $[-(2^{53})+1, (2^{53})-1]$.
- *float*: The value may be an object of type *float* within the specified range (inclusive).
- *intList*, *floatList*: The value may be a list of *int* or *float* objects, respectively, following constraints as specified respectively by the *int* and *float* types (above).

Many parameters only specify one key under *constraints*. If a parameter specifies multiple keys, the parameter may take on any value permitted by any key.

get_all_confusion_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all confusion matrices available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent for any source that is not available for this model and if this has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ConfusionChart Data for all available confusion charts for model.

get_all_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_multiclass_lift_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of LiftChart Data for all available model lift charts.

Raises

ClientError If the insight is not available for this model

get_all_residuals_charts (*fallback_to_parent_insights=False*)

Retrieve a list of all Lift charts available for the model.

Parameters

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of ResidualsChart Data for all available model residuals charts.

get_all_roc_curves (*fallback_to_parent_insights=False*)

Retrieve a list of all ROC curves available for the model.

Parameters

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent for any source that is not available for this model and if this model has a defined parent model. If omitted or False, or this model has no parent, this will not attempt to retrieve any data from this model's parent.

Returns

list of RocCurve Data for all available model ROC curves.

get_confusion_chart (*source, fallback_to_parent_insights=False*)

Retrieve them model's confusion matrix for the specified source.

Parameters

source [str] Confusion chart source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return confusion chart data for this model's parent if the confusion chart is not available for this model and the defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

ConfusionChart Model ConfusionChart data

Raises

ClientError If the insight is not available for this model

get_cross_class_accuracy_scores ()

Retrieves a list of Cross Class Accuracy scores for the model.

Returns

json

get_cross_validation_scores (*partition=None, metric=None*)

Return a dictionary, keyed by metric, showing cross validation scores per partition.

Cross Validation should already have been performed using `cross_validate` or `train`.

Note: Models that computed cross validation before this feature was added will need to be deleted and retrained before this method can be used.

Parameters

partition [float] optional, the id of the partition (1,2,3,0,4,0,etc) to filter results by can be a whole number positive integer or float value. 0 corresponds to the validation partition.

metric: unicode optional name of the metric to filter to resulting cross validation scores by

Returns

cross_validation_scores: dict A dictionary keyed by metric showing cross validation scores per partition.

get_data_disparity_insights (*feature, class_name1, class_name2*)

Retrieve a list of Cross Class Data Disparity insights for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

class_name1 [str] One of the compared classes

class_name2 [str] Another compared class

Returns

json

get_fairness_insights (*fairness_metrics_set=None, offset=0, limit=100*)

Retrieve a list of Per Class Bias insights for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of <datarobot.enums.FairnessMetricsSet>. The fairness metric used to calculate the fairness scores.

offset [int, optional] Number of items to skip.

limit [int, optional] Number of items to return.

Returns

json

get_feature_effect (*source: str*)

Retrieve Feature Effects for the model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with *request_feature_effect*.

See *get_feature_effect_metadata* for retrieving information the available sources.

Parameters

source [string] The source Feature Effects are retrieved for.

Returns

feature_effects [FeatureEffects] The feature effects data.

Raises

ClientError (404) If the feature effects have not been computed or source is not valid value.

get_feature_effect_metadata ()

Retrieve Feature Effects metadata. Response contains status and available model sources.

- Feature Fit for the *training* partition is always available, with the exception of older projects that only supported Feature Fit for *validation*.
- When a model is trained into *validation* or *holdout* without stacked predictions (i.e., no out-of-sample predictions in those partitions), Feature Effects is not available for *validation* or *holdout*.
- Feature Effects for *holdout* is not available when holdout was not unlocked for the project.

Use *source* to retrieve Feature Effects, selecting one of the provided sources.

Returns

feature_effect_metadata: FeatureEffectMetadata

get_feature_effects_multiclass (*source: str = 'training', class_: Optional[str] = None*)

Retrieve Feature Effects for the multiclass model.

Feature Effects provide partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with *request_feature_effect*.

See *get_feature_effect_metadata* for retrieving information the available sources.

Parameters

source [str] The source Feature Effects are retrieved for.

class_ [str or None] The class name Feature Effects are retrieved for.

Returns

list The list of multiclass feature effects.

Raises

ClientError (404) If Feature Effects have not been computed or source is not valid value.

get_feature_fit (*source: str*)

Retrieve Feature Fit for the model.

Feature Fit provides partial dependence and predicted vs actual values for top-500 features ordered by feature importance score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Fit has already been computed with `request_feature_effect`.

See `get_feature_fit_metadata` for retrieving information the available sources.

Parameters

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_fit [FeatureFit] The feature fit data.

Raises

ClientError (404) If the feature fit have not been computed or source is not valid value.

get_feature_fit_metadata ()

Retrieve Feature Fit metadata. Response contains status and available model sources.

- Feature Fit of *training* is always available (except for the old project which supports only Feature Fit for *validation*).
- When a model is trained into *validation* or *holdout* without stacked prediction (e.g. no out-of-sample prediction in *validation* or *holdout*), Feature Fit is not available for *validation* or *holdout*.
- Feature Fit for *holdout* is not available when there is no holdout configured for the project.

source is expected parameter to retrieve Feature Fit. One of provided sources shall be used.

Returns

feature_effect_metadata: FeatureFitMetadata

get_feature_impact (*with_metadata: bool = False*)

Retrieve the computed Feature Impact results, a measure of the relevance of each feature in the model.

Feature Impact is computed for each column by creating new data with that column randomly permuted (but the others left unchanged), and seeing how the error metric score for the predictions is affected. The `impact_unnormalized` is how much worse the error metric score is when making predictions on

this modified data. The `impactNormalized` is normalized so that the largest value is 1. In both cases, larger values indicate more important features.

If a feature is a redundant feature, i.e. once other features are considered it doesn't contribute much in addition, the `redundantWith` value is the name of feature that has the highest correlation with this feature. Note that redundancy detection is only available for jobs run after the addition of this feature. When retrieving data that predates this functionality, a `NoRedundancyImpactAvailable` warning will be used.

Elsewhere this technique is sometimes called `Permutation Importance`.

Requires that Feature Impact has already been computed with `request_feature_impact`.

Parameters

with_metadata [bool] The flag indicating if the result should include the metadata as well.

Returns

list or dict The feature impact data response depends on the `with_metadata` parameter. The response is either a dict with metadata and a list with actual data or just a list with that data.

Each List item is a dict with the keys `featureName`, `impactNormalized`, and `impactUnnormalized`, `redundantWith` and `count`.

For dict response available keys are:

- **featureImpacts - Feature Impact data as a dictionary. Each item is a dict with keys:** `featureName`, `impactNormalized`, and `impactUnnormalized`, and `redundantWith`.
- **shapBased - A boolean that indicates whether Feature Impact was calculated using** Shapley values.
- **ranRedundancyDetection - A boolean that indicates whether redundant feature** identification was run while calculating this Feature Impact.
- **rowCount - An integer or None that indicates the number of rows that was used to** calculate Feature Impact. For the Feature Impact calculated with the default logic, without specifying the `rowCount`, we return `None` here.
- **count - An integer with the number of features under the** `featureImpacts`.

Raises

ClientError (404) If the feature impacts have not been computed.

`get_features_used()` → List[str]

Query the server to determine which features were used.

Note that the data returned by this method is possibly different than the names of the features in the `featurelist` used by this model. This method will return the raw features that must be supplied in order for predictions to be generated on a new set of data. The `featurelist`, in contrast, would also include the names of derived features.

Returns

features [list of str] The names of the features used in the model.

`get_frozen_child_models()`

Retrieve the IDs for all models that are frozen from this model.

Returns

A list of Models

get_labelwise_roc_curves (*source*, *fallback_to_parent_insights=False*)

Retrieve a list of LabelwiseRocCurve instances for a multilabel model the given source and all labels.

New in version v2.24.

Parameters

source [str] ROC curve data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

list of [class:LabelwiseRocCurve <datarobot.models.roc_curve.LabelwiseRocCurve>] Labelwise ROC Curve instances for *source* and all labels

Raises

ClientError If the insight is not available for this model

(New in version v3.0) TypeError If the underlying project type is binary

get_leaderboard_ui_permalink () → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

get_lift_chart (*source*, *fallback_to_parent_insights=False*)

Retrieve the model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check datarobot.enums.CHART_DATA_SOURCE for possible values. (New in version v2.23) For time series and OTV models, also accepts values *backtest_2*, *backtest_3*, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

LiftChart Model lift chart data

Raises

ClientError If the insight is not available for this model

get_missing_report_info ()

Retrieve a report on missing training data that can be used to understand missing values treatment in the model. The report consists of missing values resolutions for features numeric or categorical features that were part of building the model.

Returns

An iterable of MissingReportPerFeature The queried model missing report, sorted by missing count (DESCENDING order).

get_model_blueprint_chart ()

Retrieve a diagram that can be used to understand data flow in the blueprint.

Returns

ModelBlueprintChart The queried model blueprint chart.

get_model_blueprint_documents ()

Get documentation for tasks used in this model.

Returns

list of BlueprintTaskDocument All documents available for the model.

get_multiclass_feature_impact ()

For multiclass it's possible to calculate feature impact separately for each target class. The method for calculation is exactly the same, calculated in one-vs-all style for each target class.

Requires that Feature Impact has already been computed with *request_feature_impact*.

Returns

feature_impacts [list of dict] The feature impact data. Each item is a dict with the keys *featureImpacts* (list), *class* (str). Each item in *featureImpacts* is a dict with the keys *featureName*, *impactNormalized*, and *impactUnnormalized*, and *redundantWith*.

Raises

ClientError (404) If the multiclass feature impacts have not been computed.

get_multiclass_lift_chart (*source, fallback_to_parent_insights=False*)

Retrieve model Lift chart for the specified source.

Parameters

source [str] Lift chart data source. Check *datarobot.enums.CHART_DATA_SOURCE* for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_multilabel_lift_charts (*source, fallback_to_parent_insights=False*)

Retrieve model Lift charts for the specified source.

New in version v2.24.

Parameters

source [str] Lift chart data source. Check *datarobot.enums.CHART_DATA_SOURCE* for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return lift chart data for this model's parent if the lift chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return insight data from this model's parent.

Returns

list of LiftChart Model lift chart data for each saved target class

Raises

ClientError If the insight is not available for this model

get_num_iterations_trained()

Retrieves the number of estimators trained by early-stopping tree-based models.

– versionadded:: v2.22

Returns

projectId: str id of project containing the model

modelId: str id of the model

data: array list of *numEstimatorsItem* objects, one for each modeling stage.

numEstimatorsItem will be of the form:

stage: str indicates the modeling stage (for multi-stage models); None of single-stage models

numIterations: int the number of estimators or iterations trained by the model

get_or_request_feature_effect (*source: str, max_wait: int = 600, row_count: Optional[int] = None*)

Retrieve feature effect for the model, requesting a job if it hasn't been run previously

See [get_feature_effect_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature effect job to complete before erroring

row_count [int, optional] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

source [string] The source Feature Effects are retrieved for.

Returns

feature_effects [FeatureEffects] The feature effects data.

get_or_request_feature_effects_multiclass (*source, top_n_features=None, features=None, row_count=None, class_=None, max_wait=600*)

Retrieve Feature Effects for the multiclass model, requesting a job if it hasn't been run previously.

Parameters

source [string] The source Feature Effects retrieve for.

class_ [str or None] The class name Feature Effects retrieve for.

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by Feature Impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

max_wait [int, optional] The maximum time to wait for a requested Feature Effects job to complete before erroring.

Returns

feature_effects [list of FeatureEffectsMulticlass] The list of multiclass feature effects data.

get_or_request_feature_fit (*source: str, max_wait: int = 600*)

Retrieve feature fit for the model, requesting a job if it hasn't been run previously

See [get_feature_fit_metadata](#) for retrieving information of source.

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature fit job to complete before erroring

source [string] The source Feature Fit are retrieved for. One value of [FeatureFitMetadata.sources].

Returns

feature_effects [FeatureFit] The feature fit data.

get_or_request_feature_impact (*max_wait: int = 600, **kwargs*)

Retrieve feature impact for the model, requesting a job if it hasn't been run previously

Parameters

max_wait [int, optional] The maximum time to wait for a requested feature impact job to complete before erroring

****kwargs** Arbitrary keyword arguments passed to [request_feature_impact](#).

Returns

feature_impacts [list or dict] The feature impact data. See [get_feature_impact](#) for the exact schema.

get_parameters ()

Retrieve model parameters.

Returns

ModelParameters Model parameters for this model.

get_pareto_front ()

Retrieve the Pareto Front for a Eureqa model.

This method is only supported for Eureqa models.

Returns

ParetoFront Model ParetoFront data

get_prime_eligibility ()

Check if this model can be approximated with DataRobot Prime

Returns

prime_eligibility [dict] a dict indicating whether a model can be approximated with DataRobot Prime (key *can_make_prime*) and why it may be ineligible (key *message*)

get_residuals_chart (*source, fallback_to_parent_insights=False*)

Retrieve model residuals chart for the specified source.

Parameters

source [str] Residuals chart data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values.

fallback_to_parent_insights [bool] Optional, if True, this will return residuals chart data for this model's parent if the residuals chart is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return residuals data from this model's parent.

Returns

ResidualsChart Model residuals chart data

Raises

ClientError If the insight is not available for this model

get_roc_curve (*source*, *fallback_to_parent_insights=False*)

Retrieve the ROC curve for a binary model for the specified source.

Parameters

source [str] ROC curve data source. Check `datarobot.enums.CHART_DATA_SOURCE` for possible values. (New in version v2.23) For time series and OTV models, also accepts values `backtest_2`, `backtest_3`, etc, up to the number of backtests in the model.

fallback_to_parent_insights [bool] (New in version v2.14) Optional, if True, this will return ROC curve data for this model's parent if the ROC curve is not available for this model and the model has a defined parent model. If omitted or False, or there is no parent model, will not attempt to return data from this model's parent.

Returns

RocCurve Model ROC curve data

Raises

ClientError If the insight is not available for this model

(New in version v3.0) TypeError If the underlying project type is multilabel

get_rulesets () → List[datarobot.models.ruleset.RuleSet]

List the rulesets approximating this model generated by DataRobot Prime

If this model hasn't been approximated yet, will return an empty list. Note that these are rulesets approximating this model, not rulesets used to construct this model.

Returns

rulesets [list of RuleSet]

get_supported_capabilities ()

Retrieves a summary of the capabilities supported by a model.

New in version v2.14.

Returns

supportsBlending: bool whether the model supports blending

supportsMonotonicConstraints: bool whether the model supports monotonic constraints

hasWordCloud: bool whether the model has word cloud data available

eligibleForPrime: bool whether the model is eligible for Prime

hasParameters: bool whether the model has parameters that can be retrieved

supportsCodeGeneration: bool (New in version v2.18) whether the model supports code generation

supportsShap: bool

(New in version v2.18) True if the model supports Shapley package. i.e. Shapley based feature Importance

supportsEarlyStopping: bool (New in version v2.22) True if this is an early stopping tree-based model and number of trained iterations can be retrieved.

get_uri () → str

Returns

url [str] Permanent static hyperlink to this model at leaderboard.

get_word_cloud (exclude_stop_words=False)

Retrieve word cloud data for the model.

Parameters

exclude_stop_words [bool, optional] Set to True if you want stopwords filtered out of response.

Returns

WordCloud Word cloud data for the model.

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

open_model_browser () → None

Opens model at project leaderboard in web browser. Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

request_approximation ()

Request an approximation of this model using DataRobot Prime

This will create several rulesets that could be used to approximate this model. After comparing their scores and rule counts, the code used in the approximation can be downloaded and run locally.

Returns

job [Job] the job generating the rulesets

request_cross_class_accuracy_scores ()

Request data disparity insights to be computed for the model.

Returns

status_id [str] A statusId of computation request.

request_data_disparity_insights (feature, compared_class_names)

Request data disparity insights to be computed for the model.

Parameters

feature [str] Bias and Fairness protected feature name.

compared_class_names [list(str)] List of two classes to compare

Returns

status_id [str] A statusId of computation request.

request_external_test (*dataset_id: str, actual_value_column: Optional[str] = None*)

Request external test to compute scores and insights on an external test dataset

Parameters

dataset_id [string] The dataset to make predictions against (as uploaded from `Project.upload_dataset`)

actual_value_column [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the `forecast_point` parameter.

Returns

•

job [Job] a Job representing external dataset insights computation

request_fairness_insights (*fairness_metrics_set=None*)

Request fairness insights to be computed for the model.

Parameters

fairness_metrics_set [str, optional] Can be one of `<datarobot.enums.FairnessMetricsSet>`. The fairness metric used to calculate the fairness scores.

Returns

status_id [str] A statusId of computation request.

request_feature_effect (*row_count: Optional[int] = None*)

Request feature effects to be computed for the model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] (New in version v2.21) The sample size to use for Feature Impact computation. Minimum is 10 rows. Maximum is 100000 rows or the training sample size of the model, whichever is less.

Returns

job [Job] A Job representing the feature effect computation. To get the completed feature effect data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

request_feature_effects_multiclass (*row_count: Optional[int] = None, top_n_features: Optional[int] = None, features=None*)

Request Feature Effects computation for the multiclass model.

See [get_feature_effect](#) for more information on the result of the job.

Parameters

row_count [int] The number of rows from dataset to use for Feature Impact calculation.

top_n_features [int or None] Number of top features (ranked by feature impact) used to calculate Feature Effects.

features [list or None] The list of features used to calculate Feature Effects.

Returns

job [Job] A Job representing Feature Effect computation. To get the completed Feature Effect data, use `job.get_result` or `job.get_result_when_complete`.

request_feature_fit ()

Request feature fit to be computed for the model.

See `get_feature_effect` for more information on the result of the job.

Returns

job [Job] A Job representing the feature fit computation. To get the completed feature fit data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature effect have already been requested.

request_feature_impact (*row_count: Optional[int] = None, with_metadata: bool = False*)

Request feature impacts to be computed for the model.

See `get_feature_impact` for more information on the result of the job.

Parameters

row_count [int] The sample size (specified in rows) to use for Feature Impact computation. This is not supported for unsupervised, multi-class (that has a separate method) and time series projects.

Returns

job [Job] A Job representing the feature impact computation. To get the completed feature impact data, use `job.get_result` or `job.get_result_when_complete`.

Raises

JobAlreadyRequested (422) If the feature impacts have already been requested.

request_frozen_datetime_model (*training_row_count: Optional[int] = None, training_duration: Optional[str] = None, training_start_date: Optional[datetime] = None, training_end_date: Optional[datetime] = None, time_window_sample_pct: Optional[int] = None, sampling_method: Optional[str] = None*) → ModelJob

Train a new frozen model with parameters from this model.

Requires that this model belongs to a datetime partitioned project. If it does not, an error will occur when submitting the job.

Frozen models use the same tuning parameters as their parent model instead of independently optimizing them to allow efficiently retraining models on larger amounts of the training data.

In addition of `training_row_count` and `training_duration`, frozen datetime models may be trained on an exact date range. Only one of `training_row_count`, `training_duration`, or `training_start_date` and `training_end_date` should be specified.

Models specified using `training_start_date` and `training_end_date` are the only ones that can be trained into the holdout data (once the holdout is unlocked).

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, `training_duration` may not be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, `training_row_count` may not be specified.

training_start_date [datetime.datetime, optional] the start date of the data to train to model on. Only rows occurring at or after this datetime will be used. If `training_start_date` is specified, `training_end_date` must also be specified.

training_end_date [datetime.datetime, optional] the end date of the data to train the model on. Only rows occurring strictly before this datetime will be used. If `training_end_date` is specified, `training_start_date` must also be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. `duration` or `start and end dates`). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from backtest (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

Returns

model_job [ModelJob] the modeling job training a frozen model

request_frozen_model (*sample_pct*: Optional[float] = None, *training_row_count*: Optional[int] = None) → ModelJob

Train a new frozen model with parameters from this model

Note: This method only works if project the model belongs to is *not* datetime partitioned. If it is, use `request_frozen_datetime_model` instead.

Frozen models use the same tuning parameters as their parent model instead of independently optimizing them to allow efficiently retraining models on larger amounts of the training data.

Parameters

sample_pct [float] optional, the percentage of the dataset to use with the model. If not provided, will use the value from this model.

training_row_count [int] (New in version v2.9) optional, the integer number of rows of the dataset to use with the model. Only one of `sample_pct` and `training_row_count` should be specified.

Returns

model_job [ModelJob] the modeling job training a frozen model

request_predictions (*dataset_id*: Optional[str] = None, *dataset*: Optional[Dataset] = None, *dataframe*: Optional[pd.DataFrame] = None, *file_path*: Optional[str] = None, *file*: Optional[IOBase] = None, *include_prediction_intervals*: Optional[bool] = None, *prediction_intervals_size*: Optional[int] = None, *forecast_point*: Optional[datetime] = None, *predictions_start_date*: Optional[datetime] = None, *predictions_end_date*: Optional[datetime] = None, *actual_value_column*: Optional[str] = None, *explanation_algorithm*: Optional[str] = None, *max_explanations*: Optional[int] = None, *max_ngram_explanations*: Optional[Union[int, str]] = None) → PredictionJob

Requests predictions against a previously uploaded dataset.

Parameters

- dataset_id** [string, optional] The ID of the dataset to make predictions against (as uploaded from Project.upload_dataset)
- dataset** [Dataset, optional] The dataset to make predictions against (as uploaded from Project.upload_dataset)
- dataframe** [pd.DataFrame, optional] (New in v3.0) The dataframe to make predictions against
- file_path** [str, optional] (New in v3.0) Path to file to make predictions against
- file** [IOBase, optional] (New in v3.0) File to make predictions against
- include_prediction_intervals** [bool, optional] (New in v2.16) For *time series* projects only. Specifies whether prediction intervals should be calculated for this request. Defaults to True if *prediction_intervals_size* is specified, otherwise defaults to False.
- prediction_intervals_size** [int, optional] (New in v2.16) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Defaults to 80 if *include_prediction_intervals* is True. Prediction intervals size must be between 1 and 100 (inclusive).
- forecast_point** [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series *prediction documentation* for more information.
- predictions_start_date** [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_end_date*. Can't be provided with the *forecast_point* parameter.
- predictions_end_date** [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_start_date*. Can't be provided with the *forecast_point* parameter.
- actual_value_column** [string, optional] (New in version v2.21) For time series unsupervised projects only. Actual value column can be used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the *forecast_point* parameter.
- explanation_algorithm**: (New in version v2.21) optional; If set to `'shap'`, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to null (no prediction explanations).

max_explanations: (New in version v2.21) **int optional; specifies the maximum number of** explanation values that should be returned for each row, ordered by absolute value, greatest to least. If null, no limit. In the case of *dr.enums.EXPLANATIONS_ALGORITHM.SHAP*: if the number of features is greater than the limit, the sum of remaining values will also be returned as *shapRemainingTotal*. Defaults to null. Cannot be set if *explanation_algorithm* is omitted.

max_ngram_explanations: **optional; int or str** (New in version v2.29) Specifies the maximum number of text explanation values that should be returned. If set to *all*, text explanations will be computed and all the ngram explanations will be returned. If set to a non zero positive integer value, text explanations will be computed and this amount of descendingly sorted ngram explanations will be returned. By default text explanation won't be triggered to be computed.

Returns

job [PredictJob] The job computing the predictions

request_training_predictions (*data_subset*, *explanation_algorithm=None*,
max_explanations=None)

Start a job to build training predictions

Parameters

data_subset [str] data set definition to build predictions on. Choices are:

- *dr.enums.DATA_SUBSET.ALL* or string *all* for all data available. Not valid for models in datetime partitioned projects
- *dr.enums.DATA_SUBSET.VALIDATION_AND_HOLDOUT* or string *validationAndHoldout* for all data except training set. Not valid for models in datetime partitioned projects
- *dr.enums.DATA_SUBSET.HOLDOUT* or string *holdout* for holdout data set only
- *dr.enums.DATA_SUBSET.ALL_BACKTESTS* or string *allBacktests* for downloading the predictions for all backtest validation folds. Requires the model to have successfully scored all backtests. Datetime partitioned projects only.

explanation_algorithm [dr.enums.EXPLANATIONS_ALGORITHM] (New in v2.21) Optional. If set to *dr.enums.EXPLANATIONS_ALGORITHM.SHAP*, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to *None* (no prediction explanations).

max_explanations [int] (New in v2.21) Optional. Specifies the maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. In the case of *dr.enums.EXPLANATIONS_ALGORITHM.SHAP*: If not set, explanations are returned for all features. If the number of features is greater than the *max_explanations*, the sum of remaining values will also be returned as *shap_remaining_total*. Max 100. Defaults to null for datasets narrower than 100 columns, defaults to 100 for datasets wider than 100 columns. Is ignored if *explanation_algorithm* is not set.

Returns

Job an instance of created async job

request_transferable_export (*prediction_intervals_size: Optional[int] = None*) → Job

Request generation of an exportable model file for use in an on-premise DataRobot standalone prediction environment.

This function can only be used if model export is enabled, and will only be useful if you have an on-premise environment in which to import it.

This function does not download the exported file. Use *download_export* for that.

Parameters

prediction_intervals_size [int, optional] (New in v2.19) For *time series* projects only. Represents the percentile to use for the size of the prediction intervals. Prediction intervals size must be between 1 and 100 (inclusive).

Returns**Job****Examples**

```
model = datarobot.Model.get('project-id', 'model-id')
job = model.request_transferable_export()
job.wait_for_completion()
model.download_export('my_exported_model.drmodel')

# Client must be configured to use standalone prediction server for import:
datarobot.Client(token='my-token-at-standalone-server',
                 endpoint='standalone-server-url/api/v2')

imported_model = datarobot.ImportedModel.create('my_exported_model.drmodel')
```

retrain (*sample_pct*: Optional[float] = None, *featurelist_id*: Optional[str] = None, *training_row_count*: Optional[int] = None, *n_clusters*: Optional[int] = None) → ModelJob
Submit a job to the queue to train a blender model.

Parameters

sample_pct: float, optional The sample size in percents (1 to 100) to use in training. If this parameter is used then *training_row_count* should not be given.

featurelist_id [str, optional] The featurelist id

training_row_count [int, optional] The number of rows used to train the model. If this parameter is used, then *sample_pct* should not be given.

n_clusters: int, optional (new in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that do not determine the number of clusters automatically.

Returns

job [ModelJob] The created job that is retraining the model

set_prediction_threshold (*threshold*)
Set a custom prediction threshold for the model.

May not be used once *prediction_threshold_read_only* is True for this model.

Parameters

threshold [float] only used for binary classification projects. The threshold to when deciding between the positive and negative classes when making predictions. Should be between 0.0 and 1.0 (inclusive).

star_model () → None

Mark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

start_advanced_tuning_session()

Start an Advanced Tuning session. Returns an object that helps set up arguments for an Advanced Tuning model execution.

As of v2.17, all models other than blenders, open source, prime, baseline and user-created support Advanced Tuning.

Returns

AdvancedTuningSession Session for setting up and running Advanced Tuning on a model

train (*sample_pct*: *Optional*[float] = None, *featurelist_id*: *Optional*[str] = None, *scoring_type*: *Optional*[str] = None, *training_row_count*: *Optional*[int] = None, *monotonic_increasing_featurelist_id*: *Union*[str, object, None] = <object object>, *monotonic_decreasing_featurelist_id*: *Union*[str, object, None] = <object object>) → str

Train the blueprint used in model on a particular featurelist or amount of data.

This method creates a new training job for worker and appends it to the end of the queue for this project. After the job has finished you can get the newly trained model by retrieving it from the project leaderboard, or by retrieving the result of the job.

Either *sample_pct* or *training_row_count* can be used to specify the amount of data to use, but not both. If neither are specified, a default of the maximum amount of data that can safely be used to train any blueprint without going into the validation data will be selected.

In smart-sampled projects, *sample_pct* and *training_row_count* are assumed to be in terms of rows of the minority class.

Note: For datetime partitioned projects, see *train_datetime* instead.

Parameters

sample_pct [float, optional] The amount of data to use for training, as a percentage of the project dataset from 0 to 100.

featurelist_id [str, optional] The identifier of the featurelist to use. If not defined, the featurelist of this model is used.

scoring_type [str, optional] Either *validation* or *crossValidation* (also *dr.SCORING_TYPE.validation* or *dr.SCORING_TYPE.cross_validation*). *validation* is available for every partitioning type, and indicates that the default model validation should be used for the project. If the project uses a form of cross-validation partitioning, *crossValidation* can also be used to indicate that all of the available training/validation combinations should be used to evaluate the model.

training_row_count [int, optional] The number of rows to use to train the requested model.

monotonic_increasing_featurelist_id [str] (new in version 2.11) optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing *None* disables increasing monotonicity constraint. Default (*dr.enums.MONOTONICITY_FEATURELIST_DEFAULT*) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str] (new in version 2.11) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing *None* disables decreasing monotonicity constraint. Default (*dr.enums.MONOTONICITY_FEATURELIST_DEFAULT*) is the one specified by the blueprint.

Returns

model_job_id [str] id of created job, can be used as parameter to `ModelJob.get` method or `wait_for_async_model_creation` function

Examples

```
project = Project.get('project-id')
model = Model.get('project-id', 'model-id')
model_job_id = model.train(training_row_count=project.max_train_rows)
```

train_datetime (*featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, training_duration: Optional[str] = None, time_window_sample_pct: Optional[int] = None, monotonic_increasing_featurelist_id: Optional[Union[str, object]] = <object object>, monotonic_decreasing_featurelist_id: Optional[Union[str, object]] = <object object>, use_project_settings: bool = False, sampling_method: Optional[str] = None, n_clusters: Optional[int] = None*) → `ModelJob`

Trains this model on a different featurelist or sample size.

Requires that this model is part of a datetime partitioned project; otherwise, an error will occur.

All durations should be specified with a duration string such as those returned by the [partitioning_methods.construct_duration_string](#) helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

featurelist_id [str, optional] the featurelist to use to train the model. If not specified, the featurelist of this model is used.

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, neither `training_duration` nor `use_project_settings` may be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, neither `training_row_count` nor `use_project_settings` may be specified.

use_project_settings [bool, optional] (New in version v2.20) defaults to `False`. If `True`, indicates that the custom backtest partitioning settings specified by the user will be used to train the model and evaluate backtest scores. If specified, neither `training_row_count` nor `training_duration` may be specified.

time_window_sample_pct [int, optional] may only be specified when the requested model is a time window (e.g. duration or start and end dates). An integer between 1 and 99 indicating the percentage to sample by within the window. The points kept are determined by a random uniform sample. If specified, `training_duration` must be specified otherwise, the number of rows used to train the model and evaluate backtest scores and an error will occur.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from backtest (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

monotonic_increasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically increasing rela-

relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

n_clusters: int, optional (New in version 2.27) number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that don't automatically determine the number of clusters.

Returns

job [ModelJob] the created job to build the model

unstar_model () → None

Unmark the model as starred.

Model stars propagate to the web application and the API, and can be used to filter when listing models.

Combined Model

See API reference for Combined Model in [Segmented Modeling API Reference](#)

Advanced Tuning

class `datarobot.models.advanced_tuning.AdvancedTuningSession` (*model: Model*)

A session enabling users to configure and run advanced tuning for a model.

Every model contains a set of one or more tasks. Every task contains a set of zero or more parameters. This class allows tuning the values of each parameter on each task of a model, before running that model.

This session is client-side only and is not persistent. Only the final model, constructed when `run` is called, is persisted on the DataRobot server.

Attributes

description [str] Description for the new advance-tuned model. Defaults to the same description as the base model.

get_task_names () → List[str]

Get the list of task names that are available for this model

Returns

list(str) List of task names

get_parameter_names (*task_name: str*) → List[str]

Get the list of parameter names available for a specific task

Returns

list(str) List of parameter names

set_parameter (*value: Union[int, float, str, List[str]], task_name: Optional[str] = None, parameter_name: Optional[str] = None, parameter_id: Optional[str] = None*) → None

Set the value of a parameter to be used

The caller must supply enough of the optional arguments to this function to uniquely identify the parameter that is being set. For example, a less-common parameter name such as `building_block_complementary_error_function` might only be used once (if at all) by a single task in a model. In which case it may be sufficient to simply specify `parameter_name`. But a more-common name such as `random_seed` might be used by several of the model's tasks, and it may be necessary to also specify `task_name` to clarify which task's random seed is to be set. This function only affects client-side state. It will not check that the new parameter value(s) are valid.

Parameters

- task_name** [str] Name of the task whose parameter needs to be set
- parameter_name** [str] Name of the parameter to set
- parameter_id** [str] ID of the parameter to set
- value** [int, float, list, or str] New value for the parameter, with legal values determined by the parameter being set

Raises

- NoParametersFoundException** if no matching parameters are found.
- NonUniqueParametersException** if multiple parameters matched the specified filtering criteria

get_parameters () → `AdvancedTuningParamsType`
Returns the set of parameters available to this model

The returned parameters have one additional key, `value`, reflecting any new values that have been set in this `AdvancedTuningSession`. When the session is run, `value` will be used, or if it is unset, `current_value`.

Returns

parameters [dict] `Parameters` dictionary, same as specified on `Model.get_advanced_tuning_params`.

An additional field is added per parameter to the `tuning_parameters` list in the dictionary:

value [int, float, list, or str] The current value of the parameter. *None* if none has been specified.

run () → `ModelJob`
Submit this model for Advanced Tuning.

Returns

`datarobot.models.modeljob.ModelJob` The created job to build the model

2.3.34 ModelJob

```
datarobot.models.modeljob.wait_for_async_model_creation(project_id: str,
                                                       model_job_id: str,
                                                       max_wait: int = 600)
                                                       → Model
```

Given a Project id and ModelJob id poll for status of process responsible for model creation until model is created.

Parameters

project_id [str] The identifier of the project

model_job_id [str] The identifier of the ModelJob

max_wait [int, optional] Time in seconds after which model creation is considered unsuccessful

Returns

model [Model] Newly created model

Raises

AsyncModelCreationError Raised if status of fetched ModelJob object is `error`

AsyncTimeoutError Model wasn't created in time, specified by `max_wait` parameter

class `datarobot.models.ModelJob` (*data*, *completed_resource_url*: *Optional[str] = None*)
Tracks asynchronous work being done within a project

Attributes

id [int] the id of the job

project_id [str] the id of the project the job belongs to

status [str] the status of the job - will be one of `datarobot.enums.QUEUE_STATUS`

job_type [str] what kind of work the job is doing - will be `'model'` for modeling jobs

is_blocked [bool] if true, the job is blocked (cannot be executed) until its dependencies are resolved

sample_pct [float] the percentage of the project's dataset used in this modeling job

model_type [str] the model this job builds (e.g. `'Nystroem Kernel SVM Regressor'`)

processes [list of str] the processes used by the model

featurelist_id [str] the id of the featurelist used in this modeling job

blueprint [Blueprint] the blueprint used in this modeling job

classmethod `from_job` (*job*: *Job*) → *ModelJob*
Transforms a generic Job into a ModelJob

Parameters

job: *Job* A generic job representing a ModelJob

Returns

model_job: *ModelJob* A fully populated ModelJob with all the details of the job

Raises

ValueError: If the generic Job was not a model job, e.g. `job_type != JOB_TYPE.MODEL`

classmethod `get` (*project_id*: *str*, *model_job_id*: *str*) → `datarobot.models.modeljob.ModelJob`
Fetches one ModelJob. If the job finished, raises PendingJobFinished exception.

Parameters

project_id [str] The identifier of the project the model belongs to

model_job_id [str] The identifier of the model_job

Returns

model_job [ModelJob] The pending ModelJob

Raises

PendingJobFinished If the job being queried already finished, and the server is re-routing to the finished model.

AsyncFailureError Querying this resource gave a status code other than 200 or 303

classmethod `get_model` (*project_id: str, model_job_id: str*) → Model
Fetches a finished model from the job used to create it.

Parameters

project_id [str] The identifier of the project the model belongs to

model_job_id [str] The identifier of the model_job

Returns

model [Model] The finished model

Raises

JobNotFinished If the job has not finished yet

AsyncFailureError Querying the model_job in question gave a status code other than 200 or 303

cancel ()

Cancel this job. If this job has not finished running, it will be removed and canceled.

get_result (*params=None*)

Parameters

params [dict or None] Query parameters to be added to request to get results.

For featureEffects and featureFit, source param is required to define source, otherwise the default is ‘training‘

Returns

result [object]

Return type depends on the job type:

- for model jobs, a Model is returned
- for predict jobs, a pandas.DataFrame (with predictions) is returned
- for featureImpact jobs, a list of dicts by default (see `with_metadata` parameter of the `FeatureImpactJob` class and its `get ()` method).
- for primeRulesets jobs, a list of Rulesets
- for primeModel jobs, a PrimeModel
- for primeDownloadValidation jobs, a PrimeFile
- for predictionExplanationInitialization jobs, a PredictionExplanationsInitialization
- for predictionExplanations jobs, a PredictionExplanations
- for featureEffects, a FeatureEffects
- for featureFit, a FeatureFit

Raises

JobNotFinished If the job is not finished, the result is not available.

AsyncProcessUnsuccessfulError If the job errored or was aborted

get_result_when_complete (*max_wait=600, params=None*)

Parameters

max_wait [int, optional] How long to wait for the job to finish.

params [dict, optional] Query parameters to be added to request.

Returns

result: object Return type is the same as would be returned by *Job.get_result*.

Raises

AsyncTimeoutError If the job does not finish in time

AsyncProcessUnsuccessfulError If the job errored or was aborted

refresh ()

Update this object with the latest job data from the server.

wait_for_completion (*max_wait: int = 600*) → None

Waits for job to complete.

Parameters

max_wait [int, optional] How long to wait for the job to finish.

2.3.35 Pareto Front

class `datarobot.models.pareto_front.ParetoFront` (*project_id, error_metric, hyperparameters, target_type, solutions*)

Pareto front data for a Eureqa model.

The pareto front reflects the tradeoffs between error and complexity for particular model. The solutions reflect possible Eureqa models that are different levels of complexity. By default, only one solution will have a corresponding model, but models can be created for each solution.

Attributes

project_id [str] the ID of the project the model belongs to

error_metric [str] Eureqa error-metric identifier used to compute error metrics for this search. Note that Eureqa error metrics do NOT correspond 1:1 with DataRobot error metrics – the available metrics are not the same, and are computed from a subset of the training data rather than from the validation data.

hyperparameters [dict] Hyperparameters used by this run of the Eureqa blueprint

target_type [str] Indicating what kind of modeling is being done in this project, either “Regression”, “Binary” (Binary classification), or “Multiclass” (Multiclass classification).

solutions [list(Solution)] Solutions that Eureqa has found to model this data. Some solutions will have greater accuracy. Others will have slightly less accuracy but will use simpler expressions.

classmethod from_server_data (*data, keep_attrs=None*)

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [list] List of the dotted namespace notations for attributes to keep within the object structure even if their values are None

```
class datarobot.models.pareto_front.Solution(eureqa_solution_id, complexity, error, expression, expression_annotated, best_model, project_id)
```

Eureqa Solution.

A solution represents a possible Eureqa model; however not all solutions have models associated with them. It must have a model created before it can be used to make predictions, etc.

Attributes

eureqa_solution_id: str ID of this Solution

complexity: int Complexity score for this solution. Complexity score is a function of the mathematical operators used in the current solution. The Complexity calculation can be tuned via model hyperparameters.

error: float or None Error for the current solution, as computed by Eureqa using the `error_metric` error metric. It will be None if model refitted existing solution.

expression: str Eureqa model equation string.

expression_annotated: str Eureqa model equation string with variable names tagged for easy identification.

best_model: bool True, if the model is determined to be the best

create_model()

Add this solution to the leaderboard, if it is not already present.

2.3.36 Partitioning

```
class datarobot.RandomCV(holdout_pct: int, reps: int, seed: int = 0)
```

A partition in which observations are randomly assigned to cross-validation groups and the holdout set.

Parameters

holdout_pct [int] the desired percentage of dataset to assign to holdout set

reps [int] number of cross validation folds to use

seed [int] a seed to use for randomization

```
class datarobot.StratifiedCV(holdout_pct: int, reps: int, seed: int = 0)
```

A partition in which observations are randomly assigned to cross-validation groups and the holdout set, preserving in each group the same ratio of positive to negative cases as in the original data.

Parameters

holdout_pct [int] the desired percentage of dataset to assign to holdout set

reps [int] number of cross validation folds to use

seed [int] a seed to use for randomization

```
class datarobot.GroupCV(holdout_pct: int, reps: int, partition_key_cols: List[str], seed: int = 0)
```

A partition in which one column is specified, and rows sharing a common value for that column are guaranteed to stay together in the partitioning into cross-validation groups and the holdout set.

Parameters

holdout_pct [int] the desired percentage of dataset to assign to holdout set

reps [int] number of cross validation folds to use

partition_key_cols [list] a list containing a single string, where the string is the name of the column whose values should remain together in partitioning

seed [int] a seed to use for randomization

class `datarobot.UserCV` (*user_partition_col: str, cv_holdout_level, seed: int = 0*)

A partition where the cross-validation folds and the holdout set are specified by the user.

Parameters

user_partition_col [string] the name of the column containing the partition assignments

cv_holdout_level the value of the partition column indicating a row is part of the holdout set

seed [int] a seed to use for randomization

class `datarobot.RandomTVH` (*holdout_pct: int, validation_pct: int, seed: int = 0*)

Specifies a partitioning method in which rows are randomly assigned to training, validation, and holdout.

Parameters

holdout_pct [int] the desired percentage of dataset to assign to holdout set

validation_pct [int] the desired percentage of dataset to assign to validation set

seed [int] a seed to use for randomization

class `datarobot.UserTVH` (*user_partition_col: str, training_level, validation_level, holdout_level, seed: int = 0*)

Specifies a partitioning method in which rows are assigned by the user to training, validation, and holdout sets.

Parameters

user_partition_col [string] the name of the column containing the partition assignments

training_level the value of the partition column indicating a row is part of the training set

validation_level the value of the partition column indicating a row is part of the validation set

holdout_level the value of the partition column indicating a row is part of the holdout set (use None if you want no holdout set)

seed [int] a seed to use for randomization

class `datarobot.StratifiedTVH` (*holdout_pct: int, validation_pct: int, seed: int = 0*)

A partition in which observations are randomly assigned to train, validation, and holdout sets, preserving in each group the same ratio of positive to negative cases as in the original data.

Parameters

holdout_pct [int] the desired percentage of dataset to assign to holdout set

validation_pct [int] the desired percentage of dataset to assign to validation set

seed [int] a seed to use for randomization

class `datarobot.GroupTVH` (*holdout_pct: int, validation_pct: int, partition_key_cols: List[str], seed: int = 0*)

A partition in which one column is specified, and rows sharing a common value for that column are guaranteed to stay together in the partitioning into the training, validation, and holdout sets.

Parameters

holdout_pct [int] the desired percentage of dataset to assign to holdout set

validation_pct [int] the desired percentage of dataset to assign to validation set

partition_key_cols [list] a list containing a single string, where the string is the name of the column whose values should remain together in partitioning

seed [int] a seed to use for randomization

```
class datarobot.DatetimePartitioningSpecification (datetime_partition_column: str,
autopilot_data_selection_method: Optional[str] = None,
validation_duration: Optional[str] = None,
holdout_start_date=None,
holdout_duration: Optional[str] = None,
disable_holdout: Optional[bool] = None,
gap_duration: Optional[str] = None,
number_of_backtests: Optional[int] = None,
backtests=None,
use_time_series: bool = False,
default_to_known_in_advance: bool = False,
default_to_do_not_derive: bool = False,
feature_derivation_window_start: Optional[int] = None,
feature_derivation_window_end: Optional[int] = None,
feature_settings=None,
forecast_window_start: Optional[int] = None,
forecast_window_end: Optional[int] = None,
windows_basis_unit: Optional[str] = None,
treat_as_exponential: Optional[str] = None,
differencing_method: Optional[str] = None,
periodicities=None,
multiseries_id_columns: Optional[List[str]] = None,
use_cross_series_features: Optional[bool] = None,
aggregation_type: Optional[str] = None,
cross_series_group_by_columns: Optional[List[str]] = None,
calendar_id: Optional[str] = None,
holdout_end_date=None,
unsupervised_mode: bool = False,
model_splits: Optional[int] = None,
allow_partial_history_time_series_predictions: bool = False)
```

Uniquely defines a DatetimePartitioning for some project

Includes only the attributes of DatetimePartitioning that are directly controllable by users, not those determined by the DataRobot application based on the project dataset and the user-controlled settings.

This is the specification that should be passed to `Project.analyze_and_model` via the

`partitioning_method` parameter. To see the full partitioning based on the project dataset, use `DatetimePartitioning.generate`.

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Note that either `(holdout_start_date, holdout_duration)` or `(holdout_start_date, holdout_end_date)` can be used to specify holdout partitioning settings.

Attributes

`datetime_partition_column` [str] the name of the column whose values as dates are used to assign a row to a particular partition

`autopilot_data_selection_method` [str] one of `datarobot.enums.DATETIME_AUTOPILOT_DATA_SELECTION_METHOD`. Whether models created by the autopilot should use `rowCount` or `duration` as their `data_selection_method`.

`validation_duration` [str or None] the default `validation_duration` for the backtests

`holdout_start_date` [datetime.datetime or None] The start date of holdout scoring data. If `holdout_start_date` is specified, either `holdout_duration` or `holdout_end_date` must also be specified. If `disable_holdout` is set to `True`, `holdout_start_date`, `holdout_duration`, and `holdout_end_date` may not be specified.

`holdout_duration` [str or None] The duration of the holdout scoring data. If `holdout_duration` is specified, `holdout_start_date` must also be specified. If `disable_holdout` is set to `True`, `holdout_duration`, `holdout_start_date`, and `holdout_end_date` may not be specified.

`holdout_end_date` [datetime.datetime or None] The end date of holdout scoring data. If `holdout_end_date` is specified, `holdout_start_date` must also be specified. If `disable_holdout` is set to `True`, `holdout_end_date`, `holdout_start_date`, and `holdout_duration` may not be specified.

`disable_holdout` [bool or None] (New in version v2.8) Whether to suppress allocating a holdout fold. If set to `True`, `holdout_start_date`, `holdout_duration`, and `holdout_end_date` may not be specified.

`gap_duration` [str or None] The duration of the gap between training and holdout scoring data

`number_of_backtests` [int or None] the number of backtests to use

`backtests` [list of `BacktestSpecification`] the exact specification of backtests to use. The indices of the specified backtests should range from 0 to `number_of_backtests - 1`. If any backtest is left unspecified, a default configuration will be chosen.

`use_time_series` [bool] (New in version v2.8) Whether to create a time series project (if `True`) or an OTV project which uses datetime partitioning (if `False`). The default behavior is to create an OTV project.

`default_to_known_in_advance` [bool] (New in version v2.11) Optional, default `False`. Used for time series projects only. Sets whether all features default to being treated as known in advance. Known in advance features are expected to be known for dates in the future when making predictions, e.g., `is this a holiday?`. Individual features can be set to a value different than the default using the `feature_settings` parameter.

`default_to_do_not_derive` [bool] (New in v2.17) Optional, default `False`. Used for time series projects only. Sets whether all features default to being treated as do-not-derive features,

excluding them from feature derivation. Individual features can be set to a value different than the default by using the `feature_settings` parameter.

feature_derivation_window_start [int or None] (New in version v2.8) Only used for time series projects. Offset into the past to define how far back relative to the forecast point the feature derivation window should start. Expressed in terms of the `windows_basis_unit` and should be negative value or zero.

feature_derivation_window_end [int or None] (New in version v2.8) Only used for time series projects. Offset into the past to define how far back relative to the forecast point the feature derivation window should end. Expressed in terms of the `windows_basis_unit` and should be a negative value or zero.

feature_settings [list of *FeatureSettings*] (New in version v2.9) Optional, a list specifying per feature settings, can be left unspecified.

forecast_window_start [int or None] (New in version v2.8) Only used for time series projects. Offset into the future to define how far forward relative to the forecast point the forecast window should start. Expressed in terms of the `windows_basis_unit`.

forecast_window_end [int or None] (New in version v2.8) Only used for time series projects. Offset into the future to define how far forward relative to the forecast point the forecast window should end. Expressed in terms of the `windows_basis_unit`.

windows_basis_unit [string, optional] (New in version v2.14) Only used for time series projects. Indicates which unit is a basis for feature derivation window and forecast window. Valid options are detected time unit (one of the `datarobot.enums.TIME_UNITS`) or `âROWâ`. If omitted, the default value is the detected time unit.

treat_as_exponential [string, optional] (New in version v2.9) defaults to `âautoâ`. Used to specify whether to treat data as exponential trend and apply transformations like log-transform. Use values from the `datarobot.enums.TREAT_AS_EXPONENTIAL` enum.

differencing_method [string, optional] (New in version v2.9) defaults to `âautoâ`. Used to specify which differencing method to apply of case if data is stationary. Use values from `datarobot.enums.DIFFERENCING_METHOD` enum.

periodicities [list of *Periodicity*, optional] (New in version v2.9) a list of *datarobot.Periodicity*. Periodicities units should be `âROWâ`, if the `windows_basis_unit` is `âROWâ`.

multiseries_id_columns [list of str or null] (New in version v2.11) a list of the names of multiseries id columns to define series within the training data. Currently only one multiseries id column is supported.

use_cross_series_features [bool] (New in version v2.14) Whether to use cross series features.

aggregation_type [str, optional] (New in version v2.14) The aggregation type to apply when creating cross series features. Optional, must be one of `âtotalâ` or `âaverageâ`.

cross_series_group_by_columns [list of str, optional] (New in version v2.15) List of columns (currently of length 1). Optional setting that indicates how to further split series into related groups. For example, if every series is sales of an individual product, the series group-by could be the product category with values like `âmenâ` clothing, `âsports equipmentâ`, etc.. Can only be used in a multiseries project with `use_cross_series_features` set to `True`.

calendar_id [str, optional] (New in version v2.15) The id of the *CalendarFile* to use with this project.

unsupervised_mode: bool, optional (New in version v2.20) defaults to False, indicates whether partitioning should be constructed for the unsupervised project.

model_splits: int, optional (New in version v2.21) Sets the cap on the number of jobs per model used when building models to control number of jobs in the queue. Higher number of model splits will allow for less downsampling leading to the use of more post-processed data.

allow_partial_history_time_series_predictions: bool, optional (New in version v2.24) Whether to allow time series models to make predictions using partial historical data.

collect_payload() → Dict[str, Any]

Set up the dict that should be sent to the server when setting the target Returns `partitioning_spec`: dict

prep_payload(*project_id: str, max_wait: int = 600*) → None

Run any necessary validation and prep of the payload, including async operations

Mainly used for the datetime partitioning spec but implemented in general for consistency

update(***kwargs*) → None

Update this instance, matching attributes to kwargs

Mainly used for the datetime partitioning spec but implemented in general for consistency

```
class datarobot.BacktestSpecification(index: int, gap_duration: Optional[str] = None,  
                                     validation_start_date: Optional[datetime.datetime]  
                                     = None, validation_duration: Optional[str] = None,  
                                     validation_end_date: Optional[datetime.datetime]  
                                     = None, primary_training_start_date:  
                                     Optional[datetime.datetime] = None,  
                                     primary_training_end_date:  
                                     Optional[datetime.datetime] = None)
```

Uniquely defines a Backtest used in a DatetimePartitioning

Includes only the attributes of a backtest directly controllable by users. The other attributes are assigned by the DataRobot application based on the project dataset and the user-controlled settings.

There are two ways to specify an individual backtest:

Option 1: Use `index`, `gap_duration`, `validation_start_date`, and `validation_duration`. All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method.

```
import datarobot as dr

partitioning_spec = dr.DatetimePartitioningSpecification(
    backtests=[
        # modify the first backtest using option 1
        dr.BacktestSpecification(
            index=0,
            gap_duration=dr.partitioning_methods.construct_duration_string(),
            validation_start_date=datetime(year=2010, month=1, day=1),
            validation_duration=dr.partitioning_methods.construct_duration_
↪string(years=1),
        )
    ],
    # other partitioning settings...
)
```

Option 2 (New in version v2.20): Use `index`, `primary_training_start_date`, `primary_training_end_date`, `validation_start_date`, and `validation_end_date`. In this case, note that setting `primary_training_end_date` and `validation_start_date` to the same timestamp will result with no gap being created.

```
import datarobot as dr

partitioning_spec = dr.DatetimePartitioningSpecification(
    backtests=[
        # modify the first backtest using option 2
        dr.BacktestSpecification(
            index=0,
            primary_training_start_date=datetime(year=2005, month=1, day=1),
            primary_training_end_date=datetime(year=2010, month=1, day=1),
            validation_start_date=datetime(year=2010, month=1, day=1),
            validation_end_date=datetime(year=2011, month=1, day=1),
        )
    ],
    # other partitioning settings...
)
```

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Attributes

index [int] the index of the backtest to update

gap_duration [str] a duration string specifying the desired duration of the gap between training and validation scoring data for the backtest

validation_start_date [datetime.datetime] the desired start date of the validation scoring data for this backtest

validation_duration [str] a duration string specifying the desired duration of the validation scoring data for this backtest

validation_end_date [datetime.datetime] the desired end date of the validation scoring data for this backtest

primary_training_start_date [datetime.datetime] the desired start date of the training partition for this backtest

primary_training_end_date [datetime.datetime] the desired end date of the training partition for this backtest

class `datarobot.FeatureSettings` (*feature_name: str, known_in_advance: Optional[bool] = None, do_not_derive: Optional[bool] = None*)

Per feature settings

Attributes

feature_name [string] name of the feature

known_in_advance [bool] (New in version v2.11) Optional, for time series projects only. Sets whether the feature is known in advance, i.e., values for future dates are known at prediction time. If not specified, the feature uses the value from the `default_to_known_in_advance` flag.

do_not_derive [bool] (New in v2.17) Optional, for time series projects only. Sets whether the feature is excluded from feature derivation. If not specified, the feature uses the value from

the *default_to_do_not_derive* flag.

collect_payload (*use_a_priori*: bool = False) → FeatureSettingsPayload

Parameters

use_a_priori [bool][Switch to using the older *a_priori* key name instead of *known_in_advance*. Default: False]

Returns

BacktestSpecification dictionary representation

class datarobot.**Periodicity** (*time_steps*: int, *time_unit*: str)
Periodicity configuration

Parameters

time_steps [int] Time step value

time_unit [string] Time step unit, valid options are values from *datarobot.enums.TIME_UNITS*

Examples

```
from datarobot as dr
periodicities = [
    dr.Periodicity(time_steps=10, time_unit=dr.enums.TIME_UNITS.HOUR),
    dr.Periodicity(time_steps=600, time_unit=dr.enums.TIME_UNITS.MINUTE)]
spec = dr.DatetimePartitioningSpecification(
    # ...
    periodicities=periodicities
)
```

```

class datarobot.DatetimePartitioning (project_id=None,      datetime_partitioning_id=None,
                                       datetime_partition_column=None, date_format=None,
                                       autopilot_data_selection_method=None,
                                       validation_duration=None,                               avail-
                                       able_training_start_date=None,                       avail-
                                       able_training_duration=None,                       avail-
                                       able_training_row_count=None,                      avail-
                                       able_training_end_date=None,                       pri-
                                       mary_training_start_date=None,                     pri-
                                       mary_training_duration=None,                       pri-
                                       mary_training_row_count=None,                     pri-
                                       mary_training_end_date=None, gap_start_date=None,
                                       gap_duration=None, gap_row_count=None,
                                       gap_end_date=None, disable_holdout=None, hold-
                                       out_start_date=None, holdout_duration=None,
                                       holdout_row_count=None, holdout_end_date=None,
                                       number_of_backtests=None, backtests=None, to-
                                       tal_row_count=None, use_time_series=False,
                                       default_to_known_in_advance=False,
                                       default_to_do_not_derive=False,                   fea-
                                       ture_derivation_window_start=None,                 fea-
                                       ture_derivation_window_end=None,                 fea-
                                       ture_settings=None, forecast_window_start=None,
                                       forecast_window_end=None,                         win-
                                       dows_basis_unit=None, treat_as_exponential=None,
                                       differencing_method=None,                         periodici-
                                       ties=None, multiseries_id_columns=None,
                                       number_of_known_in_advance_features=0,
                                       number_of_do_not_derive_features=0,
                                       use_cross_series_features=None,
                                       aggregation_type=None,
                                       cross_series_group_by_columns=None,
                                       calendar_id=None,                                 calen-
                                       dar_name=None, model_splits=None, al-
                                       low_partial_history_time_series_predictions=False,
                                       unsupervised_mode=False)

```

Full partitioning of a project for datetime partitioning.

To instantiate, use `DatetimePartitioning.get(project_id)`.

Includes both the attributes specified by the user, as well as those determined by the DataRobot application based on the project dataset. In order to use a partitioning to set the target, call `to_specification` and pass the resulting `DatetimePartitioningSpecification` to `Project.analyze_and_model` via the `partitioning_method` parameter.

The available training data corresponds to all the data available for training, while the primary training data corresponds to the data that can be used to train while ensuring that all backtests are available. If a model is trained with more data than is available in the primary training data, then all backtests may not have scores available.

All durations are specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Attributes

project_id [str] the id of the project this partitioning applies to

- datetime_partitioning_id** [str or None] the id of the datetime partitioning it is an optimized partitioning
- datetime_partition_column** [str] the name of the column whose values as dates are used to assign a row to a particular partition
- date_format** [str] the format (e.g. `â€œIJ%Y-%m-%d %H:%M:%Sâ€œ`) by which the partition column was interpreted (compatible with `strftime`)
- autopilot_data_selection_method** [str] one of `datarobot.enums.DATETIME_AUTOPILOT_DATA_SELECTION_METHOD`. Whether models created by the autopilot use `â€œrowCountâ€œ` or `â€œdurationâ€œ` as their `data_selection_method`.
- validation_duration** [str or None] the validation duration specified when initializing the partitioning - not directly significant if the backtests have been modified, but used as the default `validation_duration` for the backtests. Can be absent if this is a time series project with an irregular primary date/time feature.
- available_training_start_date** [datetime.datetime] The start date of the available training data for scoring the holdout
- available_training_duration** [str] The duration of the available training data for scoring the holdout
- available_training_row_count** [int or None] The number of rows in the available training data for scoring the holdout. Only available when retrieving the partitioning after setting the target.
- available_training_end_date** [datetime.datetime] The end date of the available training data for scoring the holdout
- primary_training_start_date** [datetime.datetime or None] The start date of primary training data for scoring the holdout. Unavailable when the holdout fold is disabled.
- primary_training_duration** [str] The duration of the primary training data for scoring the holdout
- primary_training_row_count** [int or None] The number of rows in the primary training data for scoring the holdout. Only available when retrieving the partitioning after setting the target.
- primary_training_end_date** [datetime.datetime or None] The end date of the primary training data for scoring the holdout. Unavailable when the holdout fold is disabled.
- gap_start_date** [datetime.datetime or None] The start date of the gap between training and holdout scoring data. Unavailable when the holdout fold is disabled.
- gap_duration** [str] The duration of the gap between training and holdout scoring data
- gap_row_count** [int or None] The number of rows in the gap between training and holdout scoring data. Only available when retrieving the partitioning after setting the target.
- gap_end_date** [datetime.datetime or None] The end date of the gap between training and holdout scoring data. Unavailable when the holdout fold is disabled.
- disable_holdout** [bool or None] Whether to suppress allocating a holdout fold. If set to `True`, `holdout_start_date`, `holdout_duration`, and `holdout_end_date` may not be specified.
- holdout_start_date** [datetime.datetime or None] The start date of holdout scoring data. Unavailable when the holdout fold is disabled.
- holdout_duration** [str] The duration of the holdout scoring data

- holdout_row_count** [int or None] The number of rows in the holdout scoring data. Only available when retrieving the partitioning after setting the target.
- holdout_end_date** [datetime.datetime or None] The end date of the holdout scoring data. Unavailable when the holdout fold is disabled.
- number_of_backtests** [int] the number of backtests used.
- backtests** [list of *Backtest*] the configured backtests.
- total_row_count** [int] the number of rows in the project dataset. Only available when retrieving the partitioning after setting the target.
- use_time_series** [bool] (New in version v2.8) Whether to create a time series project (if `True`) or an OTV project which uses datetime partitioning (if `False`). The default behavior is to create an OTV project.
- default_to_known_in_advance** [bool] (New in version v2.11) Optional, default `False`. Used for time series projects only. Sets whether all features default to being treated as known in advance. Known in advance features are expected to be known for dates in the future when making predictions, e.g., “is this a holiday?”. Individual features can be set to a value different from the default using the `feature_settings` parameter.
- default_to_do_not_derive** [bool] (New in v2.17) Optional, default `False`. Used for time series projects only. Sets whether all features default to being treated as do-not-derive features, excluding them from feature derivation. Individual features can be set to a value different from the default by using the `feature_settings` parameter.
- feature_derivation_window_start** [int or None] (New in version v2.8) Only used for time series projects. Offset into the past to define how far back relative to the forecast point the feature derivation window should start. Expressed in terms of the `windows_basis_unit`.
- feature_derivation_window_end** [int or None] (New in version v2.8) Only used for time series projects. Offset into the past to define how far back relative to the forecast point the feature derivation window should end. Expressed in terms of the `windows_basis_unit`.
- feature_settings** [list of *FeatureSettings*] (New in version v2.9) Optional, a list specifying per feature settings, can be left unspecified.
- forecast_window_start** [int or None] (New in version v2.8) Only used for time series projects. Offset into the future to define how far forward relative to the forecast point the forecast window should start. Expressed in terms of the `windows_basis_unit`.
- forecast_window_end** [int or None] (New in version v2.8) Only used for time series projects. Offset into the future to define how far forward relative to the forecast point the forecast window should end. Expressed in terms of the `windows_basis_unit`.
- windows_basis_unit** [string, optional] (New in version v2.14) Only used for time series projects. Indicates which unit is a basis for feature derivation window and forecast window. Valid options are detected time unit (one of the `datarobot.enums.TIME_UNITS`) or “ROW”. If omitted, the default value is detected time unit.
- treat_as_exponential** [string, optional] (New in version v2.9) defaults to “auto”. Used to specify whether to treat data as exponential trend and apply transformations like log-transform. Use values from the `datarobot.enums.TREAT_AS_EXPONENTIAL` enum.
- differencing_method** [string, optional] (New in version v2.9) defaults to “auto”. Used to specify which differencing method to apply of case if data is stationary. Use values from the `datarobot.enums.DIFFERENCING_METHOD` enum.

periodicities [list of Periodicity, optional] (New in version v2.9) a list of `datarobot.Periodicity`. Periodicities units should be `â€œIJROWâ€œ`, if the `windows_basis_unit` is `â€œIJROWâ€œ`.

multiseries_id_columns [list of str or null] (New in version v2.11) a list of the names of multiseries id columns to define series within the training data. Currently only one multiseries id column is supported.

number_of_known_in_advance_features [int] (New in version v2.14) Number of features that are marked as known in advance.

number_of_do_not_derive_features [int] (New in v2.17) Number of features that are excluded from derivation.

use_cross_series_features [bool] (New in version v2.14) Whether to use cross series features.

aggregation_type [str, optional] (New in version v2.14) The aggregation type to apply when creating cross series features. Optional, must be one of `â€œtotalâ€œ` or `â€œaverageâ€œ`.

cross_series_group_by_columns [list of str, optional] (New in version v2.15) List of columns (currently of length 1). Optional setting that indicates how to further split series into related groups. For example, if every series is sales of an individual product, the series group-by could be the product category with values like `â€œmenâ€œ` `clothingâ€œ`, `â€œsports equipmentâ€œ`, etc.. Can only be used in a multiseries project with `use_cross_series_features` set to `True`.

calendar_id [str, optional] (New in version v2.15) Only available for time series projects. The id of the `CalendarFile` to use with this project.

calendar_name [str, optional] (New in version v2.17) Only available for time series projects. The name of the `CalendarFile` used with this project.

model_splits: int, optional (New in version v2.21) Sets the cap on the number of jobs per model used when building models to control number of jobs in the queue. Higher number of model splits will allow for less downsampling leading to the use of more post-processed data.

allow_partial_history_time_series_predictions: bool, optional (New in version v2.24) Whether to allow time series models to make predictions using partial historical data.

unsupervised_mode: bool, optional (New in version v3.1) Whether the date/time partitioning is for an unsupervised project

classmethod generate (*project_id, spec, max_wait=600, target=None*)

Preview the full partitioning determined by a `DatetimePartitioningSpecification`

Based on the project dataset and the partitioning specification, inspect the full partitioning that would be used if the same specification were passed into `Project.analyze_and_model`.

Parameters

project_id [str] the id of the project

spec [`DatetimePartitioningSpec`] the desired partitioning

max_wait [int, optional] For some settings (e.g. generating a partitioning preview for a multiseries project for the first time), an asynchronous task must be run to analyze the dataset. `max_wait` governs the maximum time (in seconds) to wait before giving up. In all non-multiseries projects, this is unused.

target [str, optional] the name of the target column. For unsupervised projects target may be `None`. Providing a target will ensure that partitions are correctly optimized for your dataset.

Returns

DatetimePartitioning [] the full generated partitioning

classmethod get (*project_id: str*) → **DatetimePartitioning**

Retrieve the **DatetimePartitioning** from a project

Only available if the project has already set the target as a datetime project.

Parameters

project_id [str] the id of the project to retrieve partitioning for

Returns

DatetimePartitioning [the full partitioning for the project]

classmethod generate_optimized (*project_id: str, spec: datarobot.helpers.partitioning_methods.DatetimePartitioningSpecification, target: str, max_wait: int = 600*) → **DatetimePartitioning**

Preview the full partitioning determined by a **DatetimePartitioningSpecification**

Based on the project dataset and the partitioning specification, inspect the full partitioning that would be used if the same specification were passed into *Project.analyze_and_model*.

Parameters

project_id [str] the id of the project

spec [**DatetimePartitioningSpecification**] the desired partitioning

target [str] the name of the target column. For unsupervised projects target may be None.

max_wait [int, optional] Governs the maximum time (in seconds) to wait before giving up.

Returns

DatetimePartitioning [] the full generated partitioning

classmethod get_optimized (*project_id: str, datetime_partitioning_id*) → **DatetimePartitioning**

Retrieve an **Optimized DatetimePartitioning** from a project for the specified *datetime_partitioning_id*. A *datetime_partitioning_id* is created by using the *generate_optimized* function.

Parameters

project_id [str] the id of the project to retrieve partitioning for

datetime_partitioning_id [**ObjectId**] the **ObjectId** associated with the project to retrieve from mongo

Returns

DatetimePartitioning [the full partitioning for the project]

classmethod feature_log_list (*project_id: str, offset: Optional[int] = None, limit: Optional[int] = None*)

Retrieve the feature derivation log content and log length for a time series project.

The Time Series Feature Log provides details about the feature generation process for a time series project. It includes information about which features are generated and their priority, as well as the detected properties of the time series data such as whether the series is stationary, and periodicities detected.

This route is only supported for time series projects that have finished partitioning.

The feature derivation log will include information about:

- Detected stationarity of the series:
e.g. `Series detected as non-stationary`

- Detected presence of multiplicative trend in the series:
e.g. `â€”Multiplicative trend detectedâ€”`
- Detected presence of multiplicative trend in the series:
e.g. `â€”Detected periodicities: 7 dayâ€”`
- Maximum number of feature to be generated:
e.g. `â€”Maximum number of feature to be generated is 1440â€”`
- Window sizes used in rolling statistics / lag extractors
e.g. `â€”The window sizes chosen to be: 2 months
(because the time step is 1 month and Feature Derivation Window is 2 months)â€”`
- Features that are specified as known-in-advance
e.g. `â€”Variables treated as apriori: holidayâ€”`
- Details about why certain variables are transformed in the input data
e.g. `â€”Generating variable log from Ij because multiplicative trend
is detectedâ€”`
- Details about features generated as timeseries features, and their priority
e.g. `â€”Generating feature date (actual) from date (priority: 1)â€”`

Parameters

project_id [str] project id to retrieve a feature derivation log for.

offset [int] optional, defaults is 0, this many results will be skipped.

limit [int] optional, defaults to 100, at most this many results are returned. To specify no limit, use 0. The default may change without notice.

classmethod feature_log_retrieve (*project_id: str*) → str

Retrieve the feature derivation log content and log length for a time series project.

The Time Series Feature Log provides details about the feature generation process for a time series project. It includes information about which features are generated and their priority, as well as the detected properties of the time series data such as whether the series is stationary, and periodicities detected.

This route is only supported for time series projects that have finished partitioning.

The feature derivation log will include information about:

- Detected stationarity of the series:
e.g. `â€”Series detected as non-stationaryâ€”`
- Detected presence of multiplicative trend in the series:
e.g. `â€”Multiplicative trend detectedâ€”`
- Detected presence of multiplicative trend in the series:
e.g. `â€”Detected periodicities: 7 dayâ€”`
- Maximum number of feature to be generated:
e.g. `â€”Maximum number of feature to be generated is 1440â€”`
- Window sizes used in rolling statistics / lag extractors
e.g. `â€”The window sizes chosen to be: 2 months
(because the time step is 1 month and Feature Derivation Window is 2 months)â€”`
- Features that are specified as known-in-advance

e.g. Variables treated as apriori: holiday

- Details about why certain variables are transformed in the input data
e.g. Generating variable `log` from `log` because multiplicative trend is detected
- Details about features generated as timeseries features, and their priority
e.g. Generating feature `date (actual)` from `date` (priority: 1)

Parameters

project_id [str] project id to retrieve a feature derivation log for.

to_specification (*use_holdout_start_end_format*: bool = False, *use_backtest_start_end_format*: bool = False) → `datarobot.helpers.partitioning_methods.DatetimePartitioningSpecification`

Render the `DatetimePartitioning` as a *DatetimePartitioningSpecification*

The resulting specification can be used when setting the target, and contains only the attributes directly controllable by users.

Parameters

use_holdout_start_end_format [bool, optional] Defaults to False. If True, will use `holdout_end_date` when configuring the holdout partition. If False, will use `holdout_duration` instead.

use_backtest_start_end_format [bool, optional] Defaults to False. If False, will use a duration-based approach for specifying backtests (`gap_duration`, `validation_start_date`, and `validation_duration`). If True, will use a start/end date approach for specifying backtests (`primary_training_start_date`, `primary_training_end_date`, `validation_start_date`, `validation_end_date`). In contrast, projects created in the Web UI will use the start/end date approach for specifying backtests. Set this parameter to True to mirror the behavior in the Web UI.

Returns

DatetimePartitioningSpecification the specification for this partitioning

to_dataframe () → `pandas.core.frame.DataFrame`

Render the partitioning settings as a dataframe for convenience of display

Excludes `project_id`, `datetime_partition_column`, `date_format`, `autopilot_data_selection_method`, `validation_duration`, and `number_of_backtests`, as well as the row count information, if present.

Also excludes the time series specific parameters for `use_time_series`, `default_to_known_in_advance`, `default_to_do_not_derive`, and defining the feature derivation and forecast windows.

```
class datarobot.helpers.partitioning_methods.Backtest (index: Optional[int]
= None, available_training_start_date: Optional[datetime.datetime]
= None, available_training_duration: Optional[str] = None, avail-
able_training_row_count: Optional[int] = None, avail-
able_training_end_date: Optional[datetime.datetime]
= None, primary_training_start_date: Optional[datetime.datetime]
= None, primary_training_duration: Optional[str] = None, pri-
mary_training_row_count: Optional[int] = None, pri-
mary_training_end_date: Optional[datetime.datetime]
= None, gap_start_date: Optional[datetime.datetime]
= None, gap_duration: Optional[str] = None,
gap_row_count: Optional[int] = None,
gap_end_date: Optional[datetime.datetime] =
None, validation_start_date: Optional[datetime.datetime]
= None, validation_duration: Optional[str] = None,
validation_row_count: Optional[int] = None,
validation_end_date: Optional[datetime.datetime]
= None, total_row_count: Optional[int] = None)
```

A backtest used to evaluate models trained in a datetime partitioned project

When setting up a datetime partitioning project, backtests are specified by a *BacktestSpecification*.

The available training data corresponds to all the data available for training, while the primary training data corresponds to the data that can be used to train while ensuring that all backtests are available. If a model is trained with more data than is available in the primary training data, then all backtests may not have scores available.

All durations are specified with a duration string such as those returned by the *partitioning_methods.construct_duration_string* helper method. Please see *datetime partitioned project documentation* for more information on duration strings.

Attributes

index [int] the index of the backtest

available_training_start_date [datetime.datetime] the start date of the available training data

for this backtest

available_training_duration [str] the duration of available training data for this backtest

available_training_row_count [int or None] the number of rows of available training data for this backtest. Only available when retrieving from a project where the target is set.

available_training_end_date [datetime.datetime] the end date of the available training data for this backtest

primary_training_start_date [datetime.datetime] the start date of the primary training data for this backtest

primary_training_duration [str] the duration of the primary training data for this backtest

primary_training_row_count [int or None] the number of rows of primary training data for this backtest. Only available when retrieving from a project where the target is set.

primary_training_end_date [datetime.datetime] the end date of the primary training data for this backtest

gap_start_date [datetime.datetime] the start date of the gap between training and validation scoring data for this backtest

gap_duration [str] the duration of the gap between training and validation scoring data for this backtest

gap_row_count [int or None] the number of rows in the gap between training and validation scoring data for this backtest. Only available when retrieving from a project where the target is set.

gap_end_date [datetime.datetime] the end date of the gap between training and validation scoring data for this backtest

validation_start_date [datetime.datetime] the start date of the validation scoring data for this backtest

validation_duration [str] the duration of the validation scoring data for this backtest

validation_row_count [int or None] the number of rows of validation scoring data for this backtest. Only available when retrieving from a project where the target is set.

validation_end_date [datetime.datetime] the end date of the validation scoring data for this backtest

total_row_count [int or None] the number of rows in this backtest. Only available when retrieving from a project where the target is set.

to_specification (*use_start_end_format*: bool = False) → BacktestSpecification

Render this backtest as a *BacktestSpecification*.

The resulting specification includes only the attributes users can directly control, not those indirectly determined by the project dataset.

Parameters

use_start_end_format [bool] Default False. If False, will use a duration-based approach for specifying backtests (*gap_duration*, *validation_start_date*, and *validation_duration*). If True, will use a start/end date approach for specifying backtests (*primary_training_start_date*, *primary_training_end_date*, *validation_start_date*, and *validation_end_date*). In contrast, projects created in the Web UI will use the start/end date approach for specifying backtests. Set this parameter to True to mirror the behavior in the Web UI.

Returns**BacktestSpecification** the specification for this backtest**to_dataframe** () → pandas.core.frame.DataFrame

Render this backtest as a dataframe for convenience of display

Returns**backtest_partitioning** [pandas.DataFrame] the backtest attributes, formatted into a dataframe

```

datarobot.helpers.partitioning_methods.construct_duration_string(years: int =
    0, months:
    int = 0,
    days: int = 0,
    hours: int =
    0, minutes:
    int = 0, sec-
    onds: int =
    0) → str

```

Construct a valid string representing a duration in accordance with ISO8601

A duration of six months, 3 days, and 12 hours could be represented as P6M3DT12H.

Parameters**years** [int] the number of years in the duration**months** [int] the number of months in the duration**days** [int] the number of days in the duration**hours** [int] the number of hours in the duration**minutes** [int] the number of minutes in the duration**seconds** [int] the number of seconds in the duration**Returns****duration_string: str** The duration string, specified compatibly with ISO8601

2.3.37 PayoffMatrix

```

class datarobot.models.PayoffMatrix(project_id: str, id: str, name: Optional[str] =
    None, true_positive_value: Optional[float] = None,
    true_negative_value: Optional[float] = None,
    false_positive_value: Optional[float] = None,
    false_negative_value: Optional[float] = None)

```

Represents a Payoff Matrix, a costs/benefit scenario used for creating a profit curve.

Examples

```

import datarobot as dr

# create a payoff matrix
payoff_matrix = dr.PayoffMatrix.create(
    project_id,
    name,

```

(continues on next page)

(continued from previous page)

```

true_positive_value=100,
true_negative_value=10,
false_positive_value=0,
false_negative_value=-10,
)

# list available payoff matrices
payoff_matrices = dr.PayoffMatrix.list(project_id)
payoff_matrix = payoff_matrices[0]

```

Attributes**project_id** [str] id of the project with which the payoff matrix is associated.**id** [str] id of the payoff matrix.**name** [str] User-supplied label for the payoff matrix.**true_positive_value** [float] Cost or benefit of a true positive classification**true_negative_value** [float] Cost or benefit of a true negative classification**false_positive_value** [float] Cost or benefit of a false positive classification**false_negative_value** [float] Cost or benefit of a false negative classification

classmethod create (*project_id: str, name: str, true_positive_value: Optional[float] = 1, true_negative_value: Optional[float] = 1, false_positive_value: Optional[float] = -1, false_negative_value: Optional[float] = -1*) → datarobot.models.payoff_matrix.PayoffMatrix

Create a payoff matrix associated with a specific project.

Parameters**project_id** [str] id of the project with which the payoff matrix will be associated**Returns****payoff_matrix** [*PayoffMatrix*] The newly created payoff matrix

classmethod list (*project_id: str*) → List[datarobot.models.payoff_matrix.PayoffMatrix]

Fetch all the payoff matrices for a project.

Parameters**project_id** [str] id of the project**Returns**

•••

List of PayoffMatrix A list of *PayoffMatrix* objects**Raises**

•••

datarobot.errors.ClientError if the server responded with 4xx status**datarobot.errors.ServerError** if the server responded with 5xx status

classmethod get (*project_id: str, id: str*) → datarobot.models.payoff_matrix.PayoffMatrix

Retrieve a specified payoff matrix.

Parameters

project_id [str] id of the project the model belongs to

id [str] id of the payoff matrix

Returns

PayoffMatrix object representing specified

payoff matrix

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod update (*project_id: str, id: str, name: str, true_positive_value: float, true_negative_value: float, false_positive_value: float, false_negative_value: float*) → *datarobot.models.payoff_matrix.PayoffMatrix*

Update (replace) a payoff matrix. Note that all data fields are required.

Parameters

project_id [str] id of the project to which the payoff matrix belongs

id [str] id of the payoff matrix

name [str] User-supplied label for the payoff matrix

true_positive_value [float] True positive payoff value to use for the profit curve

true_negative_value [float] True negative payoff value to use for the profit curve

false_positive_value [float] False positive payoff value to use for the profit curve

false_negative_value [float] False negative payoff value to use for the profit curve

Returns

payoff_matrix *PayoffMatrix* with updated values

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod delete (*project_id: str, id: str*) → *requests.models.Response*

Delete a specified payoff matrix.

Parameters

project_id [str] id of the project the model belongs to

id [str] id of the payoff matrix

Returns

response [*requests.Response*] Empty response (204)

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod from_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]]*) → T

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

classmethod from_server_data (*data: Union[Dict[str, Any], List[Dict[str, Any]]], keep_attrs: Optional[Iterable[str]] = None*) → T

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [dict] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [iterable] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

2.3.38 PredictJob

`datarobot.models.predict_job.wait_for_async_predictions` (*project_id: str, predict_job_id: str, max_wait: int = 600*) → `pandas.core.frame.DataFrame`

Given a Project id and PredictJob id poll for status of process responsible for predictions generation until it's finished

Parameters

project_id [str] The identifier of the project

predict_job_id [str] The identifier of the PredictJob

max_wait [int, optional] Time in seconds after which predictions creation is considered unsuccessful

Returns

predictions [pandas.DataFrame] Generated predictions.

Raises

AsyncPredictionsGenerationError Raised if status of fetched PredictJob object is `error`

AsyncTimeoutError Predictions weren't generated in time, specified by `max_wait` parameter

class `datarobot.models.PredictJob` (*data, completed_resource_url=None*)

Tracks asynchronous work being done within a project

Attributes

id [int] the id of the job

project_id [str] the id of the project the job belongs to

status [str] the status of the job - will be one of `datarobot.enums.QUEUE_STATUS`

job_type [str] what kind of work the job is doing - will be `'predict'` for predict jobs

is_blocked [bool] if true, the job is blocked (cannot be executed) until its dependencies are resolved

message [str] a message about the state of the job, typically explaining why an error occurred

classmethod `from_job` (*job: datarobot.models.job.Job*) → datarobot.models.predict_job.PredictJob
Transforms a generic Job into a PredictJob

Parameters

job: Job A generic job representing a PredictJob

Returns

predict_job: PredictJob A fully populated PredictJob with all the details of the job

Raises

ValueError: If the generic Job was not a predict job, e.g. `job_type != JOB_TYPE.PREDICT`

classmethod `get` (*project_id: str, predict_job_id: str*) → datarobot.models.predict_job.PredictJob
Fetches one PredictJob. If the job finished, raises PendingJobFinished exception.

Parameters

project_id [str] The identifier of the project the model on which prediction was started belongs to

predict_job_id [str] The identifier of the predict_job

Returns

predict_job [PredictJob] The pending PredictJob

Raises

PendingJobFinished If the job being queried already finished, and the server is re-routing to the finished predictions.

AsyncFailureError Querying this resource gave a status code other than 200 or 303

classmethod `get_predictions` (*project_id: str, predict_job_id: str, class_prefix: str = 'class_'*)
→ pandas.core.frame.DataFrame
Fetches finished predictions from the job used to generate them.

Note: The prediction API for classifications now returns an additional prediction_values dictionary that is converted into a series of class_prefixed columns in the final dataframe. For example, <label> = 1.0 is converted to `class_1.0`. If you are on an older version of the client (prior to v2.8), you must update to v2.8 to correctly pivot this data.

Parameters

project_id [str] The identifier of the project to which belongs the model used for predictions generation

predict_job_id [str] The identifier of the predict_job

class_prefix [str] The prefix to append to labels in the final dataframe (e.g., apple -> class_apple)

Returns

predictions [pandas.DataFrame] Generated predictions

Raises

JobNotFinished If the job has not finished yet

AsyncFailureError Querying the predict_job in question gave a status code other than 200 or 303

cancel ()

Cancel this job. If this job has not finished running, it will be removed and canceled.

get_result (params=None)

Parameters

params [dict or None] Query parameters to be added to request to get results.

For featureEffects and featureFit, source param is required to define source, otherwise the default is ‘training‘

Returns

result [object]

Return type depends on the job type:

- for model jobs, a Model is returned
- for predict jobs, a pandas.DataFrame (with predictions) is returned
- for featureImpact jobs, a list of dicts by default (see `with_metadata` parameter of the `FeatureImpactJob` class and its `get ()` method).
- for primeRulesets jobs, a list of Rulesets
- for primeModel jobs, a PrimeModel
- for primeDownloadValidation jobs, a PrimeFile
- for predictionExplanationInitialization jobs, a PredictionExplanationsInitialization
- for predictionExplanations jobs, a PredictionExplanations
- for featureEffects, a FeatureEffects
- for featureFit, a FeatureFit

Raises

JobNotFinished If the job is not finished, the result is not available.

AsyncProcessUnsuccessfulError If the job errored or was aborted

get_result_when_complete (max_wait=600, params=None)

Parameters

max_wait [int, optional] How long to wait for the job to finish.

params [dict, optional] Query parameters to be added to request.

Returns

result: object Return type is the same as would be returned by `Job.get_result`.

Raises

AsyncTimeoutError If the job does not finish in time

AsyncProcessUnsuccessfulError If the job errored or was aborted

refresh ()

Update this object with the latest job data from the server.

wait_for_completion (*max_wait*: int = 600) → None
Waits for job to complete.

Parameters

max_wait [int, optional] How long to wait for the job to finish.

2.3.39 Prediction Dataset

```
class datarobot.models.PredictionDataset (project_id: str, id: str, name: str, created:  
str, num_rows: int, num_columns: int, fore-  
cast_point: Optional[datetime] = None, predic-  
tions_start_date: Optional[datetime] = None,  
predictions_end_date: Optional[datetime] =  
None, relax_known_in_advance_features_check:  
Optional[bool] = None, data_quality_warnings:  
Optional[DataQualityWarning] = None, fore-  
cast_point_range: Optional[List[datetime]] =  
None, data_start_date: Optional[datetime] =  
None, data_end_date: Optional[datetime] =  
None, max_forecast_date: Optional[datetime]  
= None, actual_value_column: Optional[str]  
= None, detected_actual_value_columns: Op-  
tional[List[DetectedActualValueColumn]] =  
None, contains_target_values: Optional[bool]  
= None, secondary_datasets_config_id: Op-  
tional[str] = None)
```

A dataset uploaded to make predictions

Typically created via *project.upload_dataset*

Attributes

id [str] the id of the dataset

project_id [str] the id of the project the dataset belongs to

created [str] the time the dataset was created

name [str] the name of the dataset

num_rows [int] the number of rows in the dataset

num_columns [int] the number of columns in the dataset

forecast_point [datetime.datetime or None] For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series [predictions documentation](#) for more information.

predictions_start_date [datetime.datetime or None, optional] For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_end_date*. Can't be provided with the *forecast_point* parameter.

predictions_end_date [datetime.datetime or None, optional] For time series projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_start_date*. Can't be provided with the *forecast_point* parameter.

relax_known_in_advance_features_check [bool, optional] (New in version v2.15) For time series projects only. If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

data_quality_warnings [dict, optional] (New in version v2.15) A dictionary that contains available warnings about potential problems in this prediction dataset. Available warnings include:

has_kia_missing_values_in_forecast_window [bool] Applicable for time series projects. If True, known in advance features have missing values in forecast window which may decrease prediction accuracy.

insufficient_rows_for_evaluating_models [bool] Applicable for datasets which are used as external test sets. If True, there is not enough rows in dataset to calculate insights.

single_class_actual_value_column [bool] Applicable for datasets which are used as external test sets. If True, actual value column has only one class and such insights as ROC curve can not be calculated. Only applies for binary classification projects or unsupervised projects.

forecast_point_range [list[datetime.datetime] or None, optional] (New in version v2.20) For time series projects only. Specifies the range of dates available for use as a forecast point.

data_start_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The minimum primary date of this prediction dataset.

data_end_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The maximum primary date of this prediction dataset.

max_forecast_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The maximum forecast date of this prediction dataset.

actual_value_column [string, optional] (New in version v2.21) Optional, only available for unsupervised projects, in case dataset was uploaded with actual value column specified. Name of the column which will be used to calculate the classification metrics and insights.

detected_actual_value_columns [list of dict, optional] (New in version v2.21) For unsupervised projects only, list of detected actual value columns information containing missing count and name for each column.

contains_target_values [bool, optional] (New in version v2.21) Only for supervised projects. If True, dataset contains target values and can be used to calculate the classification metrics and insights.

secondary_datasets_config_id: string or None, optional (New in version v2.23) The Id of the alternative secondary dataset config to use during prediction for Feature discovery project.

classmethod get (*project_id: str, dataset_id: str*) → datarobot.models.prediction_dataset.PredictionDataset
Retrieve information about a dataset uploaded for predictions

Parameters

project_id: the id of the project to query

dataset_id: the id of the dataset to retrieve

Returns

dataset: PredictionDataset A dataset uploaded to make predictions

delete () → None

Delete a dataset uploaded for predictions

Will also delete predictions made using this dataset and cancel any predict jobs using this dataset.

2.3.40 Prediction Explanations

class datarobot.**PredictionExplanationsInitialization** (*project_id*, *model_id*, *prediction_explanations_sample=None*)

Represents a prediction explanations initialization of a model.

Attributes

project_id [str] id of the project the model belongs to

model_id [str] id of the model the prediction explanations initialization is for

prediction_explanations_sample [list of dict] a small sample of prediction explanations that could be generated for the model

classmethod **get** (*project_id*, *model_id*)

Retrieve the prediction explanations initialization for a model.

Prediction explanations initializations are a prerequisite for computing prediction explanations, and include a sample what the computed prediction explanations for a prediction dataset would look like.

Parameters

project_id [str] id of the project the model belongs to

model_id [str] id of the model the prediction explanations initialization is for

Returns

prediction_explanations_initialization [PredictionExplanationsInitialization] The queried instance.

Raises

ClientError (404) If the project or model does not exist or the initialization has not been computed.

classmethod **create** (*project_id*, *model_id*)

Create a prediction explanations initialization for the specified model.

Parameters

project_id [str] id of the project the model belongs to

model_id [str] id of the model for which initialization is requested

Returns

job [Job] an instance of created async job

delete ()

Delete this prediction explanations initialization.

class datarobot.**PredictionExplanations** (*id*, *project_id*, *model_id*, *dataset_id*, *max_explanations*, *num_columns*, *finish_time*, *prediction_explanations_location*, *threshold_low=None*, *threshold_high=None*, *class_names=None*, *num_top_classes=None*)

Represents prediction explanations metadata and provides access to computation results.

Examples

```
prediction_explanations = dr.PredictionExplanations.get(project_id, explanations_
→id)
for row in prediction_explanations.get_rows():
    print(row) # row is an instance of PredictionExplanationsRow
```

Attributes

- id** [str] id of the record and prediction explanations computation result
- project_id** [str] id of the project the model belongs to
- model_id** [str] id of the model the prediction explanations are for
- dataset_id** [str] id of the prediction dataset prediction explanations were computed for
- max_explanations** [int] maximum number of prediction explanations to supply per row of the dataset
- threshold_low** [float] the lower threshold, below which a prediction must score in order for prediction explanations to be computed for a row in the dataset
- threshold_high** [float] the high threshold, above which a prediction must score in order for prediction explanations to be computed for a row in the dataset
- num_columns** [int] the number of columns prediction explanations were computed for
- finish_time** [float] timestamp referencing when computation for these prediction explanations finished
- prediction_explanations_location** [str] where to retrieve the prediction explanations

classmethod **get** (*project_id*, *prediction_explanations_id*)

Retrieve a specific prediction explanations metadata.

Parameters

- project_id** [str] id of the project the explanations belong to
- prediction_explanations_id** [str] id of the prediction explanations

Returns

- prediction_explanations** [PredictionExplanations] The queried instance.

classmethod **create** (*project_id*, *model_id*, *dataset_id*, *max_explanations=None*, *threshold_low=None*, *threshold_high=None*, *mode=None*)

Create prediction explanations for the specified dataset.

In order to create PredictionExplanations for a particular model and dataset, you must first:

- Compute feature impact for the model via `datarobot.Model.get_feature_impact()`
- Compute a PredictionExplanationsInitialization for the model via `datarobot.PredictionExplanationsInitialization.create(project_id, model_id)`
- Compute predictions for the model and dataset via `datarobot.Model.request_predictions(dataset_id)`

`threshold_high` and `threshold_low` are optional filters applied to speed up computation. When at least one is specified, only the selected outlier rows will have prediction explanations computed. Rows are considered to be outliers if their predicted value (in case of regression projects) or probability of

being the positive class (in case of classification projects) is less than `threshold_low` or greater than `thresholdHigh`. If neither is specified, prediction explanations will be computed for all rows.

Parameters

project_id [str] id of the project the model belongs to

model_id [str] id of the model for which prediction explanations are requested

dataset_id [str] id of the prediction dataset for which prediction explanations are requested

threshold_low [float, optional] the lower threshold, below which a prediction must score in order for prediction explanations to be computed for a row in the dataset. If neither `threshold_high` nor `threshold_low` is specified, prediction explanations will be computed for all rows.

threshold_high [float, optional] the high threshold, above which a prediction must score in order for prediction explanations to be computed. If neither `threshold_high` nor `threshold_low` is specified, prediction explanations will be computed for all rows.

max_explanations [int, optional] the maximum number of prediction explanations to supply per row of the dataset, default: 3.

mode [PredictionExplanationsMode, optional] mode of calculation for multiclass models, if not specified - server default is to explain only the predicted class, identical to passing `TopPredictionsMode(1)`.

Returns

job: Job an instance of created async job

classmethod list (*project_id, model_id=None, limit=None, offset=None*)

List of prediction explanations metadata for a specified project.

Parameters

project_id [str] id of the project to list prediction explanations for

model_id [str, optional] if specified, only prediction explanations computed for this model will be returned

limit [int or None] at most this many results are returned, default: no limit

offset [int or None] this many results will be skipped, default: 0

Returns

prediction_explanations [list[PredictionExplanations]]

get_rows (*batch_size=None, exclude_adjusted_predictions=True*)

Retrieve prediction explanations rows.

Parameters

batch_size [int or None, optional] maximum number of prediction explanations rows to retrieve per request

exclude_adjusted_predictions [bool] Optional, defaults to True. Set to False to include adjusted predictions, which will differ from the predictions on some projects, e.g. those with an exposure column specified.

Yields

prediction_explanations_row [PredictionExplanationsRow] Represents prediction explanations computed for a prediction row.

is_multiclass()

Whether these explanations are for a multiclass project or a non-multiclass project

is_unsupervised_clustering_or_multiclass()

Clustering and muliclass XEMP always has either one of num_top_classes or class_names parameters set

get_number_of_explained_classes()

How many classes we attempt to explain for each row

get_all_as_dataframe(exclude_adjusted_predictions=True)

Retrieve all prediction explanations rows and return them as a pandas.DataFrame.

Returned dataframe has the following structure:

- row_id : row id from prediction dataset
- prediction : the output of the model for this row
- adjusted_prediction : adjusted prediction values (only appears for projects that utilize prediction adjustments, e.g. projects with an exposure column)
- class_0_label : a class level from the target (only appears for classification projects)
- class_0_probability : the probability that the target is this class (only appears for classification projects)
- class_1_label : a class level from the target (only appears for classification projects)
- class_1_probability : the probability that the target is this class (only appears for classification projects)
- explanation_0_feature : the name of the feature contributing to the prediction for this explanation
- explanation_0_feature_value : the value the feature took on
- explanation_0_label : the output being driven by this explanation. For regression projects, this is the name of the target feature. For classification projects, this is the class label whose probability increasing would correspond to a positive strength.
- explanation_0_qualitative_strength : a human-readable description of how strongly the feature affected the prediction (e.g. "+++", "−", "+") for this explanation
- explanation_0_strength : the amount this feature's value affected the prediction
- ε
- explanation_N_feature : the name of the feature contributing to the prediction for this explanation
- explanation_N_feature_value : the value the feature took on
- explanation_N_label : the output being driven by this explanation. For regression projects, this is the name of the target feature. For classification projects, this is the class label whose probability increasing would correspond to a positive strength.
- explanation_N_qualitative_strength : a human-readable description of how strongly the feature affected the prediction (e.g. "+++", "−", "+") for this explanation
- explanation_N_strength : the amount this feature's value affected the prediction

For classification projects, the server does not guarantee any ordering on the prediction values, however within this function we sort the values so that *class_X* corresponds to the same class from row to row.

Parameters

exclude_adjusted_predictions [bool] Optional, defaults to True. Set this to False to include adjusted prediction values in the returned dataframe.

Returns**dataframe:** `pandas.DataFrame`**download_to_csv** (*filename*, *encoding='utf-8'*, *exclude_adjusted_predictions=True*)

Save prediction explanations rows into CSV file.

Parameters**filename** [str or file object] path or file object to save prediction explanations rows**encoding** [string, optional] A string representing the encoding to use in the output file, defaults to `'utf-8'`**exclude_adjusted_predictions** [bool] Optional, defaults to `True`. Set to `False` to include adjusted predictions, which will differ from the predictions on some projects, e.g. those with an exposure column specified.**get_prediction_explanations_page** (*limit=None*, *offset=None*, *exclude_adjusted_predictions=True*)

Get prediction explanations.

If you don't want use a generator interface, you can access paginated prediction explanations directly.

Parameters**limit** [int or None] the number of records to return, the server will use a (possibly finite) default if not specified**offset** [int or None] the number of records to skip, default 0**exclude_adjusted_predictions** [bool] Optional, defaults to `True`. Set to `False` to include adjusted predictions, which will differ from the predictions on some projects, e.g. those with an exposure column specified.**Returns****prediction_explanations** [PredictionExplanationsPage]**delete** ()

Delete these prediction explanations.

```
class datarobot.models.prediction_explanations.PredictionExplanationsRow (row_id,  
                                                                    pre-  
                                                                    dic-  
                                                                    tion,  
                                                                    pre-  
                                                                    dic-  
                                                                    tion_values,  
                                                                    pre-  
                                                                    dic-  
                                                                    tion_explanations=None,  
                                                                    ad-  
                                                                    justed_prediction=None,  
                                                                    ad-  
                                                                    justed_prediction_values=None)
```

Represents prediction explanations computed for a prediction row.

Notes

PredictionValue contains:

- `label` : describes what this model output corresponds to. For regression projects, it is the name of the target feature. For classification projects, it is a level from the target feature.
- `value` : the output of the prediction. For regression projects, it is the predicted value of the target. For classification projects, it is the predicted probability the row belongs to the class identified by the label.

`PredictionExplanation` contains:

- `label` : described what output was driven by this explanation. For regression projects, it is the name of the target feature. For classification projects, it is the class whose probability increasing would correspond to a positive strength of this prediction explanation.
- `feature` : the name of the feature contributing to the prediction
- `feature_value` : the value the feature took on for this row
- `strength` : the amount this feature's value affected the prediction
- `qualitative_strength` : a human-readable description of how strongly the feature affected the prediction (e.g. "+++", "--", "+")

Attributes

row_id [int] which row this `PredictionExplanationsRow` describes

prediction [float] the output of the model for this row

adjusted_prediction [float or None] adjusted prediction value for projects that provide this information, None otherwise

prediction_values [list] an array of dictionaries with a schema described as `PredictionValue`

adjusted_prediction_values [list] same as `prediction_values` but for adjusted predictions

prediction_explanations [list] an array of dictionaries with a schema described as `PredictionExplanation`

```
class datarobot.models.prediction_explanations.PredictionExplanationsPage(id,
                                                                    count=None,
                                                                    pre-
                                                                    vi-
                                                                    ous=None,
                                                                    next=None,
                                                                    data=None,
                                                                    pre-
                                                                    dic-
                                                                    tion_explanations_recon-
                                                                    ad-
                                                                    just-
                                                                    ment_method=None)
```

Represents a batch of prediction explanations received by one request.

Attributes

id [str] id of the prediction explanations computation result

data [list[dict]] list of raw prediction explanations; each row corresponds to a row of the prediction dataset

count [int] total number of rows computed

previous_page [str] where to retrieve previous page of prediction explanations, None if current page is the first

next_page [str] where to retrieve next page of prediction explanations, None if current page is the last

prediction_explanations_record_location [str] where to retrieve the prediction explanations metadata

adjustment_method [str] Adjustment method that was applied to predictions, or `None` if no adjustments were done.

classmethod `get` (*project_id*, *prediction_explanations_id*, *limit=None*, *offset=0*, *exclude_adjusted_predictions=True*)

Retrieve prediction explanations.

Parameters

project_id [str] id of the project the model belongs to

prediction_explanations_id [str] id of the prediction explanations

limit [int or None] the number of records to return; the server will use a (possibly finite) default if not specified

offset [int or None] the number of records to skip, default 0

exclude_adjusted_predictions [bool] Optional, defaults to True. Set to False to include adjusted predictions, which will differ from the predictions on some projects, e.g. those with an exposure column specified.

Returns

prediction_explanations [PredictionExplanationsPage] The queried instance.

class `datarobot.models.ShapMatrix` (*project_id: str*, *id: str*, *model_id: Optional[str] = None*, *dataset_id: Optional[str] = None*)

Represents SHAP based prediction explanations and provides access to score values.

Examples

```
import datarobot as dr

# request SHAP matrix calculation
shap_matrix_job = dr.ShapMatrix.create(project_id, model_id, dataset_id)
shap_matrix = shap_matrix_job.get_result_when_complete()

# list available SHAP matrices
shap_matrices = dr.ShapMatrix.list(project_id)
shap_matrix = shap_matrices[0]

# get SHAP matrix as dataframe
shap_matrix_values = shap_matrix.get_as_dataframe()
```

Attributes

project_id [str] id of the project the model belongs to

shap_matrix_id [str] id of the generated SHAP matrix

model_id [str] id of the model used to

dataset_id [str] id of the prediction dataset SHAP values were computed for

classmethod create (*project_id: str, model_id: str, dataset_id: str*) → ShapMatrixJob
Calculate SHAP based prediction explanations against previously uploaded dataset.

Parameters

project_id [str] id of the project the model belongs to

model_id [str] id of the model for which prediction explanations are requested

dataset_id [str] id of the prediction dataset for which prediction explanations are requested (as uploaded from Project.upload_dataset)

Returns

job [ShapMatrixJob] The job computing the SHAP based prediction explanations

Raises

ClientError If the server responded with 4xx status. Possible reasons are project, model or dataset don't exist, user is not allowed or model doesn't support SHAP based prediction explanations

ServerError If the server responded with 5xx status

classmethod list (*project_id: str*) → List[datarobot.models.shap_matrix.ShapMatrix]
Fetch all the computed SHAP prediction explanations for a project.

Parameters

project_id [str] id of the project

Returns

List of ShapMatrix A list of *ShapMatrix* objects

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod get (*project_id: str, id: str*) → datarobot.models.shap_matrix.ShapMatrix
Retrieve the specific SHAP matrix.

Parameters

project_id [str] id of the project the model belongs to

id [str] id of the SHAP matrix

Returns

ShapMatrix object representing specified record

get_as_dataframe (*read_timeout: int = 60*) → pandas.core.frame.DataFrame
Retrieve SHAP matrix values as dataframe.

Returns

dataframe [pandas.DataFrame] A dataframe with SHAP scores

read_timeout [int (optional, default 60)] New in version 2.29.

Wait this many seconds for the server to respond.

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

class `datarobot.models.ClassListMode` (*class_names*)

Calculate prediction explanations for the specified classes in each row.

Attributes

class_names [list] List of class names that will be explained for each dataset row.

get_api_parameters (*batch_route=False*)

Get parameters passed in corresponding API call

Parameters

batch_route [bool] Batch routes describe prediction calls with all possible parameters, so to distinguish explanation parameters from others they have prefix in parameters.

Returns

dict

class `datarobot.models.TopPredictionsMode` (*num_top_classes*)

Calculate prediction explanations for the number of top predicted classes in each row.

Attributes

num_top_classes [int] Number of top predicted classes [1..10] that will be explained for each dataset row.

get_api_parameters (*batch_route=False*)

Get parameters passed in corresponding API call

Parameters

batch_route [bool] Batch routes describe prediction calls with all possible parameters, so to distinguish explanation parameters from others they have prefix in parameters.

Returns

dict

2.3.41 Predictions

class `datarobot.models.Predictions` (*project_id: str, prediction_id: str, model_id: Optional[str] = None, dataset_id: Optional[str] = None, includes_prediction_intervals: Optional[bool] = None, prediction_intervals_size: Optional[int] = None, forecast_point: Optional[datetime] = None, predictions_start_date: Optional[datetime] = None, predictions_end_date: Optional[datetime] = None, actual_value_column: Optional[str] = None, explanation_algorithm: Optional[str] = None, max_explanations: Optional[int] = None, shap_warnings: Optional[ShapWarnings] = None*)

Represents predictions metadata and provides access to prediction results.

Examples

List all predictions for a project

```
import datarobot as dr

# Fetch all predictions for a project
all_predictions = dr.Predictions.list(project_id)

# Inspect all calculated predictions
for predictions in all_predictions:
    print(predictions) # repr includes project_id, model_id, and dataset_id
```

Retrieve predictions by id

```
import datarobot as dr

# Getting predictions by id
predictions = dr.Predictions.get(project_id, prediction_id)

# Dump actual predictions
df = predictions.get_all_as_dataframe()
print(df)
```

Attributes

project_id [str] id of the project the model belongs to

model_id [str] id of the model

prediction_id [str] id of generated predictions

includes_prediction_intervals [bool, optional] (New in v2.16) For *time series* projects only. Indicates if prediction intervals will be part of the response. Defaults to False.

prediction_intervals_size [int, optional] (New in v2.16) For *time series* projects only. Indicates the percentile used for prediction intervals calculation. Will be present only if *includes_prediction_intervals* is True.

forecast_point [datetime.datetime, optional] (New in v2.20) For *time series* projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the *time series prediction documentation* for more information.

predictions_start_date [datetime.datetime or None, optional] (New in v2.20) For *time series* projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_end_date*. Can't be provided with the *forecast_point* parameter.

predictions_end_date [datetime.datetime or None, optional] (New in v2.20) For *time series* projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with *predictions_start_date*. Can't be provided with the *forecast_point* parameter.

actual_value_column [string, optional] (New in version v2.21) For *time series* unsupervised projects only. Actual value column which was used to calculate the classification metrics and insights on the prediction dataset. Can't be provided with the *forecast_point* parameter.

explanation_algorithm [datarobot.enums.EXPLANATIONS_ALGORITHM, optional] (New in version v2.21) If set to 'shap', the response will include prediction explanations

based on the SHAP explainer (SHapley Additive exPlanations). Defaults to null (no prediction explanations).

max_explanations [int, optional] (New in version v2.21) The maximum number of explanation values that should be returned for each row, ordered by absolute value, greatest to least. If null, no limit. In the case of `shap`: if the number of features is greater than the limit, the sum of remaining values will also be returned as `shapRemainingTotal`. Defaults to null. Cannot be set if `explanation_algorithm` is omitted.

shap_warnings [dict, optional] (New in version v2.21) Will be present if `explanation_algorithm` was set to `datarobot.enums.EXPLANATIONS_ALGORITHM.SHAP` and there were additivity failures during SHAP values calculation.

classmethod list (*project_id*: str, *model_id*: Optional[str] = None, *dataset_id*: Optional[str] = None) → List[datarobot.models.predictions.Predictions]
Fetch all the computed predictions metadata for a project.

Parameters

project_id [str] id of the project

model_id [str, optional] if specified, only predictions metadata for this model will be retrieved

dataset_id [str, optional] if specified, only predictions metadata for this dataset will be retrieved

Returns

A list of [py:class:Predictions <datarobot.models.Predictions> objects]

classmethod get (*project_id*: str, *prediction_id*: str) → datarobot.models.predictions.Predictions
Retrieve the specific predictions metadata

Parameters

project_id [str] id of the project the model belongs to

prediction_id [str] id of the prediction set

Returns

Predictions object representing specified

predictions

get_all_as_dataframe (*class_prefix*: str = 'class_', *serializer*: str = 'json') → pandas.core.frame.DataFrame
Retrieve all prediction rows and return them as a pandas.DataFrame.

Parameters

class_prefix [str, optional] The prefix to append to labels in the final dataframe. Default is `class_` (e.g., `apple` -> `class_apple`)

serializer [str, optional] Serializer to use for the download. Options: `json` (default) or `csv`.

Returns

dataframe: pandas.DataFrame

Raises

datarobot.errors.ClientError if the server responded with 4xx status.

datarobot.errors.ServerError if the server responded with 5xx status.

download_to_csv (*filename: Union[str, bool]*, *encoding: str = 'utf-8'*, *serializer: str = 'json'*) → None
Save prediction rows into CSV file.

Parameters

filename [str or file object] path or file object to save prediction rows

encoding [string, optional] A string representing the encoding to use in the output file, defaults to `utf-8`

serializer [str, optional] Serializer to use for the download. Options: `json` (default) or `csv`.

2.3.42 PredictionServer

class `datarobot.PredictionServer` (*id: Optional[str] = None*, *url: Optional[str] = None*, *datarobot_key: Optional[str] = None*)

A prediction server can be used to make predictions.

Attributes

id [str, optional] The id of the prediction server.

url [str] The url of the prediction server.

datarobot_key [str, optional] The `Datarobot-Key` HTTP header used in requests to this prediction server. Note that in the `datarobot.models.Deployment` instance there is the `default_prediction_server` property which has this value as a `kebab-cased` key as opposed to `snake_cased`.

classmethod `list()` → `List[datarobot.models.prediction_server.PredictionServer]`

Returns a list of prediction servers a user can use to make predictions.

New in version v2.17.

Returns

prediction_servers [list of PredictionServer instances] Contains a list of prediction servers that can be used to make predictions.

Examples

```
prediction_servers = PredictionServer.list()
prediction_servers
>>> [PredictionServer('https://example.com')]
```

2.3.43 PrimeFile

class `datarobot.models.PrimeFile` (*id: Optional[str] = None*, *project_id: Optional[str] = None*, *parent_model_id: Optional[str] = None*, *model_id: Optional[str] = None*, *ruleset_id: Optional[int] = None*, *language: Optional[str] = None*, *is_valid: Optional[bool] = None*)

Represents an executable file available for download of the code for a DataRobot Prime model

Attributes

id [str] the id of the PrimeFile

project_id [str] the id of the project this PrimeFile belongs to

parent_model_id [str] the model being approximated by this PrimeFile

model_id [str] the prime model this file represents

ruleset_id [int] the ruleset being used in this PrimeFile

language [str] the language of the code in this file - see enums.LANGUAGE for possibilities

is_valid [bool] whether the code passed basic validation

download (*filepath: str*) → None

Download the code and save it to a file

Parameters

filepath: string the location to save the file to

2.3.44 Project

```
class datarobot.models.Project (id: Optional[str] = None, project_name: Optional[str] = None, mode=None, target: Optional[str] = None, target_type: Optional[str] = None, holdout_unlocked: Optional[bool] = None, metric: Optional[str] = None, stage: Optional[str] = None, partition: Optional[Dict[str, Any]] = None, positive_class: Optional[Union[int, float, str]] = None, created: Optional[str] = None, advanced_options=None, max_train_pct: Optional[float] = None, max_train_rows: Optional[int] = None, file_name: Optional[str] = None, credentials=None, feature_engineering_prediction_point: Optional[str] = None, unsupervised_mode: Optional[bool] = None, use_feature_discovery: Optional[bool] = None, relationships_configuration_id: Optional[str] = None, project_description: Optional[str] = None, query_generator_id: Optional[str] = None, segmentation: Optional[SegmentationDict] = None, partitioning_method=None, catalog_id: Optional[str] = None, catalog_version_id: Optional[str] = None)
```

A project built from a particular training dataset

Attributes

id [str] the id of the project

project_name [str] the name of the project

project_description [str] an optional description for the project

mode [int] The current autopilot mode. 0: Full Autopilot. 2: Manual Mode. 4: Comprehensive Autopilot. null: Mode not set.

target [str] the name of the selected target features

target_type [str] Indicating what kind of modeling is being done in this project Options are: "Regression", "Binary" (Binary classification), "Multiclass" (Multiclass classification), "Multilabel" (Multilabel classification)

holdout_unlocked [bool] whether the holdout has been unlocked

metric [str] the selected project metric (e.g. *LogLoss*)

stage [str] the stage the project has reached - one of `datarobot.enums.PROJECT_STAGE`

partition [dict] information about the selected partitioning options

positive_class [str] for binary classification projects, the selected positive class; otherwise, None

created [datetime] the time the project was created

advanced_options [AdvancedOptions] information on the advanced options that were selected for the project settings, e.g. a weights column or a cap of the runtime of models that can advance autopilot stages

max_train_pct [float] The maximum percentage of the project dataset that can be used without going into the validation data or being too large to submit any blueprint for training

max_train_rows [int] the maximum number of rows that can be trained on without going into the validation data or being too large to submit any blueprint for training

file_name [str] The name of the file uploaded for the project dataset

credentials [list, optional] A list of credentials for the datasets used in relationship configuration (previously graphs). For Feature Discovery projects, the list must be formatted in dictionary record format. Provide the *catalogVersionId* and *credentialId* for each dataset that is to be used in the project that requires authentication.

feature_engineering_prediction_point [str, optional] For time-aware Feature Engineering, this parameter specifies the column from the primary dataset to use as the prediction point.

unsupervised_mode [bool, optional] (New in version v2.20) defaults to False, indicates whether this is an unsupervised project.

relationships_configuration_id [str, optional] (New in version v2.21) id of the relationships configuration to use

query_generator_id: str, optional (New in version v2.27) id of the query generator applied for time series data prep

segmentation [dict, optional] information on the segmentation options for segmented project

partitioning_method [PartitioningMethod, optional] (New in version v3.0) The partitioning class for this project. This attribute should only be used with newly-created projects and before calling *Project.analyze_and_model()*. After the project has been aimed, see *Project.partition* for actual partitioning options.

catalog_id [str] (New in version v3.0) ID of the dataset used during creation of the project.

catalog_version_id [str] (New in version v3.0) The object ID of the *catalog_version* which the project's dataset belongs to.

set_options (*options: Optional[datarobot.helpers.AdvancedOptions] = None, **kwargs*) → None
Update the advanced options of this project.

Either accepts an AdvancedOptions object or individual keyword arguments. This is an inplace update.

Raises

ValueError Raised if an object passed to the *options* parameter is not an *AdvancedOptions* instance, a valid keyword argument from the *AdvancedOptions* class, or a combination of an *AdvancedOptions* instance AND keyword arguments.

get_options () → *datarobot.helpers.AdvancedOptions*
Return the stored advanced options for this project.

Returns**AdvancedOptions**

classmethod `get` (*project_id: str*) → TProject
Gets information about a project.

Parameters

project_id [str] The identifier of the project you want to load.

Returns

project [Project] The queried project

Examples

```
import datarobot as dr
p = dr.Project.get(project_id='54e639a18bd88f08078ca831')
p.id
>>>'54e639a18bd88f08078ca831'
p.project_name
>>>'Some project name'
```

classmethod `create` (*sourcedata*, *project_name='Untitled Project'*, *max_wait=600*,
read_timeout=600, *dataset_filename=None*)

Creates a project with provided data.

Project creation is asynchronous process, which means that after initial request we will keep polling status of async process that is responsible for project creation until it's finished. For SDK users this only means that this method might raise exceptions related to its async nature.

Parameters

sourcedata [basestring, file, pathlib.Path or pandas.DataFrame] Dataset to use for the project. If string can be either a path to a local file, url to publicly available file or raw file content. If using a file, the filename must consist of ASCII characters only.

project_name [str, unicode, optional] The name to assign to the empty project.

max_wait [int, optional] Time in seconds after which project creation is considered unsuccessful

read_timeout: int The maximum number of seconds to wait for the server to respond indicating that the initial upload is complete

dataset_filename [string or None, optional] (New in version v2.14) File name to use for dataset. Ignored for url and file path sources.

Returns

project [Project] Instance with initialized data.

Raises

InputNotUnderstoodError Raised if *sourcedata* isn't one of supported types.

AsyncFailureError Polling for status of async process resulted in response with unsupported status code. Beginning in version 2.1, this will be ProjectAsyncFailureError, a subclass of AsyncFailureError

AsyncProcessUnsuccessfulError Raised if project creation was unsuccessful

AsyncTimeoutError Raised if project creation took more time, than specified by `max_wait` parameter

Examples

```
p = Project.create('/home/datasets/somedataset.csv',
                  project_name="New API project")
p.id
>>> '5921731dkqshda8yd28h'
p.project_name
>>> 'New API project'
```

classmethod encrypted_string (*plaintext: str*) → str

Sends a string to DataRobot to be encrypted

This is used for passwords that DataRobot uses to access external data sources

Parameters

plaintext [str] The string to encrypt

Returns

ciphertext [str] The encrypted string

classmethod create_from_hdfs (*url: str, port: Optional[int] = None, project_name: Optional[str] = None, max_wait: int = 600*)

Create a project from a datasource on a WebHDFS server.

Parameters

url [str] The location of the WebHDFS file, both server and full path. Per the DataRobot specification, must begin with `hdfs://`, e.g. `hdfs:///tmp/10kDiabetes.csv`

port [int, optional] The port to use. If not specified, will default to the server default (50070)

project_name [str, optional] A name to give to the project

max_wait [int] The maximum number of seconds to wait before giving up.

Returns

Project

Examples

```
p = Project.create_from_hdfs('hdfs:///tmp/somedataset.csv',
                             project_name="New API project")
p.id
>>> '5921731dkqshda8yd28h'
p.project_name
>>> 'New API project'
```

classmethod create_from_data_source (*data_source_id: str, username: Optional[str] = None, password: Optional[str] = None, credential_id: Optional[str] = None, use_kerberos: Optional[bool] = None, credential_data: Optional[dict[str, Any]] = None, project_name: Optional[str] = None, max_wait: int = 600*) → TProject

Create a project from a data source. Either `data_source` or `data_source_id` should be specified.

Parameters

- data_source_id** [str] the identifier of the data source.
- username** [str, optional] The username for database authentication. If supplied `password` must also be supplied.
- password** [str, optional] The password for database authentication. The password is encrypted at server side and never saved / stored. If supplied `username` must also be supplied.
- credential_id: str, optional** The ID of the set of credentials to use instead of user and password. Note that with this change, `username` and `password` will become optional.
- use_kerberos: bool, optional** Server default is False. If true, use kerberos authentication for database authentication.
- credential_data: dict, optional** The credentials to authenticate with the database, to use instead of user/password or credential ID.
- project_name** [str, optional] optional, a name to give to the project.
- max_wait** [int] optional, the maximum number of seconds to wait before giving up.

Returns

Project

Raises

InvalidUsageError Raised if either `username` or `password` is passed without the other.

```
classmethod create_from_dataset (dataset_id: str, dataset_version_id: Optional[str] = None, project_name: Optional[str] = None, user: Optional[str] = None, password: Optional[str] = None, credential_id: Optional[str] = None, use_kerberos: Optional[bool] = None, credential_data: Optional[Dict[str, str]] = None, max_wait: int = 600) → TProject
```

Create a Project from a `datarobot.models.Dataset`

Parameters

- dataset_id: string** The ID of the dataset entry to user for the project's Dataset
- dataset_version_id: string, optional** The ID of the dataset version to use for the project dataset. If not specified - uses latest version associated with `dataset_id`
- project_name: string, optional** The name of the project to be created. If not specified, will be "Untitled Project" for database connections, otherwise the project name will be based on the file used.
- user: string, optional** The username for database authentication.
- password: string, optional** The password (in cleartext) for database authentication. The password will be encrypted on the server side in scope of HTTP request and never saved or stored
- credential_id: string, optional** The ID of the set of credentials to use instead of user and password.
- use_kerberos: bool, optional** Server default is False. If true, use kerberos authentication for database authentication.

credential_data: dict, optional The credentials to authenticate with the database, to use instead of user/password or credential ID.

max_wait: int optional, the maximum number of seconds to wait before giving up.

Returns

Project

```
classmethod create_segmented_project_from_clustering_model (clustering_project_id:
    str, clustering_model_id:
    str, target: str,
    max_wait: int
    = 600) →
    TProject
```

Create a new segmented project from a clustering model

Parameters

clustering_project_id [str] The identifier of the clustering project you want to use as the base.

clustering_model_id [str] The identifier of the clustering model you want to use as the segmentation method.

target [str] The name of the target column that will be used from the clustering project.

max_wait: int optional, the maximum number of seconds to wait before giving up.

Returns

project [Project] The created project

```
classmethod from_async (async_location: str, max_wait: int = 600) → TProject
```

Given a temporary async status location poll for no more than max_wait seconds until the async process (project creation or setting the target, for example) finishes successfully, then return the ready project

Parameters

async_location [str] The URL for the temporary async status resource. This is returned as a header in the response to a request that initiates an async process

max_wait [int] The maximum number of seconds to wait before giving up.

Returns

project [Project] The project, now ready

Raises

ProjectAsyncFailureError If the server returned an unexpected response while polling for the asynchronous operation to resolve

AsyncProcessUnsuccessfulError If the final result of the asynchronous operation was a failure

AsyncTimeoutError If the asynchronous operation did not resolve within the time specified

```
classmethod start (sourcedata: Union[str, pandas.core.frame.DataFrame], target: Optional[str] = None, project_name: str = 'Untitled Project', worker_count: Optional[int] = None, metric: Optional[str] = None, autopilot_on: bool = True, blueprint_threshold: Optional[int] = None, response_cap: Optional[float] = None, partitioning_method: Optional[datarobot.helpers.partitioning_methods.PartitioningMethod] = None, positive_class: Union[int, float, str, None] = None, target_type: Optional[str] = None, unsupervised_mode: bool = False, blend_best_models: Optional[bool] = None, prepare_model_for_deployment: Optional[bool] = None, consider_blenders_in_recommendation: Optional[bool] = None, scoring_code_only: Optional[bool] = None, min_secondary_validation_model_count: Optional[int] = None, shap_only_mode: Optional[bool] = None, relationships_configuration_id: Optional[str] = None, autopilot_with_feature_discovery: Optional[bool] = None, feature_discovery_supervised_feature_reduction: Optional[bool] = None, unsupervised_type: Optional[datarobot.enums.UnsupervisedTypeEnum] = None, autopilot_cluster_list: Optional[List[int]] = None, bias_mitigation_feature_name: Optional[str] = None, bias_mitigation_technique: Optional[str] = None, include_bias_mitigation_feature_as_predictor_variable: Optional[bool] = None) → TProject
```

Chain together project creation, file upload, and target selection.

Note: While this function provides a simple means to get started, it does not expose all possible parameters. For advanced usage, using `create`, `set_advanced_options` and `analyze_and_model` directly is recommended.

Parameters

sourcedata [str or pandas.DataFrame] The path to the file to upload. Can be either a path to a local file or a publicly accessible URL (starting with `http://`, `https://`, `file://`, or `s3://`). If the source is a DataFrame, it will be serialized to a temporary buffer. If using a file, the filename must consist of ASCII characters only.

target [str, optional] The name of the target column in the uploaded file. Should not be provided if `unsupervised_mode` is `True`.

project_name [str] The project name.

Returns

project [Project] The newly created and initialized project.

Other Parameters

worker_count [int, optional] The number of workers that you want to allocate to this project.

metric [str, optional] The name of metric to use.

autopilot_on [boolean, default `True`] Whether or not to begin modeling automatically.

blueprint_threshold [int, optional] Number of hours the model is permitted to run. Minimum 1

response_cap [float, optional] Quantile of the response distribution to use for response capping. Must be in range 0.5 .. 1.0

partitioning_method [PartitioningMethod object, optional] Instance of one of the *Partition Classes* defined in `datarobot.helpers.partitioning_methods`. As an alternative, use `Project.set_partitioning_method` or `Project.set_datetime_partitioning` to set the partitioning for the project.

positive_class [str, float, or int; optional] Specifies a level of the target column that should be treated as the positive class for binary classification. May only be specified for binary classification targets.

target_type [str, optional] Override the automatically selected `target_type`. An example usage would be setting the `target_type='Multiclass'` when you want to preform a multiclass classification task on a numeric column that has a low cardinality. You can use `TARGET_TYPE` enum.

unsupervised_mode [boolean, default `False`] Specifies whether to create an unsupervised project.

blend_best_models: bool, optional blend best models during Autopilot run

scoring_code_only: bool, optional Keep only models that can be converted to scorable java code during Autopilot run.

shap_only_mode: bool, optional Keep only models that support SHAP values during Autopilot run. Use SHAP-based insights wherever possible. Defaults to `False`.

prepare_model_for_deployment: bool, optional Prepare model for deployment during Autopilot run. The preparation includes creating reduced feature list models, retraining best model on higher sample size, computing insights and assigning `RECOMMENDED FOR DEPLOYMENT` label.

consider_blenders_in_recommendation: bool, optional Include blenders when selecting a model to prepare for deployment in an Autopilot Run. Defaults to `False`.

min_secondary_validation_model_count: int, optional Compute `backtest` scores (datetime models) or cross validation scores for the specified number of highest ranking models on the Leaderboard, if over the Autopilot default.

relationships_configuration_id [str, optional] (New in version v2.23) id of the relationships configuration to use

autopilot_with_feature_discovery: bool, optional. (New in version v2.23) If true, autopilot will run on a feature list that includes features found via search for interactions.

feature_discovery_supervised_feature_reduction: bool, optional (New in version v2.23) Run supervised feature reduction for feature discovery projects.

unsupervised_type [UnsupervisedTypeEnum, optional] (New in version v2.27) Specifies whether an unsupervised project is anomaly detection or clustering.

autopilot_cluster_list [list(int), optional] (New in version v2.27) Specifies the list of clusters to build for each model during Autopilot. Specifying multiple values in a list will build models with each number of clusters for the Leaderboard.

bias_mitigation_feature_name [str, optional] The feature from protected features that will be used in a bias mitigation task to mitigate bias

bias_mitigation_technique [str, optional] One of `datarobot.enums.BiasMitigationTechnique` Options: - `preprocessingReweighting` - `postProcessingRejectionOptionBasedClassification` The technique by which we'll mitigate bias, which will inform which bias mitigation task we insert into blueprints

include_bias_mitigation_feature_as_predictor_variable [bool, optional] Whether we should also use the mitigation feature as in input to the modeler just like any other categorical used for training, i.e. do we want the model to train on this feature in addition to using it for bias mitigation

Raises

AsyncFailureError Polling for status of async process resulted in response with unsupported status code

AsyncProcessUnsuccessfulError Raised if project creation or target setting was unsuccessful

AsyncTimeoutError Raised if project creation or target setting timed out

Examples

```
Project.start("./tests/fixtures/file.csv",
              "a_target",
              project_name="test_name",
              worker_count=4,
              metric="a_metric")
```

This is an example of using a URL to specify the datasource:

```
Project.start("https://example.com/data/file.csv",
              "a_target",
              project_name="test_name",
              worker_count=4,
              metric="a_metric")
```

classmethod list (*search_params*: *Optional[Dict[str, str]]* = *None*) → *List[datarobot.models.project.Project]*

Returns the projects associated with this account.

Parameters

search_params [dict, optional.] If not *None*, the returned projects are filtered by lookup. Currently you can query projects by:

- `project_name`

Returns

projects [list of Project instances] Contains a list of projects associated with this user account.

Raises

TypeError Raised if `search_params` parameter is provided, but is not of supported type.

Examples

List all projects .. code-block:: python

```
p_list = Project.list() p_list >>> [Project('Project One'), Project('Project Two')]
```

Search for projects by name .. code-block:: python

```
Project.list(search_params={'project_name': 'Fred'}) >>>
[Project('Fred Project'), Project('Fred Project')]
```

refresh() → None

Fetches the latest state of the project, and updates this object with that information. This is an in place update, not a new object.

Returns

self [Project] the now-updated project

delete() → None

Removes this project from your account.

analyze_and_model (*target=None, mode='quick', metric=None, worker_count=None, positive_class=None, partitioning_method=None, featurelist_id=None, advanced_options=None, max_wait=600, target_type=None, credentials=None, feature_engineering_prediction_point=None, unsupervised_mode=False, relationships_configuration_id=None, class_mapping_aggregation_settings=None, segmentation_task_id=None, unsupervised_type=None, autopilot_cluster_list=None*)

Set target variable of an existing project and begin the autopilot process or send data to DataRobot for feature analysis only if manual mode is specified.

Any options saved using `set_options` will be used if nothing is passed to `advanced_options`. However, saved options will be ignored if `advanced_options` are passed.

Target setting is an asynchronous process, which means that after initial request we will keep polling status of async process that is responsible for target setting until it's finished. For SDK users this only means that this method might raise exceptions related to it's async nature.

When execution returns to the caller, the autopilot process will already have commenced (again, unless manual mode is specified).

Parameters

target [str, optional] The name of the target column in the uploaded file. Should not be provided if `unsupervised_mode` is True.

mode [str, optional] You can use `AUTOPILOT_MODE` enum to choose between

- `AUTOPILOT_MODE.FULL_AUTO`
- `AUTOPILOT_MODE.MANUAL`
- `AUTOPILOT_MODE.QUICK`
- `AUTOPILOT_MODE.COMPREHENSIVE`: Runs all blueprints in the repository (warning: this may be extremely slow).

If unspecified, `QUICK` is used. If the `MANUAL` value is used, the model creation process will need to be started by executing the `start_autopilot` function with the desired featurelist. It will start immediately otherwise.

metric [str, optional] Name of the metric to use for evaluating models. You can query the metrics available for the target by way of `Project.get_metrics`. If none is specified, then the default recommended by DataRobot is used.

worker_count [int, optional] The number of concurrent workers to request for this project. If `None`, then the default is used. (New in version v2.14) Setting this to -1 will request the maximum number available to your account.

partitioning_method [PartitioningMethod object, optional] Instance of one of the *Partition Classes* defined in `datarobot.helpers.partitioning_methods`. As an alternative, use `Project.set_partitioning_method` or `Project.set_datetime_partitioning` to set the partitioning for the project.

positive_class [str, float, or int; optional] Specifies a level of the target column that should be treated as the positive class for binary classification. May only be specified for binary classification targets.

featurelist_id [str, optional] Specifies which feature list to use.

advanced_options [AdvancedOptions, optional] Used to set advanced options of project creation. Will override any options saved using `set_options`.

max_wait [int, optional] Time in seconds after which target setting is considered unsuccessful.

target_type [str, optional] Override the automatically selected `target_type`. An example usage would be setting the `target_type='Multiclass'` when you want to preform a multiclass classification task on a numeric column that has a low cardinality. You can use `TARGET_TYPE` enum.

credentials: list, optional, a list of credentials for the datasets used in relationship configuration (previously graphs).

feature_engineering_prediction_point [str, optional] additional aim parameter.

unsupervised_mode [boolean, default `False`] (New in version v2.20) Specifies whether to create an unsupervised project. If `True`, `target` may not be provided.

relationships_configuration_id [str, optional] (New in version v2.21) ID of the relationships configuration to use.

segmentation_task_id [str or SegmentationTask, optional] (New in version v2.28) The segmentation task that should be used to split the project for segmented modeling.

unsupervised_type [UnsupervisedTypeEnum, optional] (New in version v2.27) Specifies whether an unsupervised project is anomaly detection or clustering.

autopilot_cluster_list [list(int), optional] (New in version v2.27) Specifies the list of clusters to build for each model during Autopilot. Specifying multiple values in a list will build models with each number of clusters for the Leaderboard.

Returns

project [Project] The instance with updated attributes.

Raises

AsyncFailureError Polling for status of async process resulted in response with unsupported status code

AsyncProcessUnsuccessfulError Raised if target setting was unsuccessful

AsyncTimeoutError Raised if target setting took more time, than specified by `max_wait` parameter

TypeError Raised if `advanced_options`, `partitioning_method` or `target_type` is provided, but is not of supported type

See also:

[*`datarobot.models.Project.start`*](#) combines project creation, file upload, and target selection. Provides fewer options, but is useful for getting started quickly.

set_target (*target=None, mode='quick', metric=None, worker_count=None, positive_class=None, partitioning_method=None, featurelist_id=None, advanced_options=None, max_wait=600, target_type=None, credentials=None, feature_engineering_prediction_point=None, unsupervised_mode=False, relationships_configuration_id=None, class_mapping_aggregation_settings=None, segmentation_task_id=None, unsupervised_type=None, autopilot_cluster_list=None*)

Set target variable of an existing project and begin the Autopilot process (unless manual mode is specified).

Target setting is an asynchronous process, which means that after initial request DataRobot keeps polling status of an async process that is responsible for target setting until it's finished. For SDK users, this method might raise exceptions related to its async nature.

When execution returns to the caller, the Autopilot process will already have commenced (again, unless manual mode is specified).

Parameters

target [str, optional] The name of the target column in the uploaded file. Should not be provided if `unsupervised_mode` is `True`.

mode [str, optional] You can use `AUTOPILOT_MODE` enum to choose between

- `AUTOPILOT_MODE.FULL_AUTO`
- `AUTOPILOT_MODE.MANUAL`
- `AUTOPILOT_MODE.QUICK`
- `AUTOPILOT_MODE.COMPREHENSIVE`: Runs all blueprints in the repository (warning: this may be extremely slow).

If unspecified, `QUICK` mode is used. If the `MANUAL` value is used, the model creation process needs to be started by executing the `start_autopilot` function with the desired feature list. It will start immediately otherwise.

metric [str, optional] Name of the metric to use for evaluating models. You can query the metrics available for the target by way of `Project.get_metrics`. If none is specified, then the default recommended by DataRobot is used.

worker_count [int, optional] The number of concurrent workers to request for this project. If `None`, then the default is used. (New in version v2.14) Setting this to -1 will request the maximum number available to your account.

positive_class [str, float, or int; optional] Specifies a level of the target column that should be treated as the positive class for binary classification. May only be specified for binary classification targets.

partitioning_method [PartitioningMethod object, optional] Instance of one of the *Partition Classes* defined in `datarobot.helpers.partitioning_methods`. As an alternative, use `Project.set_partitioning_method` or `Project.set_datetime_partitioning` to set the partitioning for the project.

featurelist_id [str, optional] Specifies which feature list to use.

advanced_options [AdvancedOptions, optional] Used to set advanced options of project creation.

max_wait [int, optional] Time in seconds after which target setting is considered unsuccessful.

target_type [str, optional] Override the automatically selected `target_type`. An example usage would be setting the `target_type=Multiclass` when you want to perform a mul-

ticlass classification task on a numeric column that has a low cardinality. You can use ‘TARGET_TYPE’ enum.

credentials: `list, optional`, A list of credentials for the datasets used in relationship configuration (previously graphs).

feature_engineering_prediction_point [`str, optional`] For time-aware Feature Engineering, this parameter specifies the column from the primary dataset to use as the prediction point.

unsupervised_mode [`boolean, default False`] (New in version v2.20) Specifies whether to create an unsupervised project. If `True`, `target` may not be provided.

relationships_configuration_id [`str, optional`] (New in version v2.21) ID of the relationships configuration to use.

class_mapping_aggregation_settings [`ClassMappingAggregationSettings, optional`] Instance of `datarobot.helpers.ClassMappingAggregationSettings`

segmentation_task_id [`str or SegmentationTask, optional`] (New in version v2.28) The segmentation task that should be used to split the project for segmented modeling.

unsupervised_type [`UnsupervisedTypeEnum, optional`] (New in version v2.27) Specifies whether an unsupervised project is anomaly detection or clustering.

autopilot_cluster_list [`list(int), optional`] (New in version v2.27) Specifies the list of clusters to build for each model during Autopilot. Specifying multiple values in a list will build models with each number of clusters for the Leaderboard.

Returns

project [`Project`] The instance with updated attributes.

Raises

AsyncFailureError Polling for status of async process resulted in response with unsupported status code.

AsyncProcessUnsuccessfulError Raised if target setting was unsuccessful.

AsyncTimeoutError Raised if target setting took more time, than specified by `max_wait` parameter.

TypeError Raised if `advanced_options`, `partitioning_method` or `target_type` is provided, but is not of supported type.

See also:

[`datarobot.models.Project.start`](#) Combines project creation, file upload, and target selection. Provides fewer options, but is useful for getting started quickly.

[`datarobot.models.Project.analyze_and_model`](#) the method replacing `set_target` after it is removed.

get_models (`order_by: Union[str, List[str], None] = None, search_params: Optional[Dict[str, Any]] = None, with_metric: Optional[str] = None`) → `List[Optional[datarobot.models.model.Model]]`

List all completed, successful models in the leaderboard for the given project.

Parameters

order_by [`str or list of strings, optional`] If not `None`, the returned models are ordered by this attribute. If `None`, the default return is the order of default project metric.

Allowed attributes to sort by are:

- `metric`
- `sample_pct`

If the sort attribute is preceded by a hyphen, models will be sorted in descending order, otherwise in ascending order.

Multiple sort attributes can be included as a comma-delimited string or in a list e.g. `order_by='sample_pct,-metric'` or `order_by=[sample_pct, -metric]`

Using *metric* to sort by will result in models being sorted according to their validation score by how well they did according to the project metric.

search_params [dict, optional.] If not *None*, the returned models are filtered by lookup. Currently you can query models by:

- `name`
- `sample_pct`
- `is_starred`

with_metric [str, optional.] If not *None*, the returned models will only have scores for this metric. Otherwise all the metrics are returned.

Returns

models [a list of Model instances.] All of the models that have been trained in this project.

Raises

TypeError Raised if `order_by` or `search_params` parameter is provided, but is not of supported type.

Examples

```
Project.get('pid').get_models(order_by=['-sample_pct',
                                       'metric'])

# Getting models that contain "Ridge" in name
# and with sample_pct more than 64
Project.get('pid').get_models(
    search_params={
        'sample_pct__gt': 64,
        'name': "Ridge"
    })

# Filtering models based on 'starred' flag:
Project.get('pid').get_models(search_params={'is_starred': True})
```

recommended_model () → Optional[datarobot.models.model.Model]

Returns the default recommended model, or None if there is no default recommended model.

Returns

recommended_model [Model or None] The default recommended model.

get_top_model (*metric: Optional[str] = None*) → datarobot.models.model.Model

Obtain the top ranked model for a given metric/ If no metric is passed in, it uses the project's default metric. Models that display score of N/A in the UI are not included in the ranking (see <https://docs.datarobot.com/en/docs/modeling/reference/model-detail/leaderboard-ref.html#na-scores>).

Parameters

metric [str, optional] Metric to sort models

Returns

model [Model] The top model

Raises

ValueError Raised if the project is unsupervised. Raised if the project has no target set. Raised if no metric was passed or the project has no metric. Raised if the metric passed is not used by the models on the leaderboard.

Examples

```
from datarobot.models.project import Project

project = Project.get("<MY_PROJECT_ID>")
top_model = project.get_top_model()
```

get_datetime_models () → List[datarobot.models.model.DatetimeModel]

List all models in the project as DatetimeModels

Requires the project to be datetime partitioned. If it is not, a ClientError will occur.

Returns

models [list of DatetimeModel] the datetime models

get_prime_models () → List[datarobot.models.model.PrimeModel]

List all DataRobot Prime models for the project Prime models were created to approximate a parent model, and have downloadable code.

Returns

models [list of PrimeModel]

get_prime_files (*parent_model_id=None, model_id=None*)

List all downloadable code files from DataRobot Prime for the project

Parameters

parent_model_id [str, optional] Filter for only those prime files approximating this parent model

model_id [str, optional] Filter for only those prime files with code for this prime model

Returns

files: list of PrimeFile

get_dataset () → Optional[Dataset]

Retrieve the dataset used to create a project.

Returns

Dataset Dataset used for creation of project or None if no `catalog_id` present.

Examples

```
from datarobot.models.project import Project

project = Project.get("<MY_PROJECT_ID>")
dataset = project.get_dataset()
```

get_datasets() → List[datarobot.models.prediction_dataset.PredictionDataset]

List all the datasets that have been uploaded for predictions

Returns

datasets [list of PredictionDataset instances]

upload_dataset (*sourcedata*, *max_wait*=600, *read_timeout*=600, *forecast_point*=None, *predictions_start_date*=None, *predictions_end_date*=None, *dataset_filename*=None, *relax_known_in_advance_features_check*=None, *credentials*=None, *actual_value_column*=None, *secondary_datasets_config_id*=None)

Upload a new dataset to make predictions against

Parameters

sourcedata [str, file or pandas.DataFrame] Data to be used for predictions. If string, can be either a path to a local file, a publicly accessible URL (starting with `http://`, `https://`, `file://`), or raw file content. If using a file on disk, the filename must consist of ASCII characters only.

max_wait [int, optional] The maximum number of seconds to wait for the uploaded dataset to be processed before raising an error.

read_timeout [int, optional] The maximum number of seconds to wait for the server to respond indicating that the initial upload is complete

forecast_point [datetime.datetime or None, optional] (New in version v2.8) May only be specified for time series projects, otherwise the upload will be rejected. The time in the dataset relative to which predictions should be generated in a time series project. See the [Time Series documentation](#) for more information. If not provided, will default to using the latest forecast point in the dataset.

predictions_start_date [datetime.datetime or None, optional] (New in version v2.11) May only be specified for time series projects. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with `predictions_end_date`. Cannot be provided with the `forecast_point` parameter.

predictions_end_date [datetime.datetime or None, optional] (New in version v2.11) May only be specified for time series projects. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with `predictions_start_date`. Cannot be provided with the `forecast_point` parameter.

actual_value_column [string, optional] (New in version v2.21) Actual value column name, valid for the prediction files if the project is unsupervised and the dataset is considered as bulk predictions dataset. Cannot be provided with the `forecast_point` parameter.

dataset_filename [string or None, optional] (New in version v2.14) File name to use for the dataset. Ignored for url and file path sources.

relax_known_in_advance_features_check [bool, optional] (New in version v2.15) For time series projects only. If True, missing values in the known in advance features are

allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

credentials: list, optional, a list of credentials for the datasets used in Feature discovery project

secondary_datasets_config_id: string or None, optional (New in version v2.23) The Id of the alternative secondary dataset config to use during prediction for Feature discovery project.

Returns

•

dataset [PredictionDataset] The newly uploaded dataset.

Raises

InputNotUnderstoodError Raised if `sourcedata` isn't one of supported types.

AsyncFailureError Raised if polling for the status of an async process resulted in a response with an unsupported status code.

AsyncProcessUnsuccessfulError Raised if project creation was unsuccessful (i.e. the server reported an error in uploading the dataset).

AsyncTimeoutError Raised if processing the uploaded dataset took more time than specified by the `max_wait` parameter.

ValueError Raised if `forecast_point` or `predictions_start_date` and `predictions_end_date` are provided, but are not of the supported type.

upload_dataset_from_data_source (`data_source_id`, `username`, `password`, `max_wait=600`, `forecast_point=None`, `relax_known_in_advance_features_check=None`, `credentials=None`, `predictions_start_date=None`, `predictions_end_date=None`, `actual_value_column=None`, `secondary_datasets_config_id=None`)

Upload a new dataset from a data source to make predictions against

Parameters

data_source_id [str] The identifier of the data source.

username [str] The username for database authentication.

password [str] The password for database authentication. The password is encrypted at server side and never saved / stored.

max_wait [int, optional] Optional, the maximum number of seconds to wait before giving up.

forecast_point [datetime.datetime or None, optional] (New in version v2.8) For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series [prediction documentation](#) for more information.

relax_known_in_advance_features_check [bool, optional] (New in version v2.15) For time series projects only. If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

credentials: list, optional, a list of credentials for the datasets used in Feature discovery project

predictions_start_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with `predictions_end_date`. Cannot be provided with the `forecast_point` parameter.

predictions_end_date [datetime.datetime or None, optional] (New in version v2.20) For time series projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with `predictions_start_date`. Cannot be provided with the `forecast_point` parameter.

actual_value_column [string, optional] (New in version v2.21) Actual value column name, valid for the prediction files if the project is unsupervised and the dataset is considered as bulk predictions dataset. Cannot be provided with the `forecast_point` parameter.

secondary_datasets_config_id: string or None, optional (New in version v2.23) The Id of the alternative secondary dataset config to use during prediction for Feature discovery project.

Returns

•

dataset [PredictionDataset] the newly uploaded dataset

```
upload_dataset_from_catalog (dataset_id, dataset_version_id=None,
                               max_wait=600, forecast_point=None, re-
                               lax_known_in_advance_features_check=None, cre-
                               denentials=None, predictions_start_date=None, predic-
                               tions_end_date=None, actual_value_column=None, sec-
                               ondary_datasets_config_id=None)
```

Upload a new dataset from a catalog dataset to make predictions against

Parameters

dataset_id [str] The identifier of the dataset.

dataset_version_id [str, optional] The version id of the dataset to use.

max_wait [int, optional] Optional, the maximum number of seconds to wait before giving up.

forecast_point [datetime.datetime or None, optional] For time series projects only. This is the default point relative to which predictions will be generated, based on the forecast window of the project. See the time series [prediction documentation](#) for more information.

relax_known_in_advance_features_check [bool, optional] For time series projects only. If True, missing values in the known in advance features are allowed in the forecast window at the prediction time. If omitted or False, missing values are not allowed.

credentials: list, optional A list of credentials for the datasets used in Feature discovery project.

predictions_start_date [datetime.datetime or None, optional] For time series projects only. The start date for bulk predictions. Note that this parameter is for generating historical predictions using the training data. This parameter should be provided in conjunction with `predictions_end_date`. Cannot be provided with the `forecast_point` parameter.

predictions_end_date [datetime.datetime or None, optional] For time series projects only. The end date for bulk predictions, exclusive. Note that this parameter is for generat-

ing historical predictions using the training data. This parameter should be provided in conjunction with `predictions_start_date`. Canâ€™t be provided with the `forecast_point` parameter.

actual_value_column [string, optional] Actual value column name, valid for the prediction files if the project is unsupervised and the dataset is considered as bulk predictions dataset. Cannot be provided with the `forecast_point` parameter.

secondary_datasets_config_id: string or None, optional The Id of the alternative secondary dataset config to use during prediction for Feature discovery project.

Returns

dataset [PredictionDataset] the newly uploaded dataset

get_blueprints ()

List all blueprints recommended for a project.

Returns

menu [list of Blueprint instances] All the blueprints recommended by DataRobot for a project

get_features () → List[datarobot.models.feature.Feature]

List all features for this project

Returns

list of Feature all features for this project

get_modeling_features (*batch_size: Optional[int] = None*) → List[datarobot.models.feature.ModelingFeature]

List all modeling features for this project

Only available once the target and partitioning settings have been set. For more information on the distinction between input and modeling features, see the [time series documentation](#).

Parameters

batch_size [int, optional] The number of features to retrieve in a single API call. If specified, the client may make multiple calls to retrieve the full list of features. If not specified, an appropriate default will be chosen by the server.

Returns

list of ModelingFeature All modeling features in this project

get_featurelists () → List[datarobot.models.featurelist.Featurelist]

List all featurelists created for this project

Returns

list of Featurelist All featurelists created for this project

get_associations (*assoc_type, metric, featurelist_id=None*)

Get the association statistics and metadata for a projectâ€™s informative features

New in version v2.17.

Parameters

assoc_type [string or None] The type of association, must be either `association` or `correlation`

metric [string or None] The specified association metric, belongs under either association or correlation umbrella

featurelist_id [string or None] The desired featurelist for which to get association statistics (New in version v2.19)

Returns

association_data [dict] Pairwise metric strength data, feature clustering data, and ordering data for Feature Association Matrix visualization

get_association_featurelists ()

List featurelists and get feature association status for each

New in version v2.19.

Returns

feature_lists [dict] Dict with "featurelists" as key, with list of featurelists as values

get_association_matrix_details (*feature1: str, feature2: str*)

Get a sample of the actual values used to measure the association between a pair of features

New in version v2.17.

Parameters

feature1 [str] Feature name for the first feature of interest

feature2 [str] Feature name for the second feature of interest

Returns

dict This data has 3 keys: `chart_type`, `features`, `values`, and `types`

chart_type [str] Type of plotting the pair of features gets in the UI. e.g. "HORIZONTAL_BOX", "VERTICAL_BOX", "SCATTER" or "CONTINGENCY"

values [list] A list of triplet lists e.g. {values: [[460.0, 428.5, 0.001], [1679.3, 259.0, 0.001], ...]} The first entry of each list is a value of feature1, the second entry of each list is a value of feature2, and the third is the relative frequency of the pair of datapoints in the sample.

features [list of str] A list of the passed features, [feature1, feature2]

types [list of str] A list of the passed features' types inferred by DataRobot. e.g. ["NUMERIC", "CATEGORICAL"]

get_modeling_featurelists (*batch_size: Optional[int] = None*) → List[datarobot.models.featurelist.ModelingFeaturelist]

List all modeling featurelists created for this project

Modeling featurelists can only be created after the target and partitioning options have been set for a project. In time series projects, these are the featurelists that can be used for modeling; in other projects, they behave the same as regular featurelists.

See the [time series documentation](#) for more information.

Parameters

batch_size [int, optional] The number of featurelists to retrieve in a single API call. If specified, the client may make multiple calls to retrieve the full list of features. If not specified, an appropriate default will be chosen by the server.

Returns

list of ModelingFeaturelist all modeling featurelists in this project

get_discarded_features () → datarobot.models.restore_discarded_features.DiscardedFeaturesInfo
Retrieve discarded during feature generation features. Applicable for time series projects. Can be called at the modeling stage.

Returns

discarded_features_info: DiscardedFeaturesInfo

restore_discarded_features (*features:* List[str], *max_wait:* int = 600) → datarobot.models.restore_discarded_features.FeatureRestorationStatus
Restore discarded during feature generation features. Applicable for time series projects. Can be called at the modeling stage.

Returns

status: FeatureRestorationStatus information about features requested to be restored.

create_type_transform_feature (*name:* str, *parent_name:* str, *variable_type:* str, *replacement:* Union[str, float, None] = None, *date_extraction:* Optional[str] = None, *max_wait:* int = 600) → datarobot.models.feature.Feature

Create a new feature by transforming the type of an existing feature in the project

Note that only the following transformations are supported:

1. Text to categorical or numeric
2. Categorical to text or numeric
3. Numeric to categorical
4. Date to categorical or numeric

Note: Special considerations when casting numeric to categorical

There are two parameters which can be used for `variableType` to convert numeric data to categorical levels. These differ in the assumptions they make about the input data, and are very important when considering the data that will be used to make predictions. The assumptions that each makes are:

- `categorical` : The data in the column is all integral, and there are no missing values. If either of these conditions do not hold in the training set, the transformation will be rejected. During predictions, if any of the values in the parent column are missing, the predictions will error.
- `categoricalInt` : **New in v2.6** All of the data in the column should be considered categorical in its string form when cast to an int by truncation. For example the value 3 will be cast as the string 3 and the value 3.14 will also be cast as the string 3. Further, the value -3.6 will become the string -3. Missing values will still be recognized as missing.

For convenience these are represented in the enum `VARIABLE_TYPE_TRANSFORM` with the names `CATEGORICAL` and `CATEGORICAL_INT`.

Parameters

name [str] The name to give to the new feature

parent_name [str] The name of the feature to transform

variable_type [str] The type the new column should have. See the values within `datarobot.enums.VARIABLE_TYPE_TRANSFORM`.

replacement [str or float, optional] The value that missing or unconvertable data should have

date_extraction [str, optional] Must be specified when `parent_name` is a date column (and left None otherwise). Specifies which value from a date should be extracted. See the list of values in `datarobot.enums.DATE_EXTRACTION`

max_wait [int, optional] The maximum amount of time to wait for DataRobot to finish processing the new column. This process can take more time with more data to process. If this operation times out, an `AsyncTimeoutError` will occur. DataRobot continues the processing and the new column may successfully be constructed.

Returns

Feature The data of the new Feature

Raises

AsyncFailureError If any of the responses from the server are unexpected

AsyncProcessUnsuccessfulError If the job being waited for has failed or has been cancelled

AsyncTimeoutError If the resource did not resolve in time

get_featurelist_by_name (*name: str*) → `Optional[datarobot.models.featurelist.Featurelist]`

Creates a new featurelist

Parameters

name [str, optional] The name of the Project's featurelist to get.

Returns

Featurelist featurelist found by name, optional

Examples

```
project = Project.get('5223deadbeefdeadbeef0101')
featurelist = project.get_featurelist_by_name("Raw Features")
```

create_featurelist (*name: Optional[str] = None, features: Optional[List[str]] = None, starting_featurelist: Optional[datarobot.models.featurelist.Featurelist] = None, starting_featurelist_id: Optional[str] = None, starting_featurelist_name: Optional[str] = None, features_to_include: Optional[List[str]] = None, features_to_exclude: Optional[List[str]] = None*) → `datarobot.models.featurelist.Featurelist`

Creates a new featurelist

Parameters

name [str, optional] The name to give to this new featurelist. Names must be unique, so an error will be returned from the server if this name has already been used in this project. We dynamically create a name if none is provided.

features [list of str, optional] The names of the features. Each feature must exist in the project already.

starting_featurelist [Featurelist, optional] The featurelist to use as the basis when creating a new featurelist. `starting_featurelist.features` will be read to get the list of features that we will manipulate.

starting_featurelist_id [str, optional] The featurelist ID used instead of passing an object instance.

starting_featurelist_name [str, optional] The featurelist name like "Informative Features" to find a featurelist via the API, and use to fetch features.

features_to_include [list of str, optional] The list of the feature names to include in new featurelist. Throws an error if an item in this list is not in the featurelist that was passed, or that was retrieved from the API. If nothing is passed, all features are included from the starting featurelist.

features_to_exclude [list of str, optional] The list of the feature names to exclude in the new featurelist. Throws an error if an item in this list is not in the featurelist that was passed, also throws an error if a feature is in this list as well as *features_to_include*. Method cannot use both at the same time.

Returns

Featurelist newly created featurelist

Raises

DuplicateFeaturesError Raised if *features* variable contains duplicate features

InvalidUsageError Raised method is called with incompatible arguments

Examples

```
project = Project.get('5223deadbeefdeadbeef0101')
flists = project.get_featurelists()

# Create a new featurelist using a subset of features from an
# existing featurelist
flist = flists[0]
features = flist.features[::2] # Half of the features

new_flist = project.create_featurelist(
    name='Feature Subset',
    features=features,
)
```

```
project = Project.get('5223deadbeefdeadbeef0101')

# Create a new featurelist using a subset of features from an
# existing featurelist by using features_to_exclude param

new_flist = project.create_featurelist(
    name='Feature Subset of Existing Featurelist',
    starting_featurelist_name="Informative Features",
    features_to_exclude=["metformin", "weight", "age"],
)
```

create_modeling_featurelist (*name*: str, *features*: List[str],
skip_datetime_partition_column: bool = False) →
datarobot.models.featurelist.ModelingFeaturelist

Create a new modeling featurelist

Modeling featurelists can only be created after the target and partitioning options have been set for a project. In time series projects, these are the featurelists that can be used for modeling; in other projects, they behave the same as regular featurelists.

See the [time series documentation](#) for more information.

Parameters

name [str] the name of the modeling featurelist to create. Names must be unique within the project, or the server will return an error.

features [list of str] the names of the features to include in the modeling featurelist. Each feature must be a modeling feature.

skip_datetime_partition_column: boolean, optional False by default. If True, featurelist will not contain datetime partition column. Use to create monotonic feature lists in Time Series projects. Setting makes no difference for not Time Series projects. Monotonic featurelists can not be used for modeling.

Returns

featurelist [ModelingFeaturelist] the newly created featurelist

Examples

```
project = Project.get('1234deadbeeffeeddead4321')
modeling_features = project.get_modeling_features()
selected_features = [feat.name for feat in modeling_features][:5] # select_
↳first five
new_flist = project.create_modeling_featurelist('Model This', selected_
↳features)
```

get_metrics (*feature_name: str*)

Get the metrics recommended for modeling on the given feature.

Parameters

feature_name [str] The name of the feature to query regarding which metrics are recommended for modeling.

Returns

feature_name: str The name of the feature that was looked up

available_metrics: list of str An array of strings representing the appropriate metrics. If the feature cannot be selected as the target, then this array will be empty.

metric_details: list of dict The list of *metricDetails* objects

metric_name: str Name of the metric

supports_timeseries: boolean This metric is valid for timeseries

supports_multiclass: boolean This metric is valid for multiclass classification

supports_binary: boolean This metric is valid for binary classification

supports_regression: boolean This metric is valid for regression

ascending: boolean Should the metric be sorted in ascending order

get_status ()

Query the server for project status.

Returns

status [dict] Contains:

- **autopilot_done**: a boolean.

- `stage`: a short string indicating which stage the project is in.
- `stage_description`: a description of what stage means.

Examples

```
{ "autopilot_done": False,  
  "stage": "modeling",  
  "stage_description": "Ready for modeling" }
```

pause_autopilot () → bool

Pause autopilot, which stops processing the next jobs in the queue.

Returns

paused [boolean] Whether the command was acknowledged

unpause_autopilot () → bool

Unpause autopilot, which restarts processing the next jobs in the queue.

Returns

unpaused [boolean] Whether the command was acknowledged.

start_autopilot (*featurelist_id*: str, *mode*: datarobot.enums.Enum = 'quick', *blend_best_models*: bool = False, *scoring_code_only*: bool = False, *prepare_model_for_deployment*: bool = True, *consider_blenders_in_recommendation*: bool = False, *run_leakage_removed_feature_list*: bool = True, *autopilot_cluster_list*: Optional[List[int]] = None) → None

Start Autopilot on provided featurelist with the specified Autopilot settings, halting the current Autopilot run.

Only one autopilot can be running at the time. That's why any ongoing autopilot on a different featurelist will be halted - modeling jobs in queue would not be affected but new jobs would not be added to queue by the halted autopilot.

Parameters

featurelist_id [str] Identifier of featurelist that should be used for autopilot

mode [str, optional] The Autopilot mode to run. You can use `AUTOPILOT_MODE` enum to choose between

- `AUTOPILOT_MODE.FULL_AUTO`
- `AUTOPILOT_MODE.QUICK`
- `AUTOPILOT_MODE.COMPREHENSIVE`

If unspecified, `AUTOPILOT_MODE.QUICK` is used.

blend_best_models [bool, optional] Blend best models during Autopilot run. This option is not supported in SHAP-only mode.

scoring_code_only [bool, optional] Keep only models that can be converted to scorable java code during Autopilot run.

prepare_model_for_deployment [bool, optional] Prepare model for deployment during Autopilot run. The preparation includes creating reduced feature list models, retraining best model on higher sample size, computing insights and assigning `RECOMMENDED FOR DEPLOYMENT` label.

consider_blenders_in_recommendation [bool, optional] Include blenders when selecting a model to prepare for deployment in an Autopilot Run. This option is not supported in SHAP-only mode or for multilabel projects.

run_leakage_removed_feature_list [bool, optional] Run Autopilot on Leakage Removed feature list (if exists).

autopilot_cluster_list [list of int, optional] (New in v2.27) A list of integers, where each value will be used as the number of clusters in Autopilot model(s) for unsupervised clustering projects. Cannot be specified unless project `unsupervisedMode` is true and `unsupervisedType` is set to `clustering`.

Raises

AppPlatformError Raised project's target was not selected or the settings for Autopilot are invalid for the project project.

train (*trainable*, *sample_pct=None*, *featurelist_id=None*, *source_project_id=None*, *scoring_type=None*, *training_row_count=None*, *monotonic_increasing_featurelist_id=<object object>*, *monotonic_decreasing_featurelist_id=<object object>*, *n_clusters=None*)
Submit a job to the queue to train a model.

Either *sample_pct* or *training_row_count* can be used to specify the amount of data to use, but not both. If neither are specified, a default of the maximum amount of data that can safely be used to train any blueprint without going into the validation data will be selected.

In smart-sampled projects, *sample_pct* and *training_row_count* are assumed to be in terms of rows of the minority class.

Note: If the project uses datetime partitioning, use `Project.train_datetime` instead.

Parameters

trainable [str or Blueprint] For str, this is assumed to be a blueprint_id. If no *source_project_id* is provided, the *project_id* will be assumed to be the project that this instance represents.

Otherwise, for a Blueprint, it contains the *blueprint_id* and *source_project_id* that we want to use. *featurelist_id* will assume the default for this project if not provided, and *sample_pct* will default to using the maximum training value allowed for this project's partition setup. *source_project_id* will be ignored if a Blueprint instance is used for this parameter

sample_pct [float, optional] The amount of data to use for training, as a percentage of the project dataset from 0 to 100.

featurelist_id [str, optional] The identifier of the featurelist to use. If not defined, the default for this project is used.

source_project_id [str, optional] Which project created this blueprint_id. If None, it defaults to looking in this project. Note that you must have read permissions in this project.

scoring_type [str, optional] Either `validation` or `crossValidation` (also `dr.SCORING_TYPE.validation` or `dr.SCORING_TYPE.cross_validation`). `validation` is available for every partitioning type, and indicates that the default model validation should be used for the project. If the project uses a form of cross-validation partitioning, `crossValidation` can also be used to indicate that all of the available training/validation combinations should be used to evaluate the model.

training_row_count [int, optional] The number of rows to use to train the requested model.

monotonic_increasing_featurelist_id [str, optional] (new in version 2.11) the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str, optional] (new in version 2.11) the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

n_clusters: int, optional (new in version 2.27) Number of clusters to use in an unsupervised clustering model. This parameter is used only for unsupervised clustering models that don't automatically determine the number of clusters.

Returns

model_job_id [str] id of created job, can be used as parameter to `ModelJob.get` method or `wait_for_async_model_creation` function

Examples

Use a Blueprint instance:

```
blueprint = project.get_blueprints()[0]
model_job_id = project.train(blueprint, training_row_count=project.max_train_
↪rows)
```

Use a `blueprint_id`, which is a string. In the first case, it is assumed that the blueprint was created by this project. If you are using a blueprint used by another project, you will need to pass the id of that other project as well.

```
blueprint_id = 'e1c7fc29ba2e612a72272324b8a842af'
project.train(blueprint, training_row_count=project.max_train_rows)

another_project.train(blueprint, source_project_id=project.id)
```

You can also easily use this interface to train a new model using the data from an existing model:

```
model = project.get_models()[0]
model_job_id = project.train(model.blueprint.id,
                             sample_pct=100)
```

train_datetime (*blueprint_id*, *featurelist_id=None*, *training_row_count=None*,
training_duration=None, *source_project_id=None*, *mono-*
tonic_increasing_featurelist_id=<object object>, *mono-*
tonic_decreasing_featurelist_id=<object object>, *use_project_settings=False*,
sampling_method=None, *n_clusters=None*)

Create a new model in a datetime partitioned project

If the project is not datetime partitioned, an error will occur.

All durations should be specified with a duration string such as those returned by the `partitioning_methods.construct_duration_string` helper method. Please see [datetime partitioned project documentation](#) for more information on duration strings.

Parameters

blueprint_id [str] the blueprint to use to train the model

featurelist_id [str, optional] the featurelist to use to train the model. If not specified, the project default will be used.

training_row_count [int, optional] the number of rows of data that should be used to train the model. If specified, neither `training_duration` nor `use_project_settings` may be specified.

training_duration [str, optional] a duration string specifying what time range the data used to train the model should span. If specified, neither `training_row_count` nor `use_project_settings` may be specified.

sampling_method [str, optional] (New in version v2.23) defines the way training data is selected. Can be either `random` or `latest`. In combination with `training_row_count` defines how rows are selected from backtest (`latest` by default). When training data is defined using time range (`training_duration` or `use_project_settings`) this setting changes the way `time_window_sample_pct` is applied (`random` by default). Applicable to OTV projects only.

use_project_settings [bool, optional] (New in version v2.20) defaults to `False`. If `True`, indicates that the custom backtest partitioning settings specified by the user will be used to train the model and evaluate backtest scores. If specified, neither `training_row_count` nor `training_duration` may be specified.

source_project_id [str, optional] the id of the project this blueprint comes from, if not this project. If left unspecified, the blueprint must belong to this project.

monotonic_increasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. Passing `None` disables increasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

monotonic_decreasing_featurelist_id [str, optional] (New in version v2.18) optional, the id of the featurelist that defines the set of features with a monotonically decreasing relationship to the target. Passing `None` disables decreasing monotonicity constraint. Default (`dr.enums.MONOTONICITY_FEATURELIST_DEFAULT`) is the one specified by the blueprint.

n_clusters [int, optional] The number of clusters to use in the specified unsupervised clustering model. ONLY VALID IN UNSUPERVISED CLUSTERING PROJECTS

Returns

job [ModelJob] the created job to build the model

blend (*model_ids*: List[str], *blender_method*: str) → datarobot.models.modeljob.ModelJob

Submit a job for creating blender model. Upon success, the new job will be added to the end of the queue.

Parameters

model_ids [list of str] List of model ids that will be used to create blender. These models should have completed validation stage without errors, and can't be blenders or DataRobot Prime

blender_method [str] Chosen blend method, one from `datarobot.enums.BLENDER_METHOD`. If this is a time series project, only methods in `datarobot.enums.TS_BLENDER_METHOD` are allowed.

Returns

model_job [ModelJob] New ModelJob instance for the blender creation job in queue.

See also:

`datarobot.models.Project.check_blendable` to confirm if models can be blended

check_blendable (*model_ids*: *List[str]*, *blender_method*: *str*) → `datarobot.helpers.eligibility_result.EligibilityResult`
Check if the specified models can be successfully blended

Parameters

model_ids [list of str] List of model ids that will be used to create blender. These models should have completed validation stage without errors, and can't be blenders or DataRobot Prime

blender_method [str] Chosen blend method, one from `datarobot.enums.BLENDER_METHOD`. If this is a time series project, only methods in `datarobot.enums.TS_BLENDER_METHOD` are allowed.

Returns

EligibilityResult

start_prepare_model_for_deployment (*model_id*: *str*) → None
Prepare a specific model for deployment.

The requested model will be trained on the maximum autopilot size then go through the recommendation stages. For datetime partitioned projects, this includes the feature impact stage, retraining on a reduced feature list, and retraining the best of the reduced feature list model and the max autopilot original model on recent data. For non-datetime partitioned projects, this includes the feature impact stage, retraining on a reduced feature list, retraining the best of the reduced feature list model and the max autopilot original model up to the holdout size, then retraining the up-to-the holdout model on the full dataset.

Parameters

model_id [str] The model to prepare for deployment.

get_all_jobs (*status*: *Optional[datarobot.enums.Enum]* = None) → List[`datarobot.models.job.Job`]
Get a list of jobs

This will give Jobs representing any type of job, including modeling or predict jobs.

Parameters

status [QUEUE_STATUS enum, optional] If called with `QUEUE_STATUS.INPROGRESS`, will return the jobs that are currently running.

If called with `QUEUE_STATUS.QUEUE`, will return the jobs that are waiting to be run.

If called with `QUEUE_STATUS.ERROR`, will return the jobs that have errored.

If no value is provided, will return all jobs currently running or waiting to be run.

Returns

jobs [list] Each is an instance of Job

get_blenders () → List[`datarobot.models.model.BlenderModel`]
Get a list of blender models.

Returns

list of BlenderModel list of all blender models in project.

get_frozen_models () → List[`datarobot.models.model.FrozenModel`]
Get a list of frozen models

Returns

list of FrozenModel list of all frozen models in project.

get_combined_models () → List[datarobot.models.model.CombinedModel]

Get a list of models in segmented project.

Returns

list of CombinedModel list of all combined models in segmented project.

get_active_combined_model () → datarobot.models.model.CombinedModel

Retrieve currently active combined model in segmented project.

Returns

CombinedModel currently active combined model in segmented project.

get_segments_models (*combined_model_id*: Optional[str] = None) → List[Dict[str, Any]]

Retrieve a list of all models belonging to the segments/child projects of the segmented project.

Parameters

combined_model_id [str, optional] Id of the combined model to get segments for. If there is only a single combined model it can be retrieved automatically, but this must be specified when there are > 1 combined models.

Returns

segments_models [list(dict)] A list of dictionaries containing all of the segments/child projects, each with a list of their models ordered by metric from best to worst.

get_model_jobs (*status*: Optional[datarobot.enums.Enum] = None) → List[datarobot.models.model.job.ModelJob]

Get a list of modeling jobs

Parameters

status [QUEUE_STATUS enum, optional] If called with QUEUE_STATUS.INPROGRESS, will return the modeling jobs that are currently running.

If called with QUEUE_STATUS.QUEUE, will return the modeling jobs that are waiting to be run.

If called with QUEUE_STATUS.ERROR, will return the modeling jobs that have errored.

If no value is provided, will return all modeling jobs currently running or waiting to be run.

Returns

jobs [list] Each is an instance of ModelJob

get_predict_jobs (*status*: Optional[datarobot.enums.Enum] = None) → List[datarobot.models.predict_job.PredictJob]

Get a list of prediction jobs

Parameters

status [QUEUE_STATUS enum, optional] If called with QUEUE_STATUS.INPROGRESS, will return the prediction jobs that are currently running.

If called with QUEUE_STATUS.QUEUE, will return the prediction jobs that are waiting to be run.

If called with `QUEUE_STATUS.ERROR`, will return the prediction jobs that have errored.

If called without a status, will return all prediction jobs currently running or waiting to be run.

Returns

jobs [list] Each is an instance of `PredictJob`

wait_for_autopilot (*check_interval: Union[float, int] = 20.0, timeout: Union[float, int, None] = 86400, verbosity: Union[int, datarobot.enums.Enum] = 1*) → None

Blocks until autopilot is finished. This will raise an exception if the autopilot mode is changed from `AUTOPILOT_MODE.FULL_AUTO`.

It makes API calls to sync the project state with the server and to look at which jobs are enqueued.

Parameters

check_interval [float or int] The maximum time (in seconds) to wait between checks for whether autopilot is finished

timeout [float or int or None] After this long (in seconds), we give up. If None, never timeout.

verbosity: This should be `VERBOSITY_LEVEL.SILENT` or `VERBOSITY_LEVEL.VERBOSE`. For `VERBOSITY_LEVEL.SILENT`, nothing will be displayed about progress. For `VERBOSITY_LEVEL.VERBOSE`, the number of jobs in progress or queued is shown. Note that new jobs are added to the queue along the way.

Raises

AsyncTimeoutError If autopilot does not finished in the amount of time specified

RuntimeError If a condition is detected that indicates that autopilot will not complete on its own

rename (*project_name: str*) → None

Update the name of the project.

Parameters

project_name [str] The new name

set_project_description (*project_description: str*) → None

Set or Update the project description.

Parameters

project_description [str] The new description for this project.

unlock_holdout () → None

Unlock the holdout for this project.

This will cause subsequent queries of the models of this project to contain the metric values for the holdout set, if it exists.

Take care, as this cannot be undone. Remember that best practice is to select a model before analyzing the model performance on the holdout set

set_worker_count (*worker_count: int*) → None

Sets the number of workers allocated to this project.

Note that this value is limited to the number allowed by your account. Lowering the number will not stop currently running jobs, but will cause the queue to wait for the appropriate number of jobs to finish before attempting to run more jobs.

Parameters

worker_count [int] The number of concurrent workers to request from the pool of workers. (New in version v2.14) Setting this to -1 will update the number of workers to the maximum available to your account.

set_advanced_options (*advanced_options*: *Optional[datarobot.helpers.AdvancedOptions]* = *None*, ***kwargs*) → None
Update the advanced options of this project.

Note: project options will not be stored at the database level, so the options set via this method will only be attached to a project instance for the lifetime of a client session (if you quit your session and reopen a new one before running autopilot, the advanced options will be lost).

Either accepts an AdvancedOptions object to replace all advanced options or individual keyword arguments. This is an inplace update, not a new object. The options set will only remain for the life of this project instance within a given session.

Parameters

advanced_options [AdvancedOptions, optional] AdvancedOptions instance as an alternative to passing individual parameters.

weights [string, optional] The name of a column indicating the weight of each row

response_cap [float in [0.5, 1), optional] Quantile of the response distribution to use for response capping.

blueprint_threshold [int, optional] Number of hours models are permitted to run before being excluded from later autopilot stages Minimum 1

seed [int, optional] a seed to use for randomization

smart_downsampled [bool, optional] whether to use smart downsampling to throw away excess rows of the majority class. Only applicable to classification and zero-boosted regression projects.

majority_downsampling_rate [float, optional] The percentage between 0 and 100 of the majority rows that should be kept. Specify only if using smart downsampling. May not cause the majority class to become smaller than the minority class.

offset [list of str, optional] (New in version v2.6) the list of the names of the columns containing the offset of each row

exposure [string, optional] (New in version v2.6) the name of a column containing the exposure of each row

accuracy_optimized_mb [bool, optional] (New in version v2.6) Include additional, longer-running models that will be run by the autopilot and available to run manually.

events_count [string, optional] (New in version v2.8) the name of a column specifying events count.

monotonic_increasing_featurelist_id [string, optional] (new in version 2.11) the id of the featurelist that defines the set of features with a monotonically increasing relationship to the target. If None, no such constraints are enforced. When specified, this will set a default for the project that can be overridden at model submission time if desired.

monotonic_decreasing_featurelist_id [string, optional] (new in version 2.11) the id of the featurelist that defines the set of features with a monotonically decreasing relationship to

the target. If None, no such constraints are enforced. When specified, this will set a default for the project that can be overridden at model submission time if desired.

only_include_monotonic_blueprints [bool, optional] (new in version 2.11) when true, only blueprints that support enforcing monotonic constraints will be available in the project or selected for the autopilot.

allowed_pairwise_interaction_groups [list of tuple, optional] (New in version v2.19) For GA2M models - specify groups of columns for which pairwise interactions will be allowed. E.g. if set to [(A, B, C), (C, D)] then GA2M models will allow interactions between columns AxB, BxC, AxC, CxD. All others (AxD, BxD) will not be considered.

blend_best_models: bool, optional (New in version v2.19) blend best models during Autopilot run

scoring_code_only: bool, optional (New in version v2.19) Keep only models that can be converted to scorable java code during Autopilot run

shap_only_mode: bool, optional (New in version v2.21) Keep only models that support SHAP values during Autopilot run. Use SHAP-based insights wherever possible. Defaults to False.

prepare_model_for_deployment: bool, optional (New in version v2.19) Prepare model for deployment during Autopilot run. The preparation includes creating reduced feature list models, retraining best model on higher sample size, computing insights and assigning `RECOMMENDED FOR DEPLOYMENT` label.

consider_blenders_in_recommendation: bool, optional (New in version 2.22.0) Include blenders when selecting a model to prepare for deployment in an Autopilot Run. Defaults to False.

min_secondary_validation_model_count: int, optional (New in version v2.19) Compute `All backtest` scores (datetime models) or cross validation scores for the specified number of highest ranking models on the Leaderboard, if over the Autopilot default.

autopilot_data_sampling_method: str, optional (New in version v2.23) one of `datarobot.enums.DATETIME_AUTOPILOT_DATA_SAMPLING_METHOD`. Applicable for OTV projects only, defines if autopilot uses `random` or `latest` sampling when iteratively building models on various training samples. Defaults to `random` for duration-based projects and to `latest` for row-based projects.

run_leakage_removed_feature_list: bool, optional (New in version v2.23) Run Autopilot on Leakage Removed feature list (if exists).

autopilot_with_feature_discovery: bool, optional. (New in version v2.23) If true, autopilot will run on a feature list that includes features found via search for interactions.

feature_discovery_supervised_feature_reduction: bool, optional (New in version v2.23) Run supervised feature reduction for feature discovery projects.

exponentially_weighted_moving_alpha: float, optional (New in version v2.26) defaults to None, value between 0 and 1 (inclusive), indicates alpha parameter used in exponentially weighted moving average within feature derivation window.

external_time_series_baseline_dataset_id: str, optional. (New in version v2.26) If provided, will generate metrics scaled by external model predictions metric for time series projects. The external predictions catalog must be validated before autopilot starts, see `Project.validate_external_time_series_baseline` and [external baseline predictions documentation](#) for further explanation.

use_supervised_feature_reduction: bool, default “True“ optional Time Series only. When true, during feature generation DataRobot runs a supervised algorithm to retain only qualifying features. Setting to false can severely impact autopilot duration, especially for datasets with many features.

primary_location_column: str, optional. The name of primary location column.

protected_features: list of str, optional. (New in version v2.24) A list of project features to mark as protected for Bias and Fairness testing calculations. Max number of protected features allowed is 10.

preferable_target_value: str, optional. (New in version v2.24) A target value that should be treated as a favorable outcome for the prediction. For example, if we want to check gender discrimination for giving a loan and our target is named `is_bad`, then the positive outcome for the prediction would be `No`, which means that the loan is good and that’s what we treat as a favorable result for the loaner.

fairness_metrics_set: str, optional. (New in version v2.24) Metric to use for calculating fairness. Can be one of `proportionalParity`, `equalParity`, `predictionBalance`, `trueFavorableAndUnfavorableRateParity` or `favorableAndUnfavorablePredictiveValueParity`. Used and required only if *Bias & Fairness in AutoML* feature is enabled.

fairness_threshold: str, optional. (New in version v2.24) Threshold value for the fairness metric. Can be in a range of `[0.0, 1.0]`. If the relative (i.e. normalized) fairness score is below the threshold, then the user will see a visual indication on the

bias_mitigation_feature_name [str, optional] The feature from protected features that will be used in a bias mitigation task to mitigate bias

bias_mitigation_technique [str, optional] One of `datarobot.enums.BiasMitigationTechnique` Options: - `preprocessingReweighting` - `postProcessingRejectionOptionBasedClassification` The technique by which we’ll mitigate bias, which will inform which bias mitigation task we insert into blueprints

include_bias_mitigation_feature_as_predictor_variable [bool, optional] Whether we should also use the mitigation feature as in input to the modeler just like any other categorical used for training, i.e. do we want the model to train on this feature in addition to using it for bias mitigation

list_advanced_options () → Dict[str, Any]

View the advanced options that have been set on a project instance. Includes those that haven’t been set (with value of None).

Returns

dict of advanced options and their values

set_partitioning_method (*cv_method: Optional[str] = None, validation_type: Optional[str] = None, seed: int = 0, reps: Optional[int] = None, user_partition_col: Optional[str] = None, training_level: Union[str, int, None] = None, validation_level: Union[str, int, None] = None, holdout_level: Union[str, int, None] = None, cv_holdout_level: Union[str, int, None] = None, validation_pct: Optional[int] = None, holdout_pct: Optional[int] = None, partition_key_cols: Optional[List[str]] = None, partitioning_method: Optional[datarobot.helpers.partitioning_methods.PartitioningMethod] = None*) → `datarobot.models.project.Project`

Configures the partitioning method for this project.

If this project does not already have a partitioning method set, creates a new configuration based on provided args.

If the `partitioning_method` arg is set, that configuration will instead be used.

Note: This is an inplace update, not a new object. The options set will only remain for the life of this project instance within a given session. You **must still call** `set_target` to make this change permanent for the project. Calling `refresh` without first calling `set_target` will invalidate this configuration. Similarly, calling `get` to retrieve a second copy of the project will not include this configuration.

New in version v3.0.

Parameters

cv_method: str The partitioning method used. Supported values can be found in `datarobot.enums.CV_METHOD`.

validation_type: str May be `“K-fold”` (K-fold cross-validation) or `“Train-validation, and holdout”` (Training, validation, and holdout).

seed [int] A seed to use for randomization.

reps [int] Number of cross validation folds to use.

user_partition_col [str] The name of the column containing the partition assignments.

training_level [Union[str,int]] The value of the partition column indicating a row is part of the training set.

validation_level [Union[str,int]] The value of the partition column indicating a row is part of the validation set.

holdout_level [Union[str,int]] The value of the partition column indicating a row is part of the holdout set (use `None` if you want no holdout set).

cv_holdout_level: Union[str,int] The value of the partition column indicating a row is part of the holdout set.

validation_pct [int] The desired percentage of dataset to assign to validation set.

holdout_pct [int] The desired percentage of dataset to assign to holdout set.

partition_key_cols [list] A list containing a single string, where the string is the name of the column whose values should remain together in partitioning.

partitioning_method [PartitioningMethod, optional] An instance of `datarobot.helpers.partitioning_methods.PartitioningMethod` that will be used instead of creating a new instance from the other args.

Returns

project [Project] The instance with updated attributes.

Raises

TypeError If `cv_method` or `validation_type` are not set and `partitioning_method` is not set.

InvalidUsageError If invoked after `project.set_target` or `project.start`, or if invoked with the wrong combination of args for a given partitioning method.

`get_uri ()` → str

Returns

url [str] Permanent static hyperlink to a project leaderboard.

get_leaderboard_ui_permalink () → str

Returns

url [str] Permanent static hyperlink to a project leaderboard.

open_leaderboard_browser () → None

Opens project leaderboard in web browser. Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

get_rating_table_models () → List[datarobot.models.model.RatingTableModel]

Get a list of models with a rating table

Returns

list of RatingTableModel list of all models with a rating table in project.

get_rating_tables () → List[datarobot.models.rating_table.RatingTable]

Get a list of rating tables

Returns

list of RatingTable list of rating tables in project.

get_access_list () → List[datarobot.models.sharing.SharingAccess]

Retrieve users who have access to this project and their access levels

New in version v2.15.

Returns

list of [class:SharingAccess <datarobot.SharingAccess>]

share (*access_list*: List[datarobot.models.sharing.SharingAccess], *send_notification*: Optional[bool] =

None, *include_feature_discovery_entities*: Optional[bool] = *None*) → None

Modify the ability of users to access this project

New in version v2.15.

Parameters

access_list [list of *SharingAccess*] the modifications to make.

send_notification [boolean, default None] (New in version v2.21) optional, whether or not an email notification should be sent, default to None

include_feature_discovery_entities [boolean, default None] (New in version v2.21) optional (default: None), whether or not to share all the related entities i.e., datasets for a project with Feature Discovery enabled

Raises

datarobot.ClientError [] if you do not have permission to share this project, if the user you're sharing with doesn't exist, if the same user appears multiple times in the *access_list*, or if these changes would leave the project without an owner

Examples

Transfer access to the project from `old_user@datarobot.com` to `new_user@datarobot.com`

```
import datarobot as dr

new_access = dr.SharingAccess(new_user@datarobot.com,
                              dr.enums.SHARING_ROLE.OWNER, can_share=True)
access_list = [dr.SharingAccess(old_user@datarobot.com, None), new_access]

dr.Project.get('my-project-id').share(access_list)
```

batch_features_type_transform (*parent_names: List[str], variable_type: str, prefix: Optional[str] = None, suffix: Optional[str] = None, max_wait: int = 600*) → List[datarobot.models.feature.Feature]

Create new features by transforming the type of existing ones.

New in version v2.17.

Note: The following transformations are only supported in batch mode:

1. Text to categorical or numeric
2. Categorical to text or numeric
3. Numeric to categorical

See [here](#) for special considerations when casting numeric to categorical. Date to categorical or numeric transformations are not currently supported for batch mode but can be performed individually using [create_type_transform_feature](#).

Parameters

parent_names [list[str]] The list of variable names to be transformed.

variable_type [str] The type new columns should have. Can be one of `âcategoricalâ`, `âcategoricalIntâ`, `ânumericâ`, and `âtextâ` - supported values can be found in `datarobot.enums.VARIABLE_TYPE_TRANSFORM`.

prefix [str, optional]

Note: Either `prefix`, `suffix`, or both must be provided.

The string that will preface all feature names. At least one of `prefix` and `suffix` must be specified.

suffix [str, optional]

Note: Either `prefix`, `suffix`, or both must be provided.

The string that will be appended at the end to all feature names. At least one of `prefix` and `suffix` must be specified.

max_wait [int, optional] The maximum amount of time to wait for DataRobot to finish processing the new column. This process can take more time with more data to process. If this operation times out, an `AsyncTimeoutError` will occur. DataRobot continues the processing and the new column may successfully be constructed.

Returns

list of Features all features for this project after transformation.

Raises

TypeError: If *parent_names* is not a list.

ValueError If value of *variable_type* is not from `datarobot.enums.VARIABLE_TYPE_TRANSFORM`.

AsyncFailureError If any of the responses from the server are unexpected.

AsyncProcessUnsuccessfulError If the job being waited for has failed or has been cancelled.

AsyncTimeoutError If the resource did not resolve in time.

clone_project (*new_project_name*: *Optional[str]* = *None*, *max_wait*: *int* = *600*) → `datarobot.models.project.Project`
Create a fresh (post-EDA1) copy of this project that is ready for setting targets and modeling options.

Parameters

new_project_name [*str*, optional] The desired name of the new project. If omitted, the API will default to "Copy of <original project>"

max_wait [*int*, optional] Time in seconds after which project creation is considered unsuccessful

Returns

`datarobot.models.Project`

create_interaction_feature (*name*: *str*, *features*: *List[str]*, *separator*: *str*, *max_wait*: *int* = *600*) → `datarobot.models.feature.InteractionFeature`
Create a new interaction feature by combining two categorical ones.

New in version v2.21.

Parameters

name [*str*] The name of final Interaction Feature

features [*list(str)*] List of two categorical feature names

separator [*str*] The character used to join the two data values, one of these '+ - / | & . _ , '

max_wait [*int*, optional] Time in seconds after which project creation is considered unsuccessful.

Returns

`datarobot.models.InteractionFeature` The data of the new Interaction feature

Raises

ClientError If requested Interaction feature can not be created. Possible reasons for example are:

- one of *features* either does not exist or is of unsupported type
- feature with requested *name* already exists
- invalid separator character submitted.

AsyncFailureError If any of the responses from the server are unexpected

AsyncProcessUnsuccessfulError If the job being waited for has failed or has been cancelled

AsyncTimeoutError If the resource did not resolve in time

get_relationships_configuration () → datarobot.models.relationships_configuration.RelationshipsConfiguration
Get the relationships configuration for a given project

New in version v2.21.

Returns

relationships_configuration: RelationshipsConfiguration relationships configuration applied to project

download_feature_discovery_dataset (*file_name: str, pred_dataset_id: Optional[str] = None*) → None

Download Feature discovery training or prediction dataset

Parameters

file_name [str] File path where dataset will be saved.

pred_dataset_id [str, optional] ID of the prediction dataset

download_feature_discovery_recipe_sqls (*file_name: str, model_id: Optional[str] = None, max_wait: int = 600*) → None

Export and download Feature discovery recipe SQL statements .. versionadded:: v2.25

Parameters

file_name [str] File path where dataset will be saved.

model_id [str, optional] ID of the model to export SQL for. If specified, QL to generate only features used by the model will be exported. If not specified, SQL to generate all features will be exported.

max_wait [int, optional] Time in seconds after which export is considered unsuccessful.

Raises

ClientError If requested SQL cannot be exported. Possible reason is the feature is not available to user.

AsyncFailureError If any of the responses from the server are unexpected.

AsyncProcessUnsuccessfulError If the job being waited for has failed or has been cancelled.

AsyncTimeoutError If the resource did not resolve in time.

validate_external_time_series_baseline (*catalog_version_id: str, target: str, datetime_partitioning: datarobot.helpers.partitioning_methods.DatetimePartitioning, max_wait: int = 600*) → datarobot.models.external_baseline_validation.ExternalBaselineValidation

Validate external baseline prediction catalog.

The forecast windows settings, validation and holdout duration specified in the datetime specification must be consistent with project settings as these parameters are used to check whether the specified catalog version id has been validated or not. See *external baseline predictions documentation* for example usage.

Parameters

catalog_version_id: str Id of the catalog version for validating external baseline predictions.

target: str The name of the target column.

datetime_partitioning: DatetimePartitioning object Instance of the DatetimePartitioning defined in `datarobot.helpers.partitioning_methods`.

Attributes of the object used to check the validation are:

- `datetime_partition_column`
- `forecast_window_start`
- `forecast_window_end`
- `holdout_start_date`
- `holdout_end_date`
- `backtests`
- `multiseries_id_columns`

If the above attributes are different from the project settings, the catalog version will not pass the validation check in the autopilot.

max_wait: int, optional The maximum number of seconds to wait for the catalog version to be validated before raising an error.

Returns

external_baseline_validation_info: ExternalBaselineValidationInfo Validation result of the specified catalog version.

Raises

AsyncTimeoutError Raised if the catalog version validation took more time than specified by the `max_wait` parameter.

download_multicategorical_data_format_errors (*file_name: str*) → None

Download multicategorical data format errors to the CSV file. If any format errors were detected in potentially multicategorical features the resulting file will contain at max 10 entries. CSV file content contains feature name, dataset index in which the error was detected, row value and type of error detected. In case that there were no errors or none of the features were potentially multicategorical the CSV file will be empty containing only the header.

Parameters

file_name [str] File path where CSV file will be saved.

get_multiseries_names () → List[Optional[str]]

For a multiseries timeseries project it returns all distinct entries in the multiseries column. For a non timeseries project it will just return an empty list.

Returns

multiseries_names: List[str] List of all distinct entries in the multiseries column

restart_segment (*segment: str*)

Restart single segment in a segmented project.

New in version v2.28.

Segment restart is allowed only for segments that haven't reached modeling phase. Restart will permanently remove previous project and trigger set up of a new one for particular segment.

Parameters

segment [str] Segment to restart

get_bias_mitigated_models (*parent_model_id: Optional[str] = None, offset: Optional[int] = 0, limit: Optional[int] = 100*) → List[Dict[str, Any]]

List the child models with bias mitigation applied

New in version v2.29.

Parameters

parent_model_id [str, optional] Filter by parent models

offset [int, optional] Number of items to skip.

limit [int, optional] Number of items to return.

Returns

models [list of dict]

apply_bias_mitigation (*bias_mitigation_parent_leaderboard_id:* str,
bias_mitigation_feature_name: str, *bias_mitigation_technique:* str,
include_bias_mitigation_feature_as_predictor_variable: bool) →
datarobot.models.modeljob.ModelJob

Apply bias mitigation to an existing model by training a version of that model but with bias mitigation applied. An error will be returned if the model does not support bias mitigation with the technique requested.

New in version v2.29.

Parameters

bias_mitigation_parent_leaderboard_id [str] The leaderboard id of the model to apply bias mitigation to

bias_mitigation_feature_name [str] The feature name of the protected features that will be used in a bias mitigation task to attempt to mitigate bias

bias_mitigation_technique [str, optional] One of datarobot.enums.BiasMitigationTechnique Options: - "preprocessingReweighting" - "postProcessingRejectionOptionBasedClassification" The technique by which we'll mitigate bias, which will inform which bias mitigation task we insert into blueprints

include_bias_mitigation_feature_as_predictor_variable [bool] Whether we should also use the mitigation feature as in input to the modeler just like any other categorical used for training, i.e. do we want the model to "train on" this feature in addition to using it for bias mitigation

Returns

ModelJob the job of the model with bias mitigation applied that was just submitted for training

request_bias_mitigation_feature_info (*bias_mitigation_feature_name:* str) →
datarobot.models.model.BiasMitigationFeatureInfo

Request a compute job for bias mitigation feature info for a given feature, which will include - if there are any rare classes - if there are any combinations of the target values and the feature values that never occur in the same row - if the feature has a high number of missing values. Note that this feature check is dependent on the current target selected for the project.

New in version v2.29.

Parameters

bias_mitigation_feature_name [str] The feature name of the protected features that will be used in a bias mitigation task to attempt to mitigate bias

Returns

BiasMitigationFeatureInfo Bias mitigation feature info model for the requested feature

get_bias_mitigation_feature_info (*bias_mitigation_feature_name*: *str*) → `datarobot.models.model.BiasMitigationFeatureInfo`

Get the computed bias mitigation feature info for a given feature, which will include - if there are any rare classes - if there are any combinations of the target values and the feature values that never occur in the same row - if the feature has a high number of missing values. Note that this feature check is dependent on the current target selected for the project. If this info has not already been computed, this will raise a 404 error.

New in version v2.29.

Parameters

bias_mitigation_feature_name [*str*] The feature name of the protected features that will be used in a bias mitigation task to attempt to mitigate bias

Returns

BiasMitigationFeatureInfo Bias mitigation feature info model for the requested feature

classmethod from_data (*data*: *Union[Dict[str, Any], List[Dict[str, Any]]]*) → T

Instantiate an object of this class using a dict.

Parameters

data [*dict*] Correctly snake_cased keys and their values.

classmethod from_server_data (*data*: *Union[Dict[str, Any], List[Dict[str, Any]]]*, *keep_attrs*: *Optional[Iterable[str]] = None*) → T

Instantiate an object of this class using the data directly from the server, meaning that the keys may have the wrong camel casing

Parameters

data [*dict*] The directly translated dict of JSON from the server. No casing fixes have taken place

keep_attrs [*iterable*] List, set or tuple of the dotted namespace notations for attributes to keep within the object structure even if their values are None

open_in_browser () → None

Opens class's relevant web browser location. If default browser is not available the URL is logged.

Note: If text-mode browsers are used, the calling process will block until the user exits the browser.

set_datetime_partitioning (*datetime_partition_spec*: *Optional[datarobot.helpers.partitioning_methods.DatetimePartitioningSpecification] = None*, ***kwargs*) → `datarobot.helpers.partitioning_methods.DatetimePartitioningSpecification`

Set the datetime partitioning method for a time series project by either passing in a `DatetimePartitioningSpecification` instance or any individual attributes of that class. Updates `self.partitioning_method` if already set previously (does not replace it).

This is an alternative to passing a specification to `Project.analyze_and_model` via the `partitioning_method` parameter. To see the full partitioning based on the project dataset, use `DatetimePartitioning.generate`.

New in version v3.0.

Parameters

datetime_partition_spec `DatetimePartitioningSpecification`, optional The customizable aspects of datetime partitioning for a time series project. An alternative to passing individual settings (attributes of the `DatetimePartitioningSpecification` class).

Returns

DatetimePartitioning Full partitioning including user-specified attributes as well as those determined by DR based on the dataset.

`list_datetime_partition_spec()` → Optional[datarobot.helpers.partitioning_methods.DatetimePartitioningSpecification]
List datetime partitioning settings.

This method makes an API call to retrieve settings from the DB if project is in the modeling stage, i.e. if `analyze_and_model` (autopilot) has already been called.

If `analyze_and_model` has not yet been called, this method will instead simply print settings from `project.partitioning_method`.

New in version v3.0.

Returns

DatetimePartitioningSpecification or None

```
class datarobot.helpers.eligibility_result.EligibilityResult (supported: bool,  
reason: str = "",  
context: str = "")
```

Represents whether a particular operation is supported

For instance, a function to check whether a set of models can be blended can return an `EligibilityResult` specifying whether or not blending is supported and why it may not be supported.

Attributes

supported [bool] whether the operation this result represents is supported

reason [str] why the operation is or is not supported

context [str] what operation isn't supported

2.3.45 Rating Table

```
class datarobot.models.RatingTable (id: str, rating_table_name: str, original_filename: str,  
project_id: str, parent_model_id: str, model_id: Optional[str] = None,  
model_job_id: Optional[str] = None, validation_job_id: Optional[str] = None,  
validation_error: Optional[str] = None)
```

Interface to modify and download rating tables.

Attributes

id [str] The id of the rating table.

project_id [str] The id of the project this rating table belongs to.

rating_table_name [str] The name of the rating table.

original_filename [str] The name of the file used to create the rating table.

parent_model_id [str] The model id of the model the rating table was validated against.

model_id [str] The model id of the model that was created from the rating table. Can be None if a model has not been created from the rating table.

model_job_id [str] The id of the job to create a model from this rating table. Can be None if a model has not been created from the rating table.

validation_job_id [str] The id of the created job to validate the rating table. Can be None if the rating table has not been validated.

validation_error [str] Contains a description of any errors caused during validation.

classmethod get (*project_id: str, rating_table_id: str*) →
 datarobot.models.rating_table.RatingTable

Retrieve a single rating table

Parameters

project_id [str] The ID of the project the rating table is associated with.

rating_table_id [str] The ID of the rating table

Returns

rating_table [RatingTable] The queried instance

classmethod create (*project_id: str, parent_model_id: str, filename: str, rating_table_name: str*
 = 'Uploaded Rating Table') → Job

Uploads and validates a new rating table CSV

Parameters

project_id [str] id of the project the rating table belongs to

parent_model_id [str] id of the model for which this rating table should be validated against

filename [str] The path of the CSV file containing the modified rating table.

rating_table_name [str, optional] A human friendly name for the new rating table. The string may be truncated and a suffix may be added to maintain unique names of all rating tables.

Returns

job: Job an instance of created async job

Raises

InputNotUnderstoodError Raised if *filename* isn't one of supported types.

ClientError (400) Raised if *parent_model_id* is invalid.

download (*filepath: str*) → None

Download a csv file containing the contents of this rating table

Parameters

filepath [str] The path at which to save the rating table file.

rename (*rating_table_name: str*) → None

Renames a rating table to a different name.

Parameters

rating_table_name [str] The new name to rename the rating table to.

create_model () → Job

Creates a new model from this rating table record. This rating table must not already be associated with a model and must be valid.

Returns

job: Job an instance of created async job

Raises

ClientError (422) Raised if creating model from a RatingTable that failed validation

JobAlreadyRequested Raised if creating model from a RatingTable that is already associated with a RatingTableModel

2.3.46 Recommended Models

class `datarobot.models.ModelRecommendation` (*project_id: str, model_id: str, recommendation_type: str*)

A collection of information about a recommended model for a project.

Attributes

project_id [str] the id of the project the model belongs to

model_id [str] the id of the recommended model

recommendation_type [str] the type of model recommendation

classmethod `get` (*project_id: str, recommendation_type: Optional[str] = None*) → `Optional[datarobot.models.recommended_model.ModelRecommendation]`

Retrieves the default or specified by `recommendation_type` recommendation.

Parameters

project_id [str] The project's id.

recommendation_type [enums.RECOMMENDED_MODEL_TYPE] The type of recommendation to get. If None, returns the default recommendation.

Returns

recommended_model [ModelRecommendation]

classmethod `get_all` (*project_id: str*) → `List[datarobot.models.recommended_model.ModelRecommendation]`

Retrieves all of the current recommended models for the project.

Parameters

project_id [str] The project's id.

Returns

recommended_models [list of ModelRecommendation]

classmethod `get_recommendation` (*recommended_models: List[datarobot.models.recommended_model.ModelRecommendation], recommendation_type: str*) → `Optional[datarobot.models.recommended_model.ModelRecommendation]`

Returns the model in the given list with the requested type.

Parameters

recommended_models [list of ModelRecommendation]

recommendation_type [enums.RECOMMENDED_MODEL_TYPE] the type of model to extract from the `recommended_models` list

Returns

recommended_model [ModelRecommendation or None if no model with the requested type exists]

get_model () → `Union[datarobot.models.model.DatetimeModel, datarobot.models.model.Model]`

Returns the Model associated with this ModelRecommendation.

Returns

recommended_model [Model or DatetimeModel if the project is datetime-partitioned]

2.3.47 ROC Curve

```
class datarobot.models.roc_curve.RocCurve (source: str, roc_points: List[EstimatedMetric],  
negative_class_predictions: List[float],  
positive_class_predictions: List[float],  
source_model_id: str)
```

ROC curve data for model.

Attributes

source [str] ROC curve data source. Can be `validation`, `crossValidation` or `holdout`.

roc_points [list of dict] List of precalculated metrics associated with thresholds for ROC curve.

negative_class_predictions [list of float] List of predictions from example for negative class

positive_class_predictions [list of float] List of predictions from example for positive class

source_model_id [str] ID of the model this ROC curve represents; in some cases, insights from the parent of a frozen model may be used

```
class datarobot.models.roc_curve.LabelwiseRocCurve (source: str, roc_points:  
List[EstimatedMetric], negative_class_predictions: List[float],  
positive_class_predictions: List[float], source_model_id:  
str, label: str, kolmogorov_smirnov_metric: float,  
auc: float)
```

Labelwise ROC curve data for one label and one source.

Attributes

source [str] ROC curve data source. Can be `validation`, `crossValidation` or `holdout`.

roc_points [list of dict] List of precalculated metrics associated with thresholds for ROC curve.

negative_class_predictions [list of float] List of predictions from example for negative class

positive_class_predictions [list of float] List of predictions from example for positive class

source_model_id [str] ID of the model this ROC curve represents; in some cases, insights from the parent of a frozen model may be used

label [str] Label name for

kolmogorov_smirnov_metric [float] Kolmogorov-Smirnov metric value for label

auc [float] AUC metric value for label

2.3.48 Ruleset

```
class datarobot.models.Ruleset (project_id: str, parent_model_id: str, ruleset_id: int,  
rule_count: int, score: float, model_id: Optional[str] = None)
```

Represents an approximation of a model with DataRobot Prime

Attributes

id [str] the id of the ruleset

rule_count [int] the number of rules used to approximate the model

score [float] the validation score of the approximation

project_id [str] the project the approximation belongs to

parent_model_id [str] the model being approximated

model_id [str or None] the model using this ruleset (if it exists). Will be None if no such model has been trained.

request_model () → Job

Request training for a model using this ruleset

Training a model using a ruleset is a necessary prerequisite for being able to download the code for a ruleset.

Returns

job: Job the job fitting the new Prime model

2.3.49 Segmented Modeling

API Reference for entities used in Segmented Modeling. See dedicated *User Guide* for examples.

```
class datarobot.CombinedModel (id: Optional[str] = None, project_id: Optional[str]  
                                = None, segmentation_task_id: Optional[str] = None,  
                                is_active_combined_model: bool = False)
```

A model from a segmented project. Combination of ordinary models in child segments projects.

Attributes

id [str] the id of the model

project_id [str] the id of the project the model belongs to

segmentation_task_id [str] the id of a segmentation task used in this model

is_active_combined_model [bool] flag indicating if this is the active combined model in segmented project

```
classmethod get (project_id: str, combined_model_id: str) →  
                 datarobot.models.model.CombinedModel  
Retrieve combined model
```

Parameters

project_id [str] The project's id.

combined_model_id [str] Id of the combined model.

Returns

CombinedModel The queried combined model.

```
classmethod set_segment_champion (project_id: str, model_id: str, clone: bool = False) →  
                                   str
```

Update a segment champion in a combined model by setting the model_id that belongs to the child project_id as the champion.

Parameters

project_id [str] The project id for the child model that contains the model id.

model_id [str] Id of the model to mark as the champion

clone [bool] (New in version v2.29) optional, defaults to False. Defines if combined model has to be cloned prior to setting champion (champion will be set for new combined model if yes).

Returns

combined_model_id [str] Id of the combined model that was updated

get_segments_info () → List[datarobot.models.segmentation.SegmentInfo]
Retrieve Combined Model segments info

Returns

list[SegmentInfo] List of segments

get_segments_as_dataframe (*encoding: str = 'utf-8'*) → pandas.core.frame.DataFrame
Retrieve Combine Models segments as a DataFrame.

Parameters

encoding [str, optional] A string representing the encoding to use in the output csv file. Defaults to 'utf-8'.

Returns

DataFrame Combined model segments

get_segments_as_csv (*filename: str, encoding: str = 'utf-8'*) → None
Save the Combine Models segments to a csv.

Parameters

filename [str or file object] The path or file object to save the data to.

encoding [str, optional] A string representing the encoding to use in the output csv file. Defaults to 'utf-8'.

train (*sample_pct: Optional[float] = None, featurelist_id: Optional[str] = None, scoring_type: Optional[str] = None, training_row_count: Optional[int] = None, monotonic_increasing_featurelist_id: Union[str, object, None] = <object object>, monotonic_decreasing_featurelist_id: Union[str, object, None] = <object object>*) → NoReturn
Inherited from Model - CombinedModels cannot be retrained directly

train_datetime (*featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, training_duration: Optional[str] = None, time_window_sample_pct: Optional[int] = None, monotonic_increasing_featurelist_id: Union[str, object, None] = <object object>, monotonic_decreasing_featurelist_id: Union[str, object, None] = <object object>, use_project_settings: bool = False, sampling_method: Optional[str] = None, n_clusters: Optional[int] = None*) → NoReturn
Inherited from Model - CombinedModels cannot be retrained directly

retrain (*sample_pct: Optional[float] = None, featurelist_id: Optional[str] = None, training_row_count: Optional[int] = None, n_clusters: Optional[int] = None*) → NoReturn
Inherited from Model - CombinedModels cannot be retrained directly

request_frozen_model (*sample_pct: Optional[float] = None, training_row_count: Optional[int] = None*) → NoReturn
Inherited from Model - CombinedModels cannot be retrained as frozen

request_frozen_datetime_model (*training_row_count: Optional[int] = None, training_duration: Optional[str] = None, training_start_date: Optional[datetime.datetime] = None, training_end_date: Optional[datetime.datetime] = None, time_window_sample_pct: Optional[int] = None, sampling_method: Optional[str] = None*) → NoReturn

Inherited from Model - CombinedModels cannot be retrained as frozen

cross_validate () → NoReturn

Inherited from Model - CombinedModels cannot request cross validation

class datarobot.**SegmentationTask** (*id: str, project_id: str, name: str, type: str, created: str, segments_count: int, segments: List[str], metadata: Dict[str, bool], data: SegmentationData*)

A Segmentation Task is used for segmenting an existing project into multiple child projects. Each child project (or segment) will be a separate autopilot run. Currently only user defined segmentation is supported.

Example for creating a new SegmentationTask for Time Series segmentation with a user defined id column:

```
from datarobot import SegmentationTask

# Create the SegmentationTask
segmentation_task_results = SegmentationTask.create(
    project_id=project.id,
    target=target,
    use_time_series=True,
    datetime_partition_column=datetime_partition_column,
    multiseries_id_columns=[multiseries_id_column],
    user_defined_segment_id_columns=[user_defined_segment_id_column]
)

# Retrieve the completed SegmentationTask object from the job results
segmentation_task = segmentation_task_results['completedJobs'][0]
```

Attributes

id [ObjectId] The id of the segmentation task.

project_id [ObjectId] The associated id of the parent project.

type [str] What type of job the segmentation task is associated with, e.g. auto_ml or auto_ts.

created [datetime] The date this segmentation task was created.

segments_count [int] The number of segments the segmentation task generated.

segments [list of strings] The segment names that the segmentation task generated.

metadata [dict] List of features that help to identify the parameters used by the segmentation task.

data [dict] Optional parameters that are associated with enabled metadata for the segmentation task.

classmethod **from_data** (*data: ServerDataDictType*) → SegmentationTask

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

collect_payload () → Dict[str, str]

Convert the record to a dictionary

classmethod create (*project_id*: str, *target*: str, *use_time_series*: bool = False, *datetime_partition_column*: Optional[str] = None, *multiseries_id_columns*: Optional[List[str]] = None, *user_defined_segment_id_columns*: Optional[List[str]] = None, *max_wait*: int = 600, *model_package_id*: Optional[str] = None) → SegmentationTaskCreatedResponse

Creates segmentation tasks for the project based on the defined parameters.

Parameters

project_id [str] The associated id of the parent project.

target [str] The column that represents the target in the dataset.

use_time_series [bool] Whether AutoTS or AutoML segmentations should be generated.

datetime_partition_column [str or null] Required for Time Series. The name of the column whose values as dates are used to assign a row to a particular partition.

multiseries_id_columns [list of str or null] Required for Time Series. A list of the names of multiseries id columns to define series within the training data. Currently only one multiseries id column is supported.

user_defined_segment_id_columns [list of str or null] Required when using a column for segmentation. A list of the segment id columns to use to define what columns are used to manually segment data. Currently only one user defined segment id column is supported.

model_package_id [str] Required when using automated segmentation. The associated id of the model in the DataRobot Model Registry that will be used to perform automated segmentation on a dataset.

max_wait [integer] The number of seconds to wait

Returns

segmentation_tasks [dict] Dictionary containing the numberOfJobs, completedJobs, and failedJobs. completedJobs is a list of SegmentationTask objects, while failed jobs is a list of dictionaries indicating problems with submitted tasks.

classmethod list (*project_id*: str) → List[datarobot.models.segmentation.SegmentationTask]

List all of the segmentation tasks that have been created for a specific project_id.

Parameters

project_id [str] The id of the parent project

Returns

segmentation_tasks [list of SegmentationTask] List of instances with initialized data.

classmethod get (*project_id*: str, *segmentation_task_id*: str) →

datarobot.models.segmentation.SegmentationTask

Retrieve information for a single segmentation task associated with a project_id.

Parameters

project_id [str] The id of the parent project

segmentation_task_id [str] The id of the segmentation task

Returns

segmentation_task [SegmentationTask] Instance with initialized data.

```
class datarobot.SegmentInfo (project_id: str, segment: str, project_stage: str, project_status_error: str, autopilot_done: bool, model_count: Optional[int] = None, model_id: Optional[str] = None)
```

A SegmentInfo is an object containing information about the combined model segments

Attributes

project_id [str] The associated id of the child project.

segment [str] the name of the segment

project_stage [str] A description of the current stage of the project

project_status_error [str] Project status error message.

autopilot_done [bool] Is autopilot done for the project.

model_count [int] Count of trained models in project.

model_id [str] ID of segment champion model.

```
classmethod list (project_id: str, model_id: str) → List[datarobot.models.segmentation.SegmentInfo]  
List all of the segments that have been created for a specific project_id.
```

Parameters

project_id [str] The id of the parent project

Returns

segments [list of datarobot.models.segmentation.SegmentInfo] List of instances with initialized data.

```
class datarobot.models.segmentation.SegmentationTask (id: str, project_id: str, name: str, type: str, created: str, segments_count: int, segments: List[str], metadata: Dict[str, bool], data: Segmentation-Data)
```

A Segmentation Task is used for segmenting an existing project into multiple child projects. Each child project (or segment) will be a separate autopilot run. Currently only user defined segmentation is supported.

Example for creating a new SegmentationTask for Time Series segmentation with a user defined id column:

```
from datarobot import SegmentationTask  
  
# Create the SegmentationTask  
segmentation_task_results = SegmentationTask.create(  
    project_id=project.id,  
    target=target,  
    use_time_series=True,  
    datetime_partition_column=datetime_partition_column,  
    multiserries_id_columns=[multiserries_id_column],  
    user_defined_segment_id_columns=[user_defined_segment_id_column]  
)  
  
# Retrieve the completed SegmentationTask object from the job results  
segmentation_task = segmentation_task_results['completedJobs'][0]
```

Attributes

id [ObjectId] The id of the segmentation task.

project_id [ObjectId] The associated id of the parent project.

type [str] What type of job the segmentation task is associated with, e.g. `auto_ml` or `auto_ts`.

created [datetime] The date this segmentation task was created.

segments_count [int] The number of segments the segmentation task generated.

segments [list of strings] The segment names that the segmentation task generated.

metadata [dict] List of features that help to identify the parameters used by the segmentation task.

data [dict] Optional parameters that are associated with enabled metadata for the segmentation task.

classmethod from_data (*data: ServerDataDictType*) → SegmentationTask

Instantiate an object of this class using a dict.

Parameters

data [dict] Correctly snake_cased keys and their values.

collect_payload () → Dict[str, str]

Convert the record to a dictionary

classmethod create (*project_id: str, target: str, use_time_series: bool = False, datetime_partition_column: Optional[str] = None, multiseries_id_columns: Optional[List[str]] = None, user_defined_segment_id_columns: Optional[List[str]] = None, max_wait: int = 600, model_package_id: Optional[str] = None*) → SegmentationTaskCreatedResponse

Creates segmentation tasks for the project based on the defined parameters.

Parameters

project_id [str] The associated id of the parent project.

target [str] The column that represents the target in the dataset.

use_time_series [bool] Whether AutoTS or AutoML segmentations should be generated.

datetime_partition_column [str or null] Required for Time Series. The name of the column whose values as dates are used to assign a row to a particular partition.

multiseries_id_columns [list of str or null] Required for Time Series. A list of the names of multiseries id columns to define series within the training data. Currently only one multiseries id column is supported.

user_defined_segment_id_columns [list of str or null] Required when using a column for segmentation. A list of the segment id columns to use to define what columns are used to manually segment data. Currently only one user defined segment id column is supported.

model_package_id [str] Required when using automated segmentation. The associated id of the model in the DataRobot Model Registry that will be used to perform automated segmentation on a dataset.

max_wait [integer] The number of seconds to wait

Returns

segmentation_tasks [dict] Dictionary containing the `numberOfJobs`, `completedJobs`, and `failedJobs`. `completedJobs` is a list of SegmentationTask objects, while `failedJobs` is a list of dictionaries indicating problems with submitted tasks.

classmethod list (*project_id: str*) → List[datarobot.models.segmentation.SegmentationTask]

List all of the segmentation tasks that have been created for a specific `project_id`.

Parameters

project_id [str] The id of the parent project

Returns

segmentation_tasks [list of SegmentationTask] List of instances with initialized data.

classmethod get (*project_id*: str, *segmentation_task_id*: str) →
datarobot.models.segmentation.SegmentationTask
Retrieve information for a single segmentation task associated with a project_id.

Parameters

project_id [str] The id of the parent project

segmentation_task_id [str] The id of the segmentation task

Returns

segmentation_task [SegmentationTask] Instance with initialized data.

2.3.50 SHAP

class datarobot.models.**ShapImpact** (*count*: int, *shap_impacts*: List[ShapImpactType],
row_count: Optional[int] = None)

Represents SHAP impact score for a feature in a model.

New in version v2.21.

Notes

SHAP impact score for a feature has the following structure:

- **feature_name**: (str) the feature name in dataset
- **impact_normalized**: (float) normalized impact score value (largest value is 1)
- **impact_unnormalized**: (float) raw impact score value

Attributes

count [int] the number of SHAP Impact object returned

row_count: int or None the sample size (specified in rows) to use for Shap Impact computation

shap_impacts [list] a list which contains SHAP impact scores for top 1000 features used by a model

classmethod create (*project_id*: str, *model_id*: str, *row_count*: Optional[int] = None) → Job
Create SHAP impact for the specified model.

Parameters

project_id [str] id of the project the model belongs to

model_id [str] id of the model to calculate shap impact for

row_count [int] the sample size (specified in rows) to use for Feature Impact computation

Returns

job [Job] an instance of created async job

classmethod `get` (*project_id: str, model_id: str*) → `datarobot.models.shap_impact.ShapImpact`
 Retrieve SHAP impact scores for features in a model.

Parameters

project_id [str] id of the project the model belongs to
model_id [str] id of the model the SHAP impact is for

Returns

shap_impact [ShapImpact] The queried instance.

Raises

ClientError (404) If the project or model does not exist or the SHAP impact has not been computed.

2.3.51 SharingAccess

class `datarobot.SharingAccess` (*username: str, role: str, can_share: Optional[bool] = None, can_use_data: Optional[bool] = None, user_id: Optional[str] = None*)

Represents metadata about whom a entity (e.g. a data store) has been shared with

New in version v2.14.

Currently `DataStores`, `DataSources`, `Datasets`, `Projects` (new in version v2.15) and `CalendarFiles` (new in version 2.15) can be shared.

This class can represent either access that has already been granted, or be used to grant access to additional users.

Attributes

username [str] a particular user

role [str or None] if a string, represents a particular level of access and should be one of `datarobot.enums.SHARING_ROLE`. For more information on the specific access levels, see the [sharing](#) documentation. If None, can be passed to a `share` function to revoke access for a specific user.

can_share [bool or None] if a bool, indicates whether this user is permitted to further share. When False, the user has access to the entity, but can only revoke their own access but not modify any user's access role. When True, the user can share with any other user at a access role up to their own. May be None if the `SharingAccess` was not retrieved from the DataRobot server but intended to be passed into a `share` function; this will be equivalent to passing True.

can_use_data [bool or None] if a bool, indicates whether this user should be able to view, download and process data (use to create projects, predictions, etc). For OWNER `can_use_data` is always True. If role is empty `canUseData` is ignored.

user_id [str or None] the id of the user

2.3.52 Training Predictions

class `datarobot.models.training_predictions.TrainingPredictionsIterator` (*client, path, limit=None*)

Lazily fetches training predictions from DataRobot API in chunks of specified size and then iterates rows from

responses as named tuples. Each row represents a training prediction computed for a dataset's row. Each named tuple has the following structure:

Notes

Each `PredictionValue` dict contains these keys:

label describes what this model output corresponds to. For regression projects, it is the name of the target feature. For classification and multiclass projects, it is a label from the target feature.

value the output of the prediction. For regression projects, it is the predicted value of the target. For classification and multiclass projects, it is the predicted probability that the row belongs to the class identified by the label.

Each `PredictionExplanations` dictionary contains these keys:

label [string] describes what output was driven by this prediction explanation. For regression projects, it is the name of the target feature. For classification projects, it is the class whose probability increasing would correspond to a positive strength of this prediction explanation.

feature [string] the name of the feature contributing to the prediction

feature_value [object] the value the feature took on for this row. The type corresponds to the feature (boolean, integer, number, string)

strength [float] algorithm-specific explanation value attributed to feature in this row

`ShapMetadata` dictionary contains these keys:

shap_remaining_total [float] The total of SHAP values for features beyond the `max_explanations`. This can be identically 0 in all rows, if `max_explanations` is greater than the number of features and thus all features are returned.

shap_base_value [float] the model's average prediction over the training data. SHAP values are deviations from the base value.

warnings [dict or None] SHAP values calculation warnings (e.g. additivity check failures in XGBoost models). Schema described as `ShapWarnings`.

`ShapWarnings` dictionary contains these keys:

mismatch_row_count [int] the count of rows for which additivity check failed

max_normalized_mismatch [float] the maximal relative normalized mismatch value

Examples

```
import datarobot as dr

# Fetch existing training predictions by their id
training_predictions = dr.TrainingPredictions.get(project_id, prediction_id)

# Iterate over predictions
for row in training_predictions.iterate_rows():
    print(row.row_id, row.prediction)
```

Attributes

row_id [int] id of the record in original dataset for which training prediction is calculated

partition_id [str or float] id of the data partition that the row belongs to. 1 corresponds to the validation partition or backtest 1.

prediction [float] the model's prediction for this data row

prediction_values [list of dictionaries] an array of dictionaries with a schema described as `PredictionValue`

timestamp [str or None] (New in version v2.11) an ISO string representing the time of the prediction in time series project; may be None for non-time series projects

forecast_point [str or None] (New in version v2.11) an ISO string representing the point in time used as a basis to generate the predictions in time series project; may be None for non-time series projects

forecast_distance [str or None] (New in version v2.11) how many time steps are between the forecast point and the timestamp in time series project; None for non-time series projects

series_id [str or None] (New in version v2.11) the id of the series in a multiseries project; may be NaN for single series projects; None for non-time series projects

prediction_explanations [list of dict or None] (New in version v2.21) The prediction explanations for each feature. The total elements in the array are bounded by `max_explanations` and feature count. Only present if prediction explanations were requested. Schema described as `PredictionExplanations`.

shap_metadata [dict or None] (New in version v2.21) The additional information necessary to understand SHAP based prediction explanations. Only present if `explanation_algorithm` equals `datarobot.enums.EXPLANATIONS_ALGORITHM.SHAP` was added in compute request. Schema described as `ShapMetadata`.

```
class datarobot.models.training_predictions.TrainingPredictions(project_id,
                                                             prediction_id,
                                                             model_id=None,
                                                             data_subset=None,
                                                             explanation_algorithm=None,
                                                             max_explanations=None,
                                                             shap_warnings=None)
```

Represents training predictions metadata and provides access to prediction results.

Notes

Each element in `shap_warnings` has the following schema:

partition_name [str] the partition used for the prediction record.

value [object] the warnings related to this partition.

The objects in `value` are:

mismatch_row_count [int] the count of rows for which additivity check failed.

max_normalized_mismatch [float] the maximal relative normalized mismatch value.

Examples

Compute training predictions for a model on the whole dataset

```
import datarobot as dr

# Request calculation of training predictions
training_predictions_job = model.request_training_predictions(dr.enums.DATA_
↳SUBSET.ALL)
training_predictions = training_predictions_job.get_result_when_complete()
print('Training predictions {} are ready'.format(training_predictions.prediction_
↳id))

# Iterate over actual predictions
for row in training_predictions.iterate_rows():
    print(row.row_id, row.partition_id, row.prediction)
```

List all training predictions for a project

```
import datarobot as dr

# Fetch all training predictions for a project
all_training_predictions = dr.TrainingPredictions.list(project_id)

# Inspect all calculated training predictions
for training_predictions in all_training_predictions:
    print(
        'Prediction {} is made for data subset "{}"'.format(
            training_predictions.prediction_id,
            training_predictions.data_subset,
        )
    )
```

Retrieve training predictions by id

```
import datarobot as dr

# Getting training predictions by id
training_predictions = dr.TrainingPredictions.get(project_id, prediction_id)

# Iterate over actual predictions
for row in training_predictions.iterate_rows():
    print(row.row_id, row.partition_id, row.prediction)
```

Attributes

project_id [str] id of the project the model belongs to

model_id [str] id of the model

prediction_id [str] id of generated predictions

data_subset [datarobot.enums.DATA_SUBSET] data set definition used to build predictions.
Choices are:

- ***datarobot.enums.DATA_SUBSET.ALL*** for all data available. Not valid for models in datetime partitioned projects.
- ***datarobot.enums.DATA_SUBSET.VALIDATION_AND_HOLDOUT*** for all data except training set. Not valid for models in datetime partitioned projects.
- ***datarobot.enums.DATA_SUBSET.HOLDOUT*** for holdout data set only.

- `datarobot.enums.DATA_SUBSET.ALL_BACKTESTS` for downloading the predictions for all backtest validation folds. Requires the model to have successfully scored all backtests. Datetime partitioned projects only.

explanation_algorithm [datarobot.enums.EXPLANATIONS_ALGORITHM] (New in version v2.21) Optional. If set to `shap`, the response will include prediction explanations based on the SHAP explainer (SHapley Additive exPlanations). Defaults to null (no prediction explanations).

max_explanations [int] (New in version v2.21) The number of top contributors that are included in prediction explanations. Max 100. Defaults to null for datasets narrower than 100 columns, defaults to 100 for datasets wider than 100 columns.

shap_warnings [list] (New in version v2.21) Will be present if `explanation_algorithm` was set to `datarobot.enums.EXPLANATIONS_ALGORITHM.SHAP` and there were additivity failures during SHAP values calculation.

classmethod list (*project_id*)

Fetch all the computed training predictions for a project.

Parameters

project_id [str] id of the project

Returns

A list of [py:class:TrainingPredictions objects]

classmethod get (*project_id*, *prediction_id*)

Retrieve training predictions on a specified data set.

Parameters

project_id [str] id of the project the model belongs to

prediction_id [str] id of the prediction set

Returns

TrainingPredictions object which is ready to operate with specified predictions

iterate_rows (*batch_size=None*)

Retrieve training prediction rows as an iterator.

Parameters

batch_size [int, optional] maximum number of training prediction rows to fetch per request

Returns

iterator [*TrainingPredictionsIterator*] an iterator which yields named tuples representing training prediction rows

get_all_as_dataframe (*class_prefix='class_', serializer='json'*)

Retrieve all training prediction rows and return them as a pandas.DataFrame.

Returned dataframe has the following structure:

- `row_id` : row id from the original dataset
- `prediction` : the model's prediction for this row
- `class_<label>` : the probability that the target is this class (only appears for classification and multiclass projects)

- `timestamp` : the time of the prediction (only appears for out of time validation or time series projects)
- `forecast_point` : the point in time used as a basis to generate the predictions (only appears for time series projects)
- `forecast_distance` : how many time steps are between `timestamp` and `forecast_point` (only appears for time series projects)
- `series_id` : the id of the series in a multiserie project or `None` for a single series project (only appears for time series projects)

Parameters

class_prefix [str, optional] The prefix to append to labels in the final dataframe. Default is `class_` (e.g., `apple` -> `class_apple`)

serializer [str, optional] Serializer to use for the download. Options: `json` (default) or `csv`.

Returns

dataframe: `pandas.DataFrame`

download_to_csv (*filename, encoding='utf-8', serializer='json'*)

Save training prediction rows into CSV file.

Parameters

filename [str or file object] path or file object to save training prediction rows

encoding [string, optional] A string representing the encoding to use in the output file, defaults to `'utf-8'`

serializer [str, optional] Serializer to use for the download. Options: `json` (default) or `csv`.

2.3.53 User Blueprints

```
class datarobot.UserBlueprint (blender: bool, blueprint_id: str, diagram: str, features: List[str],  
features_text: str, icons: List[int], insights: str, model_type:  
str, supported_target_types, user_blueprint_id: str, user_id:  
str, is_time_series: bool = False, reference_model: bool =  
False, shap_support: bool = False, supports_gpu: bool =  
False, blueprint=None, custom_task_version_metadata=None,  
hex_column_name_lookup: Optional[List[UserBlueprintsHexColumnNameLookupEntryDict]]  
= None, project_id: Optional[str] = None, vertex_context:  
Optional[List[VertexContextItem]] = None, blueprint_context:  
Optional[VertexContextItemMessages] = None, **kwargs)
```

A representation of a blueprint which may be modified by the user, saved to a user's AI Catalog, trained on projects, and shared with others.

It is recommended to install the python library called `datarobot_bp_workshop`, available via `pip`, for the best experience when building blueprints.

Please refer to <http://blueprint-workshop.datarobot.com> for tutorials, examples, and other documentation.

Parameters

blender: **bool** Whether the blueprint is a blender.

blueprint_id: **string** The deterministic id of the blueprint, based on its content.

custom_task_version_metadata: **list(list(string)), Optional** An association of custom entity ids and task ids.

diagram: **string** The diagram used by the UI to display the blueprint.

features: **list(string)** A list of the names of tasks used in the blueprint.

features_text: **string** A description of the blueprint via the names of tasks used.

hex_column_name_lookup: **list(UserBlueprintsHexColumnNameLookupEntry), Optional**
A lookup between hex values and data column names used in the blueprint.

icons: **list(int)** The icon(s) associated with the blueprint.

insights: **string** An indication of the insights generated by the blueprint.

is_time_series: **bool (Default=False)** Whether the blueprint contains time-series tasks.

model_type: **string** The generated or provided title of the blueprint.

project_id: **string, Optional** The id of the project the blueprint was originally created with, if applicable.

reference_model: **bool (Default=False)** Whether the blueprint is a reference model.

shap_support: **bool (Default=False)** Whether the blueprint supports shapley additive explanations.

supported_target_types: **list(enum('binary', 'multiclass', 'multilabel', 'nonnegative',**

'regression', 'unsupervised', 'unsupervisedclustering')) The list of supported targets of the current blueprint.

supports_gpu: **bool (Default=False)** Whether the blueprint supports execution on the GPU.

user_blueprint_id: **string** The unique id associated with the user blueprint.

user_id: **string** The id of the user who owns the blueprint.

blueprint: **list(dict) or list(UserBlueprintTask), Optional** The representation of a directed acyclic graph defining a pipeline of data through tasks and a final estimator.

vertex_context: **list(VertexContextItem), Optional** Info about, warnings about, and errors with a specific vertex in the blueprint.

blueprint_context: **VertexContextItemMessages** Warnings and errors which may describe or summarize warnings or errors in the blueprint's vertices

classmethod list (*limit: int = 100, offset: int = 0, project_id: Optional[str] = None*) →
List[datarobot.models.user_blueprints.models.UserBlueprint]

Fetch a list of the user blueprints the current user created

Parameters

limit: **int (Default=100)** The max number of results to return.

offset: **int (Default=0)** The number of results to skip (for pagination).

project_id: **string, Optional** The id of the project, used to filter for original project_id.

Returns

list(UserBlueprint)

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod get (user_blueprint_id: str, project_id: Optional[str] = None) →  
datarobot.models.user_blueprints.models.UserBlueprint
```

Retrieve a user blueprint

Parameters

user_blueprint_id: string Used to identify a specific user-owned blueprint.

project_id: string (optional, default is None) String representation of ObjectId for a given project. Used to validate selected columns in the user blueprint.

Returns

UserBlueprint

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod create (blueprint, model_type: Optional[str] = None, project_id: Optional[str] = None, save_to_catalog: bool = True) →  
datarobot.models.user_blueprints.models.UserBlueprint
```

Create a user blueprint

Parameters

blueprint: list(dict) or list(UserBlueprintTask) A list of tasks in the form of dictionaries which define a blueprint.

model_type: string, Optional The title to give to the blueprint.

project_id: string, Optional The project associated with the blueprint. Necessary in the event of project specific tasks, such as column selection tasks.

save_to_catalog: bool, (Default=True) Whether the blueprint being created should be saved to the catalog.

Returns

UserBlueprint

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod create_from_custom_task_version_id (custom_task_version_id: str, save_to_catalog: bool = True, description: Optional[str] = None) →  
datarobot.models.user_blueprints.models.UserBlueprint
```

Create a user blueprint with a single custom task version

Parameters

custom_task_version_id: string Id of custom task version from which the user blueprint is created

save_to_catalog: bool, (Default=True) Whether the blueprint being created should be saved to the catalog

description: string (Default=None) The description for the user blueprint that will be created from the custom task version.

Returns

UserBlueprint

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod clone_project_blueprint (blueprint_id: str, project_id: str,  
model_type: Optional[str] = None,  
save_to_catalog: bool = True) →  
datarobot.models.user_blueprints.models.UserBlueprint
```

Clone a blueprint from a project.

Parameters

blueprint_id: string The id associated with the blueprint to create the user blueprint from.

model_type: string, Optional The title to give to the blueprint.

project_id: string The id of the project which the blueprint to copy comes from.

save_to_catalog: bool, (Default=True) Whether the blueprint being created should be saved to the catalog.

Returns

UserBlueprint

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod clone_user_blueprint (user_blueprint_id: str, model_type: Op-  
tional[str] = None, project_id: Optional[str]  
= None, save_to_catalog: bool = True) →  
datarobot.models.user_blueprints.models.UserBlueprint
```

Clone a user blueprint.

Parameters

model_type: string, Optional The title to give to the blueprint.

project_id: string, Optional String representation of ObjectId for a given project. Used to validate selected columns in the user blueprint.

user_blueprint_id: string The id of the existing user blueprint to copy.

save_to_catalog: bool, (Default=True) Whether the blueprint being created should be saved to the catalog.

Returns

UserBlueprint

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod update (*blueprint*, *user_blueprint_id*: *str*, *model_type*: *Optional[str]* = *None*,
project_id: *Optional[str]* = *None*, *include_project_id_if_none*: *bool* =
False) → *datarobot.models.user_blueprints.models.UserBlueprint*

Update a user blueprint

Parameters

blueprint: **list(dict)** or **list(UserBlueprintTask)** A list of tasks in the form of dictionaries which define a blueprint. If *None*, will not be passed.

model_type: **string, Optional** The title to give to the blueprint. If *None*, will not be passed.

project_id: **string, Optional** The project associated with the blueprint. Necessary in the event of project specific tasks, such as column selection tasks. If *None*, will not be passed. To explicitly pass *None*, pass *True* to *include_project_id_if_none* (useful if unlinking a blueprint from a project)

user_blueprint_id: **string** Used to identify a specific user-owned blueprint.

include_project_id_if_none: **bool (Default=False)** Allows *project_id* to be passed as *None*, instead of ignored. If set to *False*, will not pass *project_id* in the API request if it is set to *None*. If *True*, the project id will be passed even if it is set to *None*.

Returns

UserBlueprint

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod delete (*user_blueprint_id*: *str*) → *requests.models.Response*

Delete a user blueprint, specified by the *userBlueprintId*.

Parameters

user_blueprint_id: **string** Used to identify a specific user-owned blueprint.

Returns

requests.models.Response

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod get_input_types () → *datarobot.models.user_blueprints.models.UserBlueprintAvailableInput*

Retrieve the input types which can be used with User Blueprints.

Returns

UserBlueprintAvailableInput

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod add_to_project (*project_id*: *str*, *user_blueprint_ids*: *Union[str, List[str]]*) →

datarobot.models.user_blueprints.models.UserBlueprintAddToProjectMenu

Add a list of user blueprints, by id, to a specified (by id) project's repository.

Parameters

project_id: string The projectId of the project for the repository to add the specified user blueprints to.

user_blueprint_ids: list(string) or string The ids of the user blueprints to add to the specified project's repository.

Returns

UserBlueprintAddToProjectMenu

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod get_available_tasks (project_id: Optional[str] = None,  
                                user_blueprint_id: Optional[str] = None) →  
                                datarobot.models.user_blueprints.models.UserBlueprintAvailableTasks
```

Retrieve the available tasks, organized into categories, which can be used to create or modify User Blueprints.

Parameters

project_id: string, Optional

user_blueprint_id: string, Optional

Returns

UserBlueprintAvailableTasks

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod validate_task_parameters (output_method: str, task_code:  
                                       str, task_parameters, project_id:  
                                       Optional[str] = None) →  
                                       datarobot.models.user_blueprints.models.UserBlueprintValidateTaskParameters
```

Validate that each value assigned to specified task parameters are valid.

Parameters

output_method: enum('P', 'Pm', 'S', 'Sm', 'T', 'TS')
The method representing how the task will output data.

task_code: string The task code representing the task to validate parameter values.

task_parameters: list(UserBlueprintTaskParameterValidationRequestParamItem) A list of task parameters and proposed values to be validated.

project_id: string (optional, default is None) The projectId representing the project where this user blueprint is edited.

Returns

UserBlueprintValidateTaskParameters

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod list_shared_roles (user_blueprint_id: str, limit: int = 100, offset: int = 0, id: Optional[str] = None, name: Optional[str] = None, share_recipient_type: Optional[str] = None) → List[datarobot.models.user_blueprints.models.UserBlueprintSharedRolesResponseV
```

Get a list of users, groups and organizations that have an access to this user blueprint

Parameters

id: str, Optional Only return the access control information for a organization, group or user with this ID.

limit: int (Default=100) At most this many results are returned.

name: string, Optional Only return the access control information for a organization, group or user with this name.

offset: int (Default=0) This many results will be skipped.

share_recipient_type: enum(“User”, “group”, “organization”), Optional Describes the recipient type, either user, group, or organization.

user_blueprint_id: str Used to identify a specific user-owned blueprint.

Returns

list(UserBlueprintSharedRolesResponseValidator)

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod validate_blueprint (blueprint, project_id: Optional[str] = None) → List[datarobot.models.user_blueprints.models.VertexContextItem]
Validate a user blueprint and return information about the inputs expected and outputs provided by each task.
```

Parameters

blueprint: list(dict) or list(UserBlueprintTask) The representation of a directed acyclic graph defining a pipeline of data through tasks and a final estimator.

project_id: string (optional, default is None) The projectId representing the project where this user blueprint is edited.

Returns

list(VertexContextItem)

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

```
classmethod update_shared_roles (user_blueprint_id: str, roles: List[Union[datarobot.models.user_blueprints.models.GrantAccessControlWithUser, datarobot.models.user_blueprints.models.GrantAccessControlWithIdValidator]]) → requests.models.Response
```

Share a user blueprint with a user, group, or organization

Parameters

user_blueprint_id: str Used to identify a specific user-owned blueprint.

roles: list(or(**GrantAccessControlWithUsernameValidator**, **GrantAccessControlWithIdValidator**))
 Array of GrantAccessControl objects., up to maximum 100 objects.

Returns

requests.models.Response

Raises

datarobot.errors.ClientError if the server responded with 4xx status

datarobot.errors.ServerError if the server responded with 5xx status

classmethod search_catalog (*search: Optional[str] = None, tag: Optional[str] = None, limit: int = 100, offset: int = 0, owner_user_id: Optional[str] = None, owner_username: Optional[str] = None, order_by: str = '-created'*) →
 datarobot.models.user_blueprints.models.UserBlueprintCatalogSearch

Fetch a list of the user blueprint catalog entries the current user has access to based on an optional search term, tags, owner user info, or sort order.

Parameters

search: string, Optional. A value to search for in the dataset's name, description, tags, column names, categories, and latest error. The search is case insensitive. If no value is provided for this parameter, or if the empty string is used, or if the string contains only whitespace, no filtering will be done. Partial matching is performed on dataset name and description fields while all other fields will only match if the search matches the whole value exactly.

tag: string, Optional. If provided, the results will be filtered to include only items with the specified tag.

limit: int, Optional. (default: 0), at most this many results are returned. To specify no limit, use 0. The default may change and a maximum limit may be imposed without notice.

offset: int, Optional. (default: 0), this many results will be skipped.

owner_user_id: string, Optional. Filter results to those owned by one or more owner identified by UID.

owner_username: string, Optional. Filter results to those owned by one or more owner identified by username.

order_by: string, Optional. Defaults to 'created'. Sort order which will be applied to catalog list, valid options are 'catalogName', 'originalName', 'description', 'created', and 'relevance'. For all options other than relevance, you may prefix the attribute name with a dash to sort in descending order. e.g. orderBy='-catalogName'.

2.3.54 VisualAI

class datarobot.models.visualai.**Image** (*image_id=None, project_id=None, height=0, width=0, **kwargs*)

An image stored in a project's dataset.

Attributes

id: str Image ID for this image.

image_type: str Image media type. Accessing this may require a server request and an associated delay in returning.

image_bytes: [octet] Raw octets of this image. Accessing this may require a server request and an associated delay in returning.

height: int Height of the image in pixels (72 pixels per inch).

width: int Width of the image in pixels (72 pixels per inch).

classmethod get (*project_id, image_id*)
Get a single image object from project.

Parameters

project_id: str Project that contains the images.

image_id: str ID of image to load from the project.

class datarobot.models.visualai.**SampleImage** (***kwargs*)
A sample image in a project's dataset.

If `Project.stage` is `datarobot.enums.PROJECT_STAGE.EDA2` then the `target_*` attributes of this class will have values, otherwise the values will all be `None`.

Attributes

image: Image Image object.

target_value: str Value associated with the `feature_name`.

classmethod list (*project_id, feature_name, target_value=None, offset=None, limit=None*)
Get sample images from a project.

Parameters

project_id: str Project that contains the images.

feature_name: str Name of feature column that contains images.

target_value: str Target value to filter images.

offset: int Number of images to be skipped.

limit: int Number of images to be returned.

class datarobot.models.visualai.**DuplicateImage** (***kwargs*)
An image that was duplicated in the project dataset.

Attributes

image: Image Image object.

count: int Number of times the image was duplicated.

classmethod list (*project_id, feature_name, offset=None, limit=None*)
Get all duplicate images in a project.

Parameters

project_id: str Project that contains the images.

feature_name: str Name of feature column that contains images.

offset: int Number of images to be skipped.

limit: int Number of images to be returned.

class `datarobot.models.visualai.ImageEmbedding` (**kwargs)

Vector representation of an image in an embedding space.

A vector in an embedding space will allow linear computations to be carried out between images: for example computing the Euclidean distance of the images.

Attributes

image: Image Image object used to create this map.

feature_name: str Name of the feature column this embedding is associated with.

position_x: int X coordinate of the image in the embedding space.

position_y: int Y coordinate of the image in the embedding space.

actual_target_value: object Actual target value of the dataset row.

classmethod `compute` (*project_id*, *model_id*)

Start creation of image embeddings for the model.

Parameters

project_id: str Project to start creation in.

model_id: str Project's model to start creation in.

Returns

str URL to check for image embeddings progress.

Raises

datarobot.errors.ClientError Server rejected creation due to client error. Most likely cause is bad `project_id` or `model_id`.

classmethod `models` (*project_id*)

List the models in a project.

Parameters

project_id: str Project that contains the models.

Returns

list(tuple(model_id, feature_name)) List of model and feature name pairs.

classmethod `list` (*project_id*, *model_id*, *feature_name*)

Return a list of ImageEmbedding objects.

Parameters

project_id: str Project that contains the images.

model_id: str Model that contains the images.

feature_name: str Name of feature column that contains images.

class `datarobot.models.visualai.ImageActivationMap` (**kwargs)

Mark areas of image with weight of impact on training.

This is a technique to display how various areas of the region were used in training, and their effect on predictions. Larger values in `activation_values` indicates a larger impact.

Attributes

image: Image Image object used to create this map.

overlay_image: Image Image object composited with activation heat map.

feature_name: str Name of the feature column that contains the value this map is based on.

height: int Height of the original image in pixels.

width: int Width of the original image in pixels.

actual_target_value: object Actual target value of the dataset row.

predicted_target_value: object Predicted target value of the dataset row that contains this image.

activation_values: [[int]] A row-column matrix that contains the activation strengths for image regions. Values are integers in the range [0, 255].

classmethod compute (*project_id, model_id*)

Start creation of a activation map in the given model.

Parameters

project_id: str Project to start creation in.

model_id: str Project's model to start creation in.

Returns

str URL to check for image embeddings progress.

Raises

datarobot.errors.ClientError Server rejected creation due to client error. Most likely cause is bad `project_id` or `model_id`.

classmethod models (*project_id*)

List the models in a project.

Parameters

project_id: str Project that contains the models.

Returns

list(tuple(model_id, feature_name)) List of model and feature name pairs.

classmethod list (*project_id, model_id, feature_name, offset=None, limit=None*)

Return a list of ImageActivationMap objects.

Parameters

project_id: str Project that contains the images.

model_id: str Model that contains the images.

feature_name: str Name of feature column that contains images.

offset: int Number of images to be skipped.

limit: int Number of images to be returned.

```

class datarobot.models.visualai.ImageAugmentationOptions (id: str, name: str,
                                                         project_id: str,
                                                         min_transformation_probability:
                                                         float,
                                                         current_transformation_probability:
                                                         float,
                                                         max_transformation_probability:
                                                         float,
                                                         min_number_of_new_images:
                                                         int,
                                                         current_number_of_new_images:
                                                         int,
                                                         max_number_of_new_images:
                                                         int,
                                                         transformations: Optional[List[datarobot.models.visualai.augmentation
                                                         = None)

```

A List of all supported Image Augmentation Transformations for a project. Includes additional information about minimum, maximum, and default values for a transformation.

Attributes

- name: string** The name of the augmentation list
- project_id: string** The project containing the image data to be augmented
- min_transformation_probability: float** The minimum allowed value for transformation probability.
- current_transformation_probability: float** Default setting for probability that each transformation will be applied to an image.
- max_transformation_probability: float** The maximum allowed value for transformation probability.
- min_number_of_new_images: int** The minimum allowed number of new rows to add for each existing row
- current_number_of_new_images: int** The default number of new rows to add for each existing row
- max_number_of_new_images: int** The maximum allowed number of new rows to add for each existing row
- transformations: list[dict]** List of transformations to possibly apply to each image

classmethod get (*project_id: str*) → datarobot.models.visualai.augmentation.ImageAugmentationOptions
Returns a list of all supported transformations for the given project

Parameters **project_id** – sting The id of the project for which to return the list of supported transformations.

Returns

ImageAugmentationOptions A list containing all the supported transformations for the project.

```
class datarobot.models.visualai.ImageAugmentationList (id: str, name: str, project_id: str, feature_name: Optional[str] = None, in_use: bool = False, initial_list: bool = False, transformation_probability: float = 0.0, number_of_new_images: int = 1, transformations: Optional[List[datarobot.models.visualai.augmentation.Transformation]] = None, samples_id: Optional[str] = None)
```

A List of Image Augmentation Transformations

Attributes

name: string The name of the augmentation list

project_id: string The project containing the image data to be augmented

feature_name: string (optional) name of the feature that the augmentation list is associated with

in_use: boolean Whether this is the list that will be passed in to every blueprint during blueprint generation before autopilot

initial_list: boolean True if this is the list to be used during training to produce augmentations

transformation_probability: float Probability that each transformation will be applied to an image. Value should be between 0.01 - 1.0.

number_of_new_images: int Number of new rows to add for each existing row

transformations: array List of transformations to possibly apply to each image

samples_id: str Id of last image augmentation sample generated for image augmentation list.

```
classmethod create (name: str, project_id: str, feature_name: Optional[str] = None, in_use: Optional[bool] = None, initial_list: bool = False, transformation_probability: float = 0.0, number_of_new_images: int = 1, transformations: Optional[List[datarobot.models.visualai.augmentation.Transformation]] = None, samples_id: Optional[str] = None) → datarobot.models.visualai.augmentation.ImageAugmentationList  
create a new image augmentation list
```

```
classmethod list (project_id: str, feature_name: Optional[str] = None) → List[datarobot.models.visualai.augmentation.ImageAugmentationList]  
List Image Augmentation Lists present in a project.
```

Parameters

project_id [str] Project Id to retrieve augmentation lists for.

feature_name [Optional[str]] If passed, the response will only include Image Augmentation Lists active for the provided feature name.

Returns

list[ImageAugmentationList]

```
update (name: Optional[str] = None, feature_name: Optional[str] = None, initial_list: Optional[bool] = None, transformation_probability: Optional[float] = None, number_of_new_images: Optional[int] = None, transformations: Optional[List[datarobot.models.visualai.augmentation.Transformation]] = None) → datarobot.models.visualai.augmentation.ImageAugmentationList
```

Update one or multiple attributes of the Image Augmentation List in the DataRobot backend as well on this object.

Parameters

- name** [Optional[str]] New name of the feature list.
- feature_name** [Optional[str]] The new feature name for which the Image Augmentation List is effective.
- initial_list** [Optional[bool]] New flag that indicates whether this list will be used during Autopilot to perform image augmentation.
- transformation_probability** [Optional[float]] New probability that each enabled transformation will be applied to an image. This does not apply to Horizontal or Vertical Flip, which are always set to 50%.
- number_of_new_images** [Optional[int]] New number of new rows to add for each existing row, updating the existing augmentation list.
- transformations** [Optional[list]] New list of Transformations to possibly apply to each image.

Returns

ImageAugmentationList Reference to self. The passed values will be updated in place.

retrieve_samples () → List[datarobot.models.visualai.augmentation.ImageAugmentationSample]
Lists already computed image augmentation sample for image augmentation list. Returns samples only if they have been already computed. It does not initialize computation.

Returns

List of class **ImageAugmentationSample**

compute_samples (*max_wait: int = 600*) → List[datarobot.models.visualai.augmentation.ImageAugmentationSample]
Initializes computation and retrieves list of image augmentation samples for image augmentation list. If samples exited prior to this call method, this will compute fresh samples and return latest version of samples.

Returns

List of class **ImageAugmentationSample**

```
class datarobot.models.visualai.ImageAugmentationSample (image_id: str, project_id: str, height: int, width: int, original_image_id: Optional[str] = None, sample_id: Optional[str] = None)
```

A preview of the type of images that augmentations will create during training.

Attributes

- sample_id** [ObjectId] The id of the augmentation sample, used to group related images together
- image_id** [ObjectId] A reference to the Image which can be used to retrieve the image binary
- project_id** [ObjectId] A reference to the project containing the image
- original_image_id** [ObjectId] A reference to the original image that generated this image in the case of an augmented image. If this is None it signifies this is an original image
- height** [int] Image height in pixels
- width** [int] Image width in pixels

classmethod `list` (*auglist_id: Optional[str] = None*) → List[datarobot.models.visualai.augmentation.ImageAugmentationSample]
Return a list of ImageAugmentationSample objects.

Parameters

auglist_id: str ID for augmentation list to retrieve samples for

Returns

List of class **ImageAugmentationSample**

2.3.55 Word Cloud

class `datarobot.models.word_cloud.WordCloud` (*ngrams: List[WordCloudNgram]*)

Word cloud data for the model.

Notes

WordCloudNgram is a dict containing the following:

- `ngram` (str) Word or ngram value.
- `coefficient` (float) Value from [-1.0, 1.0] range, describes effect of this ngram on the target. Large negative value means strong effect toward negative class in classification and smaller target value in regression models. Large positive - toward positive class and bigger value respectively.
- `count` (int) Number of rows in the training sample where this ngram appears.
- `frequency` (float) Value from (0.0, 1.0] range, relative frequency of given ngram to most frequent ngram.
- `is_stopword` (bool) True for ngrams that DataRobot evaluates as stopwords.
- `class` (str or None) For classification - values of the target class for corresponding word or ngram. For regression - None.

Attributes

ngrams [list of dicts] List of dicts with schema described as WordCloudNgram above.

most_frequent (*top_n: Optional[int] = 5*) → List[WordCloudNgram]

Return most frequent ngrams in the word cloud.

Parameters

top_n [int] Number of ngrams to return

Returns

list of dict Up to top_n top most frequent ngrams in the word cloud. If top_n bigger than total number of ngrams in word cloud - return all sorted by frequency in descending order.

most_important (*top_n: Optional[int] = 5*) → List[WordCloudNgram]

Return most important ngrams in the word cloud.

Parameters

top_n [int] Number of ngrams to return

Returns

list of dict Up to top_n top most important ngrams in the word cloud. If top_n bigger then total number of ngrams in word cloud - return all sorted by absolute coefficient value in descending order.

ngrams_per_class () → Dict[Optional[str], List[WordCloudNgram]]
Split ngrams per target class values. Useful for multiclass models.

Returns

dict Dictionary in the format of (class label) -> (list of ngrams for that class)

2.3.56 Experimental API features

These features all require special permissions to be activated on your DataRobot account, and will not work otherwise. If you want to test a feature, please ask your DataRobot CFDS or account manager about enrolling in our preview program.

Classes in this list should be considered “experimental”, not fully released, and likely to change in future releases. **Do not use them for production systems or other mission-critical uses.**

```
class datarobot._experimental.helpers.partitioning_methods.DatetimePartitioning(project_id=Non  
    date-  
    time_partitionin  
    date-  
    time_partition_  
    date_format=N  
    au-  
    topi-  
    lot_data_select  
    val-  
    i-  
    da-  
    tion_duration=  
    avail-  
    able_training_s  
    avail-  
    able_training_c  
    avail-  
    able_training_r  
    avail-  
    able_training_e  
    pri-  
    mary_training_  
    pri-  
    mary_training_  
    pri-  
    mary_training_  
    pri-  
    mary_training_  
    gap_start_date:  
    gap_duration=  
    gap_row_count  
    gap_end_date=  
    dis-  
    able_holdout=l  
    hold-  
    out_start_date=  
    hold-  
    out_duration=N  
    hold-  
    out_row_count:  
    hold-  
    out_end_date=  
    num-  
    ber_of_backtes  
    back-  
    tests=None,  
    to-  
    tal_row_count=  
    use_time_series  
    de-  
    fault_to_known  
    de-  
    fault_to_do_nor  
    fea-  
    ture_derivation  
    fea-  
    ture_derivation  
    fea-  
    ture_settings=N
```

classmethod `datetime_partitioning_log_retrieve` (*project_id: str, datetime_partitioning_id: str*) → Any

Retrieve the datetime partitioning log content for an optimized datetime partitioning.

The Datetime Partitioning Log provides details about the partitioning process for an OTV or Time Series project.

Parameters

project_id [str] project id of the project associated with the datetime partitioning.

datetime_partitioning_id [str] id of the optimized datetime partitioning

classmethod `get_input_data` (*project_id: str, datetime_partitioning_id: str*) → datarobot.helpers.partitioning_methods.DatetimePartitioningSpecification

Retrieve the input used to create an Optimized DatetimePartitioning from a project for the specified datetime_partitioning_id. A datetime_partitioning_id is created by using the *generate_optimized* function.

Parameters

project_id [str] the id of the project to retrieve partitioning for

datetime_partitioning_id [ObjectId] the ObjectId associated with the project to retrieve from mongo

Returns

DatetimePartitioningInput [the input to optimized datetime partitioning]

class datarobot._experimental.helpers.partitioning_methods.**DatetimePartitioningId** (*datetime_partitioning_id: str, project_id: str*)

Defines a DatetimePartitioningId used for datetime partitioning.

This class only includes the `datetime_partitioning_id` that identifies a previously optimized datetime partitioning and the `project_id` for the associated project.

This is the specification that should be passed to *Project.analyze_and_model* via the `partitioning_method` parameter. To see the full partitioning use *DatetimePartitioning.get_optimized*.

Attributes

datetime_partitioning_id [str] the id of the datetime partitioning to use

project_id [str] the id of the project the datetime partitioning is associated with

collect_payload () → Dict[str, Any]

Set up the dict that should be sent to the server when setting the target Returns `partitioning_spec`: dict

prep_payload (*project_id: str, max_wait: int = 600*) → None

Run any necessary validation and prep of the payload, including async operations

Mainly used for the datetime partitioning spec but implemented in general for consistency

update (***kwargs*) → NoReturn

Update this instance, matching attributes to kwargs

Mainly used for the datetime partitioning spec but implemented in general for consistency

```
class datarobot._experimental.models.model.Model (id=None, processes=None, featurelist_name=None, featurelist_id=None, project_id=None, sample_pct=None, training_row_count=None, training_duration=None, training_start_date=None, training_end_date=None, model_type=None, model_category=None, is_frozen=None, is_n_clusters_dynamically_determined=None, blueprint_id=None, metrics=None, project=None, monotonic_increasing_featurelist_id=None, monotonic_decreasing_featurelist_id=None, n_clusters=None, has_empty_clusters=None, supports_monotonic_constraints=None, is_starred=None, prediction_threshold=None, prediction_threshold_read_only=None, model_number=None, parent_model_id=None, use_project_settings=None, supports_composable_ml=None)
```

get_feature_effect (*source, include_ice_plots=False*)

Retrieve Feature Effects for the model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with *request_feature_effect*.

See *get_feature_effect_metadata* for retrieving information the available sources.

Parameters

source [string] The source Feature Effects are retrieved for.

include_ice_plots: bool, optional Indicates whether Individual Conditional Expectation (ICE) plots should be returned.

Returns

feature_effects [FeatureEffects] The feature effects data.

Raises

ClientError (404) If the feature effects have not been computed or source is not valid value.

```

class datarobot._experimental.models.model.DatetimeModel (id=None,          pro-
                                                           cesses=None,          fea-
                                                           turelist_name=None,
                                                           featurelist_id=None,
                                                           project_id=None, sam-
                                                           ple_pct=None, train-
                                                           ing_row_count=None,
                                                           training_duration=None,
                                                           train-
                                                           ing_start_date=None,
                                                           train-
                                                           ing_end_date=None,
                                                           time_window_sample_pct=None,
                                                           sampling_method=None,
                                                           model_type=None,
                                                           model_category=None,
                                                           is_frozen=None,
                                                           blueprint_id=None,
                                                           metrics=None, train-
                                                           ing_info=None,
                                                           holdout_score=None,
                                                           holdout_status=None,
                                                           data_selection_method=None,
                                                           backtests=None, mono-
                                                           tonic_increasing_featurelist_id=None,
                                                           mono-
                                                           tonic_decreasing_featurelist_id=None,
                                                           sup-
                                                           ports_monotonic_constraints=None,
                                                           is_starred=None, pre-
                                                           diction_threshold=None,
                                                           predic-
                                                           tion_threshold_read_only=None,
                                                           effec-
                                                           tive_feature_derivation_window_start=None,
                                                           effec-
                                                           tive_feature_derivation_window_end=None,
                                                           fore-
                                                           cast_window_start=None,
                                                           fore-
                                                           cast_window_end=None,
                                                           win-
                                                           dows_basis_unit=None,
                                                           model_number=None,
                                                           parent_model_id=None,
                                                           use_project_settings=None,
                                                           sup-
                                                           ports_composable_ml=None,
                                                           n_clusters=None,
                                                           is_n_clusters_dynamically_determined=None)

```

get_feature_effect (*source, backtest_index, include_ice_plots=False*)

Retrieve Feature Effects for the model.

Feature Effects provides partial dependence and predicted vs actual values for top-500 features ordered by

feature impact score.

The partial dependence shows marginal effect of a feature on the target variable after accounting for the average effects of all other predictive features. It indicates how, holding all other variables except the feature of interest as they were, the value of this feature affects your prediction.

Requires that Feature Effects has already been computed with `request_feature_effect`.

See `get_feature_effect_metadata` for retrieving information of source, `backtest_index`.

Parameters

source: **string** The source Feature Effects are retrieved for. One value of [FeatureEffectMetadataDatetime.sources]. To retrieve the available sources for feature effect.

backtest_index: **string, FeatureEffectMetadataDatetime.backtest_index.** The backtest index to retrieve Feature Effects for.

include_ice_plots: **bool, optional** Indicates whether Individual Conditional Expectation (ICE) plots should be returned.

Returns

feature_effects: **FeatureEffects** The feature effects data.

Raises

ClientError (404) If the feature effects have not been computed or source is not valid value.

```
class datarobot._experimental.models.documentai.document.DocumentPageFile (document_page_id:
                                                                    str,
                                                                    project_id:
                                                                    Op-
                                                                    tional[str]
                                                                    =
                                                                    None,
                                                                    height:
                                                                    int
                                                                    =
                                                                    0,
                                                                    width:
                                                                    int
                                                                    =
                                                                    0,
                                                                    down-
                                                                    load_link:
                                                                    Op-
                                                                    tional[str]
                                                                    =
                                                                    None)
```

Page of a document as an image file.

Attributes

project_id [str] ID of the project record belongs to.

document_page_id [str] ID of the document page.

height [int] Height of the document thumbnail in pixels.

width [int] Width of the document thumbnail in pixels.

thumbnail_bytes [bytes] Document thumbnail as bytes.

`mime_type` [str] Mime image type of the document thumbnail.

`thumbnail_bytes`

Document thumbnail as bytes.

Returns

bytes Document thumbnail.

`mime_type`

Mime image type of the document thumbnail. Example: `image/png`

Returns

str Mime image type of the document thumbnail.

```
class datarobot._experimental.models.documentai.document.DocumentThumbnail (project_id:
    str,
    doc-
    u-
    ment_page_id:
    str,
    height:
    int
    =
    0,
    width:
    int
    =
    0,
    tar-
    get_value:
    Union[str,
    int,
    float,
    List[str],
    None]
    =
    None)
```

Thumbnail of document from the project's dataset.

If `Project.stage` is `datarobot.enums.PROJECT_STAGE.EDA2` and it is a supervised project then the `target_*` attributes of this class will have values, otherwise the values will all be `None`.

Attributes

document: Document Document object.

project_id [str] ID of the project record belongs to.

target_value: str Target value used for filtering thumbnails.

```
classmethod list (project_id: str, feature_name: str, target_value: Optional[str] =
    None, offset: Optional[int] = None, limit: Optional[int] = None) →
    List[datarobot._experimental.models.documentai.document.DocumentThumbnail]
    Get document thumbnails from a project.
```

Parameters

project_id [str] ID of the project record belongs to.

feature_name [str] Name of feature column that contains document type.

target_value [Optional[str], default None] Target value to filter thumbnails.

offset [Optional[int], default None] Number of documents to be skipped.

limit [Optional[int], default None] Number of document thumbnails to return.

Returns

documents [List[DocumentThumbnail]] List of DocumentThumbnail objects each representing a single document.

Notes

Actual document thumbnails are not fetched from the server by this method but just DocumentPageFile object constructs that when accessed later on will fetch the thumbnail on demand (lazy loading).

Examples

Fetch document thumbnails for the given project_id and feature_name.

```
from datarobot._experimental.models.documentai.document import DocumentThumbnail

# fetch 5 documents from EDA SAMPLE for specified project and specific feature
document_thumbs = DocumentThumbnail.list(project_id, feature_name, limit=5)

# fetch 5 documents for specified project with target value filtering
# this option is only available after project target was selected and modeling started
target1_thumbs = DocumentThumbnail.list(project_id, feature_name, target_value='target1', limit=5)
```

Preview the document thumbnail.

```
from datarobot._experimental.models.documentai.document import DocumentThumbnail
from datarobot.helpers.image_utils import get_image_from_bytes

# fetch 3 documents
document_thumbs = DocumentThumbnail.list(project_id, feature_name, limit=3)

for doc_thumb in document_thumbs:
    thumbnail = get_image_from_bytes(doc_thumb.document.thumbnail_bytes)
    thumbnail.show()
```

class datarobot._experimental.models.documentai.document.DocumentTextExtractionSample
Stateless class for computing and retrieving Document Text Extraction Samples.

Notes

Actual document text extraction samples are not fetched from the server in the moment of a function call. Detailed information on the documents, the pages and the rendered images of them are fetched when accessed on demand (lazy loading).

Examples

1) Compute text extraction samples for specific model, and fetch all existing document text extraction samples for specific project.

```
from datarobot._experimental.models.documentai.document import DocumentTextExtractionSample

SPECIFIC_MODEL_ID1 = "model_id1"
SPECIFIC_MODEL_ID2 = "model_id2"
SPECIFIC_PROJECT_ID = "project_id"

# Order computation of document text extraction sample for specific model.
# By default `compute` method will await for computation to end before returning
DocumentTextExtractionSample.compute(SPECIFIC_MODEL_ID1, await_completion=False)
DocumentTextExtractionSample.compute(SPECIFIC_MODEL_ID2)

samples = DocumentTextExtractionSample.list_features_with_samples(SPECIFIC_PROJECT_ID)
```

2) Fetch document text extraction samples for specific *model_id* and *feature_name* and display all document sample pages.

```
from datarobot._experimental.models.documentai.document import DocumentTextExtractionSample
from datarobot.helpers.image_utils import get_image_from_bytes

SPECIFIC_MODEL_ID = "model_id"
SPECIFIC_FEATURE_NAME = "feature_name"

samples = DocumentTextExtractionSample.list_pages(
    model_id=SPECIFIC_MODEL_ID,
    feature_name=SPECIFIC_FEATURE_NAME
)
for sample in samples:
    thumbnail = sample.document_page.thumbnail
    image = get_image_from_bytes(thumbnail.thumbnail_bytes)
    image.show()
```

3) Fetch document text extraction samples for specific *model_id* and *feature_name* and display text extraction details for the first page. This example displays the image of the document with bounding boxes of detected text lines. It also returns a list of all text lines extracted from page along with their coordinates.

```
from datarobot._experimental.models.documentai.document import DocumentTextExtractionSample

SPECIFIC_MODEL_ID = "model_id"
SPECIFIC_FEATURE_NAME = "feature_name"

samples = DocumentTextExtractionSample.list_pages(SPECIFIC_MODEL_ID, SPECIFIC_FEATURE_NAME)
# Draw bounding boxes for first document page sample and display related text data.
image = samples[0].get_document_page_with_text_locations()
image.show()
# for each text block represented as bounding box object drawn on original image
# display its coordinates (top, left, bottom, right) and extracted text value
```

(continues on next page)

(continued from previous page)

```
for text_line in samples[0].text_lines:
    print(text_line)
```

classmethod compute (*model_id: str, await_completion: bool = True, max_wait: int = 600*) → None

Starts computation of document text extraction samples for the model and if successful, returns computed text samples for it. This method allows calculation to continue for a specified time and if not complete, cancels the request.

Parameters

model_id: str ID of the project model to begin creation of cluster insights for.

await_completion: bool Should method wait for completion before exiting.

max_wait: int (default=600) Maximum number of seconds to wait for request to finish processing before raising `AsyncTimeoutError`.

Raises

ClientError Server rejected creation due to client error. Most likely cause is bad *model_id*.

AsyncFailureError Indicates whether any of the responses from the server are unexpected.

AsyncProcessUnsuccessfulError Indicates whether the cluster insights computation failed or was cancelled.

AsyncTimeoutError Indicates whether the cluster insights computation did not resolve within the specified time limit (*max_wait*).

classmethod list_features_with_samples (*project_id: str*) →

List[`datarobot._experimental.models.documentai.document.FeaturesWithSamples`]

Returns a list of feature - *model_id* pairs with computed document text extraction samples.

Parameters

project_id: str Project ID to retrieve list of computed samples for

Returns

List[`FeaturesWithSamples`]

classmethod list_pages (*model_id: str, feature_name: str, document_index: Optional[int] = None, document_task: Optional[str] = None*) →

List[`datarobot._experimental.models.documentai.document.DocumentTextExtractionSamplePage`]

Returns list of document text extraction sample pages.

Parameters

model_id: str Model ID

feature_name: str Specific feature name to retrieve.

document_index: Optional[int] Default None. Specific document index to retrieve.

document_task: Optional[str] Document Blueprint task

Returns

List[`DocumentTextExtractionSamplePage`]

classmethod list_documents (*model_id: str, feature_name: str*) →

List[`datarobot._experimental.models.documentai.document.DocumentTextExtractionSamplePage`]

Returns list of documents used for text extraction.

Parameters

model_id: str Model ID

feature_name: str Feature name

Returns

List[DocumentTextExtractionSampleDocument]

```
class datarobot._experimental.models.documentai.document.DocumentTextExtractionSampleDocument
```

Document text extraction source.

Holds data about feature and model prediction values, as well as the thumbnail of the document.

Attributes

document_index: int Index of document page sample

feature_name: str Name of feature that document text extraction sample is related to

thumbnail_id: str Document page ID

thumbnail_width: int Thumbnail image width

thumbnail_height: int Thumbnail image height

thumbnail_link: str Thumbnail image download link

document_task: str Document blueprint task this document belongs to

actual_target_value: Optional[Union[str, int, List[str]]] Actual target value

prediction: Optional[PredictionType] Prediction values and labels

classmethod list (*model_id: str, feature_name: str, document_task: Optional[str] = None*) →

List[datarobot._experimental.models.documentai.document.DocumentTextExtractionSampleDocument]

List available documents with document text extraction samples.

Parameters

model_id: str Id of a model

feature_name: str Name of the feature

document_task: Optional[str] Document Blueprint task

Returns

List[DocumentTextExtractionSampleDocument]

```
class datarobot._experimental.models.documentai.document.DocumentTextExtractionSamplePage (p
```

Document text extraction sample covering one document page.

Holds data about the document page, the recognized text and the location of the text in the document page.

Attributes

page_index: int Index of the page inside the document

document_index: int Index of the document inside the dataset

feature_name: str Name of feature that document text extraction sample is related to

document_page_id: str Document page ID

document_page_width: int Document page width

document_page_height: int Document page height

document_page_link: str Document page link to download the document page image

text_lines: List[Dict[str, Union[int, str]]] List of text lines and their coordinates

document_task: str Document Blueprint task this page belongs to

actual_target_value: Optional[Union[str, int, List[str]]] Actual target value

prediction: Optional[PredictionType] Prediction values and labels

```
classmethod list (model_id: str, feature_name: str, document_index: Optional[int] = None, document_task: Optional[str] = None) → List[datarobot._experimental.models.documentai.document.DocumentTextExtractionSamplePage]
```

Returns list of document text extraction sample pages.

Parameters

model_id: str Model ID to retrieve document text extraction page samples.

feature_name: str Feature name to retrieve document text extraction page samples.

document_index: Optional[int] Default None. Specific document index to retrieve.

document_task: Optional[str] Document Blueprint task

Returns

List[DocumentTextExtractionSamplePage]

```
get_document_page_with_text_locations (line_color: str = 'blue', line_width: int = 3, padding: int = 3) → Image
```

Returns the document page with bounding boxes drawn around the text lines as a PIL.Image.

Parameters

line_color: str Default blue. Color to draw bounding box on image page

line_width: int Default 3. Line width of the bounding boxes that will be drawn

padding: int Default 3. Additional space left between the text and the bounding box in pixels

Returns

Image Returns PIL.Image with drawn text bounding boxes

```
class datarobot._experimental.models.retraining.RetrainingPolicy (id: str, name: str, description: Optional[str] = None)
```

Retraining Policy.

Attributes

policy_id [str] ID of the retraining policy

name [str] Name of the retraining policy

description [str] Description of the retraining policy

classmethod list (*deployment_id: str*) → List[datarobot._experimental.models.retraining.RetrainingPolicy]
Lists all retraining policies associated with a deployment

Parameters

deployment_id [str] Id of the deployment

Returns

policies [list] List of retraining policies associated with a deployment

Examples

```
from datarobot import Deployment
from datarobot._experimental.models.retraining import RetrainingPolicy
deployment = Deployment.get(deployment_id='620ed0e37b6ce03244f19631')
RetrainingPolicy.list(deployment.id)
>>> [RetrainingPolicy('620ed248bb0a1f5889eb6aa7'), RetrainingPolicy(
↳ '624f68be8828ed81bf487d8d')]
```

classmethod get (*deployment_id: str, retraining_policy_id: str*) → RetrainingPolicy
Retrieves a retraining policy associated with a deployment

Parameters

deployment_id [str] Id of the deployment

retraining_policy_id [str] Id of the policy

Returns

retraining_policy [Retraining Policy] Retraining policy

Examples

```
from datarobot._experimental.models.retraining import RetrainingPolicy
policy = RetrainingPolicy.get(
    deployment_id='620ed0e37b6ce03244f19631',
    retraining_policy_id='624f68be8828ed81bf487d8d'
)
policy.id
>>> '624f68be8828ed81bf487d8d'
policy.name
>>> 'PolicyA'
```

classmethod delete (*deployment_id: str, retraining_policy_id: str*) → None
Deletes a retraining policy associated with a deployment

Parameters

deployment_id [str] Id of the deployment

retraining_policy_id [str] Id of the policy

Examples

```

from datarobot._experimental.models.retraining import RetrainingPolicy
RetrainingPolicy.delete(
    deployment_id='620ed0e37b6ce03244f19631',
    retraining_policy_id='624f68be8828ed81bf487d8d'
)

```

```

class datarobot._experimental.models.retraining.RetrainingPolicyRun (id: str,
                                                                    sta-
                                                                    tus: str,
                                                                    start_time:
                                                                    str, fin-
                                                                    ish_time:
                                                                    str, chal-
                                                                    lenger_id:
                                                                    Op-
                                                                    tional[str]
                                                                    = None,
                                                                    er-
                                                                    ror_message:
                                                                    Op-
                                                                    tional[str]
                                                                    = None,
                                                                    model_package_id:
                                                                    Op-
                                                                    tional[str]
                                                                    = None,
                                                                    project_id:
                                                                    Op-
                                                                    tional[str]
                                                                    = None)

```

Retraining policy run.

Attributes

policy_run_id [str] ID of the retraining policy run

status [str] Status of the retraining policy run

challenger_id [str] ID of the challenger model retrieved after running the policy

error_message: str The error message if an error occurs during the policy run

model_package_id: str ID of the model package retrieved after the policy is run

project_id: str ID of the project the deployment is associated with

start_time: datetime Timestamp of when the policy run starts

finish_time: datetime Timestamp of when the policy run finishes

```

classmethod list (deployment_id: str, retraining_policy_id: str) →
                  List[datarobot._experimental.models.retraining.RetrainingPolicyRun]
Lists all the retraining policy runs of a retraining policy that is associated with a deployment.

```

Parameters

deployment_id [str] ID of the deployment

retraining_policy_id [str] ID of the policy

Returns

policy runs [list] List of retraining policy runs

Examples

```
from datarobot._experimental.models.retraining import RetrainingPolicyRun
RetrainingPolicyRun.list(
    deployment_id='620ed0e37b6ce03244f19631',
    retraining_policy_id='62f4448f0dfd5699feae3e6e'
)
>>> [RetrainingPolicyRun('620ed248bb0a1f5889eb6aa7'), RetrainingPolicyRun(
↳ '624f68be8828ed81bf487d8d')]
```

2.4 Examples

DataRobot provides an [API user guide](#) that includes overviews, Jupyter notebooks, and task-based tutorials that help you find complete examples of common data science and machine learning workflows using the Python client.

Jupyter notebooks found in the API user guide are downloadable and include sample datasets.

In addition to the examples listed above, DataRobot hosts community-driven notebooks accessible from the following locations:

Resource	Description
Examples for data scientists Github repository	Referential Jupyter notebooks that outline common DataRobot functions.
Tutorials for data scientists Github repository	Jupyter notebooks that detail applicable use cases for DataRobot.

2.5 Changelog

2.5.1 3.1.0

New Features

Enhancements

- Added new methods `BatchPredictionJob.apply_time_series_data_prep_and_score` and `BatchPredictionJob.apply_time_series_data_prep_and_score_to_file` that apply time series data prep to a file or dataset and make batch predictions with a deployment.
- Added new methods `DataEngineQueryGenerator.prepare_prediction_dataset` and `DataEngineQueryGenerator.prepare_prediction_dataset_from_catalog` that apply time series data prep to a file or catalog dataset and upload the prediction dataset to a project.
- Added new `max_wait` parameter to method `Project.create_from_dataset`. Values larger than the default can be specified to avoid timeouts when creating a project from Dataset.
- Added new method for creating a segmented modeling project from an existing clustering project and model `Project.create_segmented_project_from_clustering_model`. Please switch to this function if you are previously using `ModelPackage` for segmented modeling purposes.

- Added new method `is_unsupervised_clustering_or_multiclass` for checking whether the clustering or multi-class parameters are used, quick and efficient without extra API calls. `PredictionExplanations.is_unsupervised_clustering_or_multiclass`
- Retry idempotent requests which result in HTTP 502 and HTTP 504 (in addition to the previous HTTP 413, HTTP 429 and HTTP 503)
- Added value `PREPARED_FOR_DEPLOYMENT` to the `RECOMMENDED_MODEL_TYPE` enum
- Added two new methods to the `ImageAugmentationList` class: `ImageAugmentationList.list`, `ImageAugmentationList.update`

Bugfixes

- Added `format` key to Batch Prediction intake and output settings for S3, GCP and Azure

API Changes

- The method `PredictionExplanations.is_multiclass` now adds an additional API call to check for multiclass target validity, which adds a small delay.
- `AdvancedOptions` parameter `blend_best_models` defaults to `false`
- `AdvancedOptions` parameter `consider_blenders_in_recommendation` defaults to `false`
- `DatetimePartitioning` has parameter `unsupervised_mode`

Deprecation Summary

- Deprecated method `Project.create_from_hdfs`.
- Deprecated method `DatetimePartitioning.generate`.
- Deprecated parameter `in_use` from `ImageAugmentationList.create` as DataRobot will take care of it automatically.
- Deprecated property `Deployment.capabilities` from `Deployment`.
- `ImageAugmentationSample.compute` was removed in v3.1. You can get the same information with the method `ImageAugmentationList.compute_samples`.
- `sample_id` parameter removed from `ImageAugmentationSample.list`. Please use `auglist_id` instead.

Configuration Changes

Experimental changes

- Added `DatetimePartitioning.datetime_partitioning_log_retrieve` to download the datetime partitioning log.
- Added `DatetimePartitioning.get_input_data` to retrieve the input data used to create an optimized datetime partitioning.
- Added `DatetimePartitioningId`, which can be passed as a `partitioning_method` to `Project.analyze_and_model`.

Documentation Changes

- Update the documentation to suggest that setting `use_backtest_start_end_format` of `DatetimePartitioning.to_specification` to `True` will mirror the same behavior as the Web UI.
- Update the documentation to suggest setting `use_start_end_format` of `Backtest.to_specification` to `True` will mirror the same behavior as the Web UI.

2.5.2 3.0.3

Bugfixes

- Fixed an issue affecting backwards compatibility in `datarobot.models.DatetimeModel`, where an unexpected keyword from the DataRobot API would break class deserialization.

2.5.3 3.0.2

Bugfixes

- Restored `Model.get_leaderboard_ui_permalink`, `Model.open_model_browser`, `Project.get_leaderboard_ui_permalink`, and `Project.open_leaderboard_browser`. These methods were accidentally removed instead of deprecated.
- Fix for ipykernel < 6.0.0 which does not persist contextvars across cells

Deprecation Summary

- Deprecated method `Model.get_leaderboard_ui_permalink`. Please use `Model.get_uri` instead.
- Deprecated method `Model.open_model_browser`. Please use `Model.open_in_browser` instead.
- Deprecated method `Project.get_leaderboard_ui_permalink`. Please use `Project.get_uri` instead.
- Deprecated method `Project.open_leaderboard_browser`. Please use `Project.open_in_browser` instead.

2.5.4 3.0.1

Bugfixes

- Added `typing-extensions` as a required dependency for the DataRobot Python SDK.

2.5.5 3.0.0

New Features

- Version 3.0 of the Python client does not support Python 3.6 and earlier versions. Version 3.0 currently supports Python 3.7+.
- The default Autopilot mode for `project.start_autopilot` has changed to Quick mode.

- For datetime-aware models, you can now calculate and retrieve feature impact for backtests other than zero and holdout:
 - `DatetimeModel.get_feature_impact`
 - `DatetimeModel.request_feature_impact`
 - `DatetimeModel.get_or_request_feature_impact`
- Added a `backtest` field to feature impact metadata: `Model.get_or_request_feature_impact`. This field is null for non-datetime-aware models and greater than or equal to zero for holdout in datetime-aware models.
- You can use a new method to retrieve the canonical URI for a project, model, deployment, or dataset:
 - `Project.get_uri`
 - `Model.get_uri`
 - `Deployment.get_uri`
 - `Dataset.get_uri`
- You can use a new method to open a class in a browser based on their URI (project, model, deployment, or dataset):
 - `Project.open_in_browser`
 - `Model.open_in_browser`
 - `Deployment.open_in_browser`
 - `Dataset.open_in_browser`
- Added a new method for opening DataRobot in a browser: `datarobot.rest.RESTClientObject.open_in_browser()`. Invoke the method via `dr.Client().open_in_browser()`.
- Altered method `Project.create_featurelist` to accept five new parameters (please see documentation for information about usage):
 - `starting_featurelist`
 - `starting_featurelist_id`
 - `starting_featurelist_name`
 - `features_to_include`
 - `features_to_exclude`
- Added a new method to retrieve a feature list by name: `Project.get_featurelist_by_name`.
- Added a new convenience method to create datasets: `Dataset.upload`.
- Altered the method `Model.request_predictions` to accept four new parameters:
 - `dataset`
 - `file`
 - `file_path`
 - `dataframe`
 - Note that the method already supports the parameter `dataset_id` and all data source parameters are mutually exclusive.
- Added a new method to `datarobot.models.Dataset`, `Dataset.get_as_dataframe`, which retrieves all the originally uploaded data in a pandas DataFrame.

- Added a new method to `datarobot.models.Dataset`, `Dataset.share`, which allows the sharing of a dataset with another user.
- Added new convenience methods to `datarobot.models.Project` for dealing with partition classes. Both methods should be called before `Project.analyze_and_model`. - `Project.set_partitioning_method` intelligently creates the correct partition class for a regular project, based on input arguments. - `Project.set_datetime_partitioning` creates the correct partition class for a time series project.
- Added a new method to `datarobot.models.Project` `Project.get_top_model` which returns the highest scoring model for a metric of your choice.
- Use the new method `Deployment.predict_batch` to pass a file, file path, or DataFrame to `datarobot.models.Deployment` to easily make batch predictions and return the results as a DataFrame.
- Added support for passing in a credentials ID or credentials data to `Project.create_from_data_source` as an alternative to providing a username and password.
- You can now pass in a `max_wait` value to `AutomatedDocument.generate`.
- Added a new method to `datarobot.models.Project` `Project.get_dataset` which retrieves the dataset used during creation of a project.
- Added two new properties to `datarobot.models.Project`: - `catalog_id` - `catalog_version_id`
- Added a new Autopilot method to `datarobot.models.Project` `Project.analyze_and_model` which allows you to initiate Autopilot or data analysis against data uploaded to DataRobot.
- Added a new convenience method to `datarobot.models.Project` `Project.set_options` which allows you to save `AdvancedOptions` values for use in modeling.
- Added a new convenience method to `datarobot.models.Project` `Project.get_options` which allows you to retrieve saved modeling options.

Enhancements

- Refactored the global singleton client connection (`datarobot.client.Client()`) to use `ContextVar` instead of a global variable for better concurrency support.
- Added support for creating monotonic feature lists for time series projects. Set `skip_datetime_partition_column` to `True` to create monotonic feature list. For more information see `datarobot.models.Project.create_modeling_featurelist()`.
- Added information about vertex to advanced tuning parameters `datarobot.models.Model.get_advanced_tuning_parameters()`.
- Added the ability to automatically use saved `AdvancedOptions` set using `Project.set_options` in `Project.analyze_and_model`.

Bugfixes

- `Dataset.list` no longer throws errors when listing datasets with no owner.
- Fixed an issue with the creation of `BatchPredictionJobDefinitions` containing a schedule.
- Fixed error handling in `datarobot.helpers.partitioning_methods.get_class`.
- Fixed issue with portions of the payload not using camelCasing in `Project.upload_dataset_from_catalog`.

API Changes

- The Python client now outputs a *DataRobotProjectDeprecationWarning* when you attempt to access certain resources (projects, models, deployments, etc.) that are deprecated or disabled as a result of the DataRobot platform's migration to Python 3.
- The Python client now raises a *TypeError* when you try to retrieve a labelwise ROC on a binary model or a binary ROC on a multilabel model.
- The method *Dataset.create_from_data_source* now raises *InvalidUsageError* if *username* and *password* are not passed as a pair together.

Deprecation Summary

- *Model.get_leaderboard_ui_permalink* has been removed. Use *Model.get_uri* instead.
- *Model.open_model_browser* has been removed. Use *Model.open_in_browser* instead.
- *Project.get_leaderboard_ui_permalink* has been removed. Use *Project.get_uri* instead.
- *Project.open_leaderboard_browser* has been removed. Use *Project.open_in_browser* instead.
- Enum *VARIABLE_TYPE_TRANSFORM.CATEGORICAL* has been removed
- Instantiation of *Blueprint* using a dict has been removed. Use *Blueprint.from_data* instead.
- Specifying an environment to use for testing with *CustomModelTest* has been removed.
- *CustomModelVersion*'s *required_metadata* parameter has been removed. Use *required_metadata_values* instead.
- *CustomTaskVersion*'s *required_metadata* parameter has been removed. Use *required_metadata_values* instead.
- Instantiation of *Feature* using a dict has been removed. Use *Feature.from_data* instead.
- Instantiation of *Featurelist* using a dict has been removed. Use *Featurelist.from_data* instead.
- Instantiation of *Model* using a dict, tuple, or the *data* parameter has been removed. Use *Model.from_data* instead.
- Instantiation of *Project* using a dict has been removed. Use *Project.from_data* instead.
- *Project*'s *quickrun* parameter has been removed. Pass *AUTOPILOT_MODE.QUICK* as the mode instead.
- *Project*'s *scaleout_max_train_pct* and *scaleout_max_train_rows* parameters have been removed.
- *ComplianceDocumentation* has been removed. Use *AutomatedDocument* instead.
- The *Deployment* method *create_from_custom_model_image* was removed. Use *Deployment.create_from_custom_model_version* instead.
- *PredictJob.create* has been removed. Use *Model.request_predictions* instead.
- *Model.fetch_resource_data* has been removed. Use *Model.get* instead.
- The class *CustomInferenceImage* was removed. Use *CustomModelVersion* with *base_environment_id* instead.
- *Project.set_target* has been deprecated. Use *Project.analyze_and_model* instead.

Configuration Changes

- Added a context manager `client_configuration` that can be used to change the connection configuration temporarily, for use in asynchronous or multithreaded code.
- Upgraded the `Pillow` library to version 9.2.0. Users installing DataRobot with the `pillow` extra (`pip install datarobot[images]`) should note that this is a required library.

Experimental changes

- Added experimental support for retrieving document thumbnails:
 - `DocumentThumbnail`
 - `DocumentPageFile`
- Added experimental support to retrieve document text extraction samples using:
 - `DocumentTextExtractionSample`
 - `DocumentTextExtractionSamplePage`
 - `DocumentTextExtractionSampleDocument`
- Added experimental deployment improvements: - `RetrainingPolicy` can be used to manage retraining policies associated with a deployment.
- Added an experimental deployment improvement: - Use `RetrainingPolicyRun` to manage retraining policies run for a retraining policy associated with a deployment.
- Added new methods to `RetrainingPolicy`: - Use `RetrainingPolicy.get` to get a retraining policy associated with a deployment. - Use `RetrainingPolicy.delete` to delete a retraining policy associated with a deployment.

2.5.6 2.29.0b0

New Features

- Added support to pass `max_ngram_explanations` parameter in batch predictions that will trigger the compute of text prediction explanations.
 - `BatchPredictionJob.score`
- Added support to pass calculation mode to prediction explanations (`mode` parameter in `PredictionExplanations.create`) as well as batch scoring (`explanations_mode` in `BatchPredictionJob.score`) for multiclass models. Supported modes:
 - `TopPredictionsMode`
 - `ClassListMode`
- Added method `datarobot.CalendarFile.create_calendar_from_dataset()` to the calendar file that allows us to create a calendar from a dataset.
- Added experimental support for `n_clusters` parameter in `Model.train_datetime` and `DatetimeModel.retrain` that allows to specify number of clusters when creating models in Time Series Clustering project.
- Added new parameter `clone` to `datarobot.CombinedModel.set_segment_champion()` that allows to set a new champion model in a cloned model instead of the original one, leaving latter unmodified.
- Added new property `is_active_combined_model` to `datarobot.CombinedModel` that indicates if the selected combined model is currently the active one in the segmented project.

- Added new `datarobot.models.Project.get_active_combined_model()` that allows users to get the currently active combined model in the segmented project.
- Added new parameters `read_timeout` to method `ShapMatrix.get_as_dataframe`. Values larger than the default can be specified to avoid timeouts when requesting large files. `ShapMatrix.get_as_dataframe`
- Added support for bias mitigation with the following methods - `Project.get_bias_mitigated_models` - `Project.apply_bias_mitigation` - `Project.request_bias_mitigation_feature_info` - `Project.get_bias_mitigation_feature_info` and by adding new bias mitigation params - `bias_mitigation_feature_name` - `bias_mitigation_technique` - include `bias_mitigation_feature_as_predictor_variable` to the existing method - `Project.start` and by adding this enum to supply params to some of the above functionality `datarobot.enums.BiasMitigationTechnique`
- Added new property `status` to `datarobot.models.Deployment` that represents model deployment status.
- Added new `Deployment.activate` and `Deployment.deactivate` that allows deployment activation and deactivation
- Added new `Deployment.delete_monitoring_data` to delete deployment monitoring data.

Enhancements

- Added support for specifying custom endpoint URLs for S3 access in batch predictions:
 - `BatchPredictionJob.score`
 - `BatchPredictionJob.score`See: `endpoint_url` parameter.
- Added guide on *working with binary data*
- Added multithreading support to binary data helper functions.
- Binary data helpers image defaults aligned with application's image preprocessing.
- Added the following accuracy metrics to be retrieved for a deployment - TPR, PPV, F1 and MCC *Deployment monitoring*

Bugfixes

- Don't include holdout start date, end date, or duration in datetime partitioning payload when holdout is disabled.
- Moved ICE Plot capabilities of Feature Effects into experimental support. Removed ICE Plot capabilities from Feature Fit.
- Handle undefined `calendar_name` in `CalendarFile.create_calendar_from_dataset`
- Raise `ValueError` for submitted calendar names that are not strings

API Changes

- `version` field is removed from `ImportedModel` object

Deprecation Summary

- Reason Codes objects deprecated in 2.13 version were removed. Please use Prediction Explanations instead.

Configuration Changes

- The upper version constraint on pandas has been removed.

Documentation Changes

- Fixed a minor typo in the example for `Dataset.create_from_data_source`.
- Update the documentation to suggest that `feature_derivation_window_end` of `datarobot.DatetimePartitioningSpecification` class should be a negative or zero.

2.5.7 2.28.0

New Features

- Added new parameter `upload_read_timeout` to `BatchPredictionJob.score` and `BatchPredictionJob.score_to_file` to indicate how many seconds to wait until intake dataset uploads to server. Default value 600s.
- Added the ability to turn off supervised feature reduction for Time Series projects. Option `use_supervised_feature_reduction` can be set in `AdvancedOptions`.
- Allow `maximum_memory` to be input for custom tasks versions. This will be used for setting the limit to which a custom task prediction container memory can grow.
- Added method `datarobot.models.Project.get_multiseries_names()` to the project service which will return all the distinct entries in the multiseries column
- Added new `segmentation_task_id` attribute to `datarobot.models.Project.set_target()` that allows to start project as Segmented Modeling project.
- Added new property `is_segmented` to `datarobot.models.Project` that indicates if project is a regular one or Segmented Modeling project.
- Added method `datarobot.models.Project.restart_segment()` to the project service that allows to restart single segment that hasn't reached modeling phase.
- Added the ability to interact with Combined Models in Segmented Modeling projects. Available with new class: `datarobot.CombinedModel`.

Functionality:

- `datarobot.CombinedModel.get()`
- `datarobot.CombinedModel.get_segments_info()`
- `datarobot.CombinedModel.get_segments_as_dataframe()`
- `datarobot.CombinedModel.get_segments_as_csv()`
- `datarobot.CombinedModel.set_segment_champion()`
- Added the ability to create and retrieve segmentation tasks used in Segmented Modeling projects. Available with new class: `datarobot.SegmentationTask`.

Functionality:

- `datarobot.SegmentationTask.create()`
- `datarobot.SegmentationTask.list()`
- `datarobot.SegmentationTask.get()`
- Added new class: `datarobot.SegmentInfo` that allows to get information on all segments of Segmented modeling projects, i.e. segment project ID, model counts, autopilot status.

Functionality:

- `datarobot.SegmentInfo.list()`
- Added new methods to base `APIObject` to assist with dictionary and json serialization of child objects.

Functionality:

- `APIObject.to_dict`
- `APIObject.to_json`
- Added new methods to `ImageAugmentationList` for interacting with image augmentation samples.

Functionality:

- `ImageAugmentationList.compute_samples`
- `ImageAugmentationList.retrieve_samples`
- Added the ability to set a prediction threshold when creating a deployment from a learning model.
- Added support for governance, owners, predictionEnvironment, and fairnessHealth fields when querying for a Deployment object.
- Added helper methods for working with files, images and documents. Methods support conversion of file contents into base64 string representations. Methods for images provide also image resize and transformation support.

Functionality:

- `datarobot.helpers.binary_data_utils.get_encoded_file_contents_from_urls`.
- `datarobot.helpers.binary_data_utils.get_encoded_file_contents_from_paths`
- `datarobot.helpers.binary_data_utils.get_encoded_image_contents_from_paths`
- `datarobot.helpers.binary_data_utils.get_encoded_image_contents_from_urls`

Enhancements

- Requesting metadata instead of actual data of `datarobot.PredictionExplanations` to reduce the amount of data transfer

Bugfixes

- Fix a bug in `Job.get_result_when_complete` for Prediction Explanations job type to populate all attribute of `datarobot.PredictionExplanations` instead of just one
- Fix a bug in `datarobot.models.ShapImpact` where `row_count` was not optional
- Allow blank value for schema and catalog in `RelationshipsConfiguration` response data

- Fix a bug where credentials were incorrectly formatted in `Project.upload_dataset_from_catalog` and `Project.upload_dataset_from_data_source`
- Rejecting downloads of Batch Prediction data that was not written to the localfile output adapter
- Fix a bug in `datarobot.models.BatchPredictionJobDefinition.create()` where `schedule` was not optional for all cases

API Changes

- **User can include ICE plots data in the response when requesting Feature Effects/Feature Fit. Extended methods are**

- `Model.get_feature_effect`,
- `Model.get_feature_fit`,
- `DatetimeModel.get_feature_effect` and
- `DatetimeModel.get_feature_fit`.

Deprecation Summary

- `attrs` library is removed from library dependencies
- `ImageAugmentationSample.compute` was marked as deprecated and will be removed in v2.30. You can get the same information with newly introduced method `ImageAugmentationList.compute_samples`
- `ImageAugmentationSample.list` using `sample_id`
- Deprecating scaleout parameters for projects / models. Includes `scaleout_modeling_mode`, `scaleout_max_train_pct`, and `scaleout_max_train_rows`

Configuration Changes

- `pandas` upper version constraint is updated to include version 1.3.5.

Documentation Changes

- Fixed `from datarobot.enums import` in Unsupervised Clustering example provided in docs.

2.5.8 2.27.0

New Features

- `datarobot.UserBlueprint` is now mature with full support of functionality. Users are encouraged to use the `Blueprint Workshop` instead of this class directly.
- Added the arguments attribute in `datarobot.CustomTaskVersion`.
- Added the ability to retrieve detected errors in the potentially multicategorical feature types that prevented the feature to be identified as multicategorical. `Project.download_multicategorical_data_format_errors`
- **Added the support of listing/updating user roles on one custom task.**

- `datarobot.CustomTask.get_access_list()`
- `datarobot.CustomTask.share()`

- Added a method `datarobot.models.Dataset.create_from_query_generator()`. This creates a dataset in the AI catalog from a `datarobot.DataEngineQueryGenerator`.
- Added the new functionality of creating a user blueprint with a custom task version id. `datarobot.UserBlueprint.create_from_custom_task_version_id()`.
- The DataRobot Python Client is no longer published under the Apache-2.0 software license, but rather under the terms of the DataRobot Tool and Utility Agreement.
- Added a new class: `datarobot.DataEngineQueryGenerator`. This class generates a Spark SQL query to apply time series data prep to a dataset in the AI catalog.

Functionality:

- `datarobot.DataEngineQueryGenerator.create()`
- `datarobot.DataEngineQueryGenerator.get()`
- `datarobot.DataEngineQueryGenerator.create_dataset()`

See the *time series data prep documentation* for more information.

- Added the ability to upload a prediction dataset into a project from the AI catalog `Project.upload_dataset_from_catalog`.
- Added the ability to specify the number of training rows to use in SHAP based Feature Impact computation. Extended method:
 - `ShapImpact.create`
- Added the ability to retrieve and restore features that have been reduced using the time series feature generation and reduction functionality. The functionality comes with a new class: `datarobot.models.restore_discarded_features.DiscardedFeaturesInfo`.

Functionality:

- `datarobot.models.restore_discarded_features.DiscardedFeaturesInfo.retrieve()`
- `datarobot.models.restore_discarded_features.DiscardedFeaturesInfo.restore()`

- Added the ability to control class mapping aggregation in multiclass projects via `ClassMappingAggregationSettings` passed as a parameter to `Project.set_target`
- Added support for *unsupervised clustering projects*
- Added the ability to compute and retrieve Feature Effects for a Multiclass model using `datarobot.models.Model.request_feature_effects_multiclass()`, `datarobot.models.Model.get_feature_effects_multiclass()` or `datarobot.models.Model.get_or_request_feature_effects_multiclass()` methods. For datetime models use following methods `datarobot.models.DatetimeModel.request_feature_effects_multiclass()`, `datarobot.models.DatetimeModel.get_feature_effects_multiclass()` or `datarobot.models.DatetimeModel.get_or_request_feature_effects_multiclass()` with `backtest_index` specified
- Added the ability to get and update challenger model settings for deployment class: `datarobot.models.Deployment`

Functionality:

- `datarobot.models.Deployment.get_challenger_models_settings()`
- `datarobot.models.Deployment.update_challenger_models_settings()`

- Added the ability to get and update segment analysis settings for deployment class: `datarobot.models.Deployment`

Functionality:

- `datarobot.models.Deployment.get_segment_analysis_settings()`
- `datarobot.models.Deployment.update_segment_analysis_settings()`

- Added the ability to get and update predictions by forecast date settings for deployment class: `datarobot.models.Deployment`

Functionality:

- `datarobot.models.Deployment.get_predictions_by_forecast_date_settings()`
- `datarobot.models.Deployment.update_predictions_by_forecast_date_settings()`

- Added the ability to specify multiple feature derivation windows when creating a Relationships Configuration using `RelationshipsConfiguration.create`

- Added the ability to manipulate a legacy conversion for a custom inference model, using the class: `CustomModelVersionConversion`

Functionality:

- `CustomModelVersionConversion.run_conversion`
- `CustomModelVersionConversion.stop_conversion`
- `CustomModelVersionConversion.get`
- `CustomModelVersionConversion.get_latest`
- `CustomModelVersionConversion.list`

Enhancements

- `Project.get` returns the `query_generator_id` used for time series data prep when applicable.
- Feature Fit & Feature Effects can return `datetime` instead of `numeric` for `feature_type` field for numeric features that are derived from dates.
- These methods now provide additional field `rowCount` in SHAP based Feature Impact results.

- `ShapImpact.create`
- `ShapImpact.get`

- **Improved performance when downloading prediction dataframes for Multilabel projects using:**

- `Predictions.get_all_as_dataframe`
- `PredictJob.get_predictions`
- `Job.get_result`

Bugfixes

- fix `datarobot.CustomTaskVersion` and `datarobot.CustomModelVersion` to correctly format `required_metadata_values` before sending them via API
- Fixed response validation that could cause `DataError` when using `datarobot.models.Dataset` for a dataset with a description that is an empty string.

API Changes

- `RelationshipsConfiguration.create` will include a new key `data_source_id` in `data_source` field when applicable

Deprecation Summary

- `Model.get_all_labelwise_roc_curves` has been removed. You can get the same information with multiple calls of `Model.get_labelwise_roc_curves`, one per data source.
- `Model.get_all_multilabel_lift_charts` has been removed. You can get the same information with multiple calls of `Model.get_multilabel_lift_charts`, one per data source.

Configuration Changes

Documentation Changes

- This release introduces a new documentation organization. The organization has been modified to better reflect the end-to-end modeling workflow. The new `Tutorials` section has 5 major topics that outline the major components of modeling: Data, Modeling, Predictions, MLOps, and Administration.
- The Getting Started workflow is now hosted at [DataRobot's API Documentation Home](#).
- Added an example of how to set up optimized datetime partitioning for time series projects.

2.5.9 2.26.0

New Features

- Added the ability to use external baseline predictions for time series project. External dataset can be validated using `datarobot.models.Project.validate_external_time_series_baseline()`. Option can be set in `AdvancedOptions` to scale datarobot models' accuracy performance using external dataset's accuracy performance. See the [external baseline predictions documentation](#) for more information.
- Added the ability to generate exponentially weighted moving average features for time series project. Option can be set in `AdvancedOptions` and controls the alpha parameter used in exponentially weighted moving average operation.
- Added the ability to request a specific model be prepared for deployment using `Project.start_prepare_model_for_deployment`.
- Added a new class: `datarobot.CustomTask`. This class is a custom task that you can use as part (or all) of your blue print for training models. It needs `datarobot.CustomTaskVersion` before it can properly be used.

Functionality:

- **Create, copy, update or delete:**
 - * `datarobot.CustomTask.create()`
 - * `datarobot.CustomTask.copy()`
 - * `datarobot.CustomTask.update()`
 - * `datarobot.CustomTask.delete()`
- **list, get and refresh current tasks:**
 - * `datarobot.CustomTask.get()`
 - * `datarobot.CustomTask.list()`
 - * `datarobot.CustomTask.refresh()`
- **Download the latest `datarobot.CustomTaskVersion` of the `datarobot.CustomTask`**
 - * `datarobot.CustomTask.download_latest_version()`
- Added a new class: `datarobot.CustomTaskVersion`. This class is for management of specific versions of a custom task.

Functionality:

- **Create new custom task versions:**
 - * `datarobot.CustomTaskVersion.create_clean()`
 - * `datarobot.CustomTaskVersion.create_from_previous()`
- **list, get and refresh current available versions:**
 - * `datarobot.CustomTaskVersion.list()`
 - * `datarobot.CustomTaskVersion.get()`
 - * `datarobot.CustomTaskVersion.refresh()`
- `datarobot.CustomTaskVersion.download()` will download a tarball of the files used to create the custom task
- `datarobot.CustomTaskVersion.update()` updates the metadata for a custom task.
- Added the ability compute batch predictions for an in-memory DataFrame using `BatchPredictionJob.score`
- Added the ability to specify feature discovery settings when creating a Relationships Configuration using `RelationshipsConfiguration.create`

Enhancements

- **Improved performance when downloading prediction dataframes using:**
 - `Predictions.get_all_as_dataframe`
 - `PredictJob.get_predictions`
 - `Job.get_result`
- **Added new `max_wait` parameter to methods:**
 - `Dataset.create_from_url`
 - `Dataset.create_from_in_memory_data`

- `Dataset.create_from_data_source`
- `Dataset.create_version_from_in_memory_data`
- `Dataset.create_version_from_url`
- `Dataset.create_version_from_data_source`

Bugfixes

- `Model.get` will return a `DatetimeModel` instead of `Model` whenever the project is datetime partitioned. This enables the `ModelRecommendation.get_model` to return a `DatetimeModel` instead of `Model` whenever the project is datetime partitioned.
- Try to read Feature Impact result if existing `jobId` is `None` in `Model.get_or_request_feature_impact`.
- Set upper version constraints for pandas.
- `RelationshipsConfiguration.create` will return a catalog in `data_source` field
- Argument `required_metadata_keys` was not properly being sent in the update and create requests for `datarobot.ExecutionEnvironment`.
- Fix issue with `datarobot.ExecutionEnvironment` create method failing when used against older versions of the application
- `datarobot.CustomTaskVersion` was not properly handling `required_metadata_values` from the API response

API Changes

- Updated `Project.start` to use `AUTOPILOT_MODE.QUICK` when the `autopilot_on` param is set to `True`. This brings it in line with `Project.set_target`.
- Updated `project.start_autopilot` to accept the following new GA parameters that are already in the public API: `consider_blenders_in_recommendation`, `run_leakage_removed_feature_list`

Deprecation Summary

- The `required_metadata` property of `datarobot.CustomModelVersion` has been deprecated. `required_metadata_values` should be used instead.
- The `required_metadata` property of `datarobot.CustomTaskVersion` has been deprecated. `required_metadata_values` should be used instead.

Configuration Changes

- Now requires dependency on package `scikit-learn` rather than `sklearn`. Note: This dependency is only used in example code. See [this scikit-learn issue](#) for more information.
- Now permits dependency on package `attrs` to be less than version 21. This fixes compatibility with `apache-airflow`.
- Allow to setup `Authorization: <type> <token>` type header for OAuth2 Bearer tokens.

Documentation Changes

- Update the documentation with respect to the permission that controls AI Catalog dataset snapshot behavior.

2.5.10 2.25.0

New Features

- There is a new *AnomalyAssessmentRecord* object that implements public API routes to work with anomaly assessment insight. This also adds explanations and predictions preview classes. The insight is available for anomaly detection models in time series unsupervised projects which also support calculation of Shapley values.
 - *AnomalyAssessmentPredictionsPreview*
 - *AnomalyAssessmentExplanations*

Functionality:

- Initialize an anomaly assessment insight for the specified subset.
 - * *DatetimeModel.initialize_anomaly_assessment*
- Get anomaly assessment records, shap explanations, predictions preview:
 - * *DatetimeModel.get_anomaly_assessment_records* list available records
 - * *AnomalyAssessmentRecord.get_predictions_preview* get predictions preview for the record
 - * *AnomalyAssessmentRecord.get_latest_explanations* get latest predictions along with shap explanations for the most anomalous records.
 - * *AnomalyAssessmentRecord.get_explanations* get predictions along with shap explanations for the most anomalous records for the specified range.
- Delete anomaly assessment record:
 - * *AnomalyAssessmentRecord.delete* delete record
- Added an ability to calculate and retrieve Datetime trend plots for *DatetimeModel*. This includes Accuracy over Time, Forecast vs Actual, and Anomaly over Time.

Plots can be calculated using a common method:

- *DatetimeModel.compute_datetime_trend_plots*

Metadata for plots can be retrieved using the following methods:

- *DatetimeModel.get_accuracy_over_time_plots_metadata*
- *DatetimeModel.get_forecast_vs_actual_plots_metadata*
- *DatetimeModel.get_anomaly_over_time_plots_metadata*

Plots can be retrieved using the following methods:

- *DatetimeModel.get_accuracy_over_time_plot*
- *DatetimeModel.get_forecast_vs_actual_plot*
- *DatetimeModel.get_anomaly_over_time_plot*

Preview plots can be retrieved using the following methods:

- `DatetimeModel.get_accuracy_over_time_plot_preview`
- `DatetimeModel.get_forecast_vs_actual_plot_preview`
- `DatetimeModel.get_anomaly_over_time_plot_preview`

- Support for Batch Prediction Job Definitions has now been added through the following class: `BatchPredictionJobDefinition`. You can create, update, list and delete definitions using the following methods:

- `BatchPredictionJobDefinition.list`
- `BatchPredictionJobDefinition.create`
- `BatchPredictionJobDefinition.update`
- `BatchPredictionJobDefinition.delete`

Enhancements

- Added a new helper function to create Dataset Definition, Relationship and Secondary Dataset used by Feature Discovery Project. They are accessible via `DatasetDefinition Relationship SecondaryDataset`
- Added new helper function to projects to retrieve the recommended model. `Project.recommended_model`
- Added method to download feature discovery recipe SQLs (limited beta feature). `Project.download_feature_discovery_recipe_sqls`.
- Added `docker_context_size` and `docker_image_size` to `datarobot.ExecutionEnvironmentVersion`

Bugfixes

- Remove the deprecation warnings when using with latest versions of urllib3.
- `FeatureAssociationMatrix.get` is now using correct query param name when `featurelist_id` is specified.
- Handle scalar values in `shapBaseValue` while converting a predictions response to a data frame.
- Ensure that if a configured endpoint ends in a trailing slash, the resulting full URL does not end up with double slashes in the path.
- `Model.request_frozen_datetime_model` is now implementing correct validation of input parameter `training_start_date`.

API Changes

- Arguments `secondary_datasets` now accept `SecondaryDataset` to create secondary dataset configurations - `SecondaryDatasetConfigurations.create`
- Arguments `dataset_definitions` and `relationships` now accept `DatasetDefinition Relationship` to create and replace relationships configuration - `RelationshipsConfiguration.create` creates a new relationships configuration between datasets - `RelationshipsConfiguration.retrieve` retrieve the requested relationships configuration

- Argument `required_metadata_keys` has been added to `datarobot.ExecutionEnvironment`. This should be used to define a list of `RequiredMetadataKey`. `datarobot.CustomModelVersion` that use a base environment with `required_metadata_keys` must define values for these fields in their respective `required_metadata`
- Argument `required_metadata` has been added to `datarobot.CustomModelVersion`. This should be set with relevant values defined by the base environment's `required_metadata_keys`

2.5.11 2.24.0

New Features

- Partial history predictions can be made with time series time series multiserries models using the `allow_partial_history_time_series_predictions` attribute of the `datarobot.DatetimePartitioningSpecification`. See the *Time Series* documentation for more info.
- Multicategorical Histograms are now retrievable. They are accessible via `MulticategoricalHistogram` or `Feature.get_multicategorical_histogram`.
- Add methods to retrieve per-class lift chart data for multilabel models: `Model.get_multilabel_lift_charts` and `Model.get_all_multilabel_lift_charts`.
- Add methods to retrieve labelwise ROC curves for multilabel models: `Model.get_labelwise_roc_curves` and `Model.get_all_labelwise_roc_curves`.
- Multicategorical Pairwise Statistics are now retrievable. They are accessible via `PairwiseCorrelations`, `PairwiseJointProbabilities` and `PairwiseConditionalProbabilities` or `Feature.get_pairwise_correlations`, `Feature.get_pairwise_joint_probabilities` and `Feature.get_pairwise_conditional_probabilities`.
- **Add methods to retrieve prediction results of a deployment:**
 - `Deployment.get_prediction_results`
 - `Deployment.download_prediction_results`
- Add method to download scoring code of a deployment using `Deployment.download_scoring_code`.
- Added Automated Documentation: now you can automatically generate documentation about various entities within the platform, such as specific models or projects. Check out the *Automated Documentation overview* and also refer to the *API Reference* for more details.
- **Create a new Dataset version for a given dataset by uploading from a file, URL or in-memory datasource.**
 - `Dataset.create_version_from_file`
 - `Dataset.create_version_from_in_memory_data`
 - `Dataset.create_version_from_url`
 - `Dataset.create_version_from_data_source`

Enhancements

- Added a new status called FAILED to from `BatchPredictionJob` as this is a new status coming to Batch Predictions in an upcoming version of DataRobot.
- Added `base_environment_version_id` to `datarobot.CustomModelVersion`.

- Support for downloading feature discovery training or prediction dataset using `Project.download_feature_discovery_dataset`.
- Added `datarobot.models.FeatureAssociationMatrix`, `datarobot.models.FeatureAssociationMatrixDetails` and `datarobot.models.FeatureAssociationFeaturelists` that can be used to retrieve feature associations data as an alternative to `Project.get_associations`, `Project.get_association_matrix_details` and `Project.get_association_featurelists` methods.

Bugfixes

- Fixed response validation that could cause `DataError` when using `TrainingPredictions.list` and `TrainingPredictions.get_all_as_dataframe` methods if there are training predictions computed with `explanation_algorithm`.

API Changes

- Remove `desired_memory` param from the following classes: `datarobot.CustomInferenceModel`, `datarobot.CustomModelVersion`, `datarobot.CustomModelTest`
- Remove `desired_memory` param from the following methods: `CustomInferenceModel.create`, `CustomModelVersion.create_clean`, `CustomModelVersion.create_clean`, `CustomModelTest.create` and `CustomModelTest.create`

Deprecation Summary

- class `ComplianceDocumentation` will be deprecated in v2.24 and will be removed entirely in v2.27. Use `AutomatedDocument` instead. To start off, see the [Automated Documentation overview](#) for details.

Configuration Changes

Documentation Changes

- Remove reference to S3 for `Project.upload_dataset` since it is not supported by the server

2.5.12 2.23.0

New Features

- Calendars for time series projects can now be automatically generated by providing a country code to the method `CalendarFile.create_calendar_from_country_code`. A list of allowed country codes can be retrieved using `CalendarFile.get_allowed_country_codes` For more information, see the [calendar documentation](#).
- Added `calculate_all_series` param to `DatetimeModel.compute_series_accuracy`. This option allows users to compute series accuracy for all available series at once, while by default it is computed for first 1000 series only.
- Added ability to specify sampling method when setting target of OTV project. Option can be set in `AdvancedOptions` and changes a way training data is defined in autopilot steps.

- Add support for custom inference model k8s resources management. This new feature enables users to control k8s resources allocation for their executed model in the k8s cluster. It involves in adding the following new parameters: `network_egress_policy`, `desired_memory`, `maximum_memory`, `replicas` to the following classes: `datarobot.CustomInferenceModel`, `datarobot.CustomModelVersion`, `datarobot.CustomModelTest`
- Add support for multiclass custom inference and training models. This enables users to create classification custom models with more than two class labels. The `datarobot.CustomInferenceModel` class can now use `datarobot.TARGET_TYPE.MULTICLASS` for their `target_type` parameter. Class labels for inference models can be set/updated using either a file or as a list of labels.
- **Support for Listing all the secondary dataset configuration for a given project:**
 - `SecondaryDatasetConfigurations.list`
- Add support for unstructured custom inference models. The `datarobot.CustomInferenceModel` class can now use `datarobot.TARGET_TYPE.UNSTRUCTURED` for its `target_type` parameter. `target_name` parameter is optional for UNSTRUCTURED target type.
- All per-class lift chart data is now available for multiclass models using `Model.get_multiclass_lift_chart`.
- `AUTOPILOT_MODE.COMPREHENSIVE`, a new mode, has been added to `Project.set_target`.
- Add support for anomaly detection custom inference models. The `datarobot.CustomInferenceModel` class can now use `datarobot.TARGET_TYPE.ANOMALY` for its `target_type` parameter. `target_name` parameter is optional for ANOMALY target type.
- **Support for Updating and retrieving the secondary dataset configuration for a Feature discovery deployment:**
 - `Deployment.update_secondary_dataset_config`
 - `Deployment.get_secondary_dataset_config`
- Add support for starting and retrieving Feature Impact information for `datarobot.CustomModelVersion`
- **Search for interaction features and Supervised Feature reduction for feature discovery project can now be specified in `AdvancedOptions`.**
- Feature discovery projects can now be created using the `Project.start` method by providing `relationships_configuration_id`.
- Actions applied to input data during automated feature discovery can now be retrieved using `FeatureLineage.get` Corresponding feature lineage id is available as a new `datarobot.models.Feature` field `feature_lineage_id`.
- Lift charts and ROC curves are now calculated for backtests 2+ in time series and OTV models. The data can be retrieved for individual backtests using `Model.get_lift_chart` and `Model.get_roc_curve`.
- **The following methods now accept a new argument called `credential_data`, the credentials to authenticate with the database:**
 - `Dataset.create_from_data_source`
 - `Dataset.create_project`
 - `Project.create_from_dataset`
- Add support for DataRobot Connectors, `datarobot.Connector` provides a simple implementation to interface with connectors.

Enhancements

- Running Autopilot on Leakage Removed feature list can now be specified in *AdvancedOptions*. By default, Autopilot will always run on Informative Features - Leakage Removed feature list if it exists. If the parameter *run_leakage_removed_feature_list* is set to False, then Autopilot will run on Informative Features or available custom feature list.
- Method *Project.upload_dataset* and *Project.upload_dataset_from_data_source* support new optional parameter *secondary_datasets_config_id* for Feature discovery project.

Bugfixes

- added *disable_holdout* param in *datarobot.DatetimePartitioning*
- Using *Credential.create_gcp* produced an incompatible credential
- *SampleImage.list* now supports Regression & Multilabel projects
- Using *BatchPredictionJob.score* could in some circumstances result in a crash from trying to abort the job if it fails to start
- Using *BatchPredictionJob.score* or *BatchPredictionJob.score* would produce incomplete results in case a job was aborted while downloading. This will now raise an exception.

API Changes

- New *sampling_method* param in *Model.train_datetime*, *Project.train_datetime*, *Model.train_datetime* and *Model.train_datetime*.
- New *target_type* param in *datarobot.CustomInferenceModel*
- New arguments ***secondary_datasets***, ***name***, ***creator_full_name***, ***creator_user_id***, ***created***, ***featurelist_id***, ***credentials_ids***, ***project_version*** and ***is_default*** in *datarobot.models.SecondaryDatasetConfigurations*
- New arguments ***secondary_datasets***, ***name***, ***featurelist_id*** to *SecondaryDatasetConfigurations.create*
- Class *FeatureEngineeringGraph* has been removed. Use *datarobot.models.RelationshipsConfiguration* instead.
- Param *feature_engineering_graphs* removed from *Project.set_target*.
- Param *config* removed from *SecondaryDatasetConfigurations.create*.

Deprecation Summary

- ***supports_binary_classification*** and ***supports_regression*** are deprecated for *datarobot.CustomInferenceModel* and will be removed in v2.24
- **Argument *config* and *supports_regression*** are deprecated for *datarobot.models.SecondaryDatasetConfigurations* and will be removed in v2.24
- ***CustomInferenceImage* has been deprecated and will be removed in v2.24.** *datarobot.CustomModelVersion* with *base_environment_id* should be used in their place.
- *environment_id* and *environment_version_id* are deprecated for *CustomModelTest.create*

Documentation Changes

- *feature_lineage_id* is added as a new parameter in the response for retrieval of a *datarobot.models.Feature* created by automated feature discovery or time series feature derivation. This id is required to retrieve a *datarobot.models.FeatureLineage* instance.

2.5.13 2.22.1

New Features

- Batch Prediction jobs now support *dataset* as intake settings for *BatchPredictionJob.score*.
- Create a Dataset from DataSource:
 - *Dataset.create_from_data_source*
 - *DataSource.create_dataset*
- Added support for Custom Model Dependency Management. Please see *custom model documentation*. New features added:
 - Added new argument *base_environment_id* to methods *CustomModelVersion.create_clean* and *CustomModelVersion.create_from_previous*
 - New fields *base_environment_id* and *dependencies* to class *datarobot.CustomModelVersion*
 - New class *datarobot.CustomModelVersionDependencyBuild* to prepare custom model versions with dependencies.
 - Made argument *environment_id* of *CustomModelTest.create* optional to enable using custom model versions with dependencies
 - New field *image_type* added to class *datarobot.CustomModelTest*
 - *Deployment.create_from_custom_model_version* can be used to create a deployment from a custom model version.
- Added new parameters for starting and re-running Autopilot with customizable settings within *Project.start_autopilot*.
- Added a new method to trigger Feature Impact calculation for a Custom Inference Image: *CustomInferenceImage.calculate_feature_impact*
- Added new method to retrieve number of iterations trained for early stopping models. Currently supports only tree-based models. *Model.get_num_iterations_trained*.

Enhancements

- A description can now be added or updated for a project. *Project.set_project_description*.
- Added new parameters *read_timeout* and *max_wait* to method *Dataset.create_from_file*. Values larger than the default can be specified for both to avoid timeouts when uploading large files.
- Added new parameter *metric* to *datarobot.models.TargetDrift*, *datarobot.models.FeatureDrift*, *Deployment.get_target_drift* and *Deployment.get_feature_drift*.
- Added new parameter *timeout* to *BatchPredictionJob.download* to indicate how many seconds to wait for the download to start (in case the job doesn't start processing immediately). Set to *-1* to

disable. This parameter can also be sent as `download_timeout` to `BatchPredictionJob.score` and `BatchPredictionJob.score`. If the timeout occurs, the pending job will be aborted.

- Added new parameter `read_timeout` to `BatchPredictionJob.download` to indicate how many seconds to wait between each downloaded chunk. This parameter can also be sent as `download_read_timeout` to `BatchPredictionJob.score` and `BatchPredictionJob.score`.
- Added parameter `catalog` to `BatchPredictionJob` to both intake and output adapters for type `jdbc`.
- Consider blenders in recommendation can now be specified in `AdvancedOptions`. Blenders will be included when autopilot chooses a model to prepare and recommend for deployment.
- Added optional parameter `max_wait` to `Deployment.replace_model` to indicate the maximum time to wait for model replacement job to complete before erroring.

Bugfixes

- Handle null values in `predictionExplanationMetadata["shapRemainingTotal"]` while converting a predictions response to a data frame.
- Handle null values in `customModel["latestVersion"]`
- Removed an extra column `status` from `BatchPredictionJob` as it caused issues with never version of Trafaret validation.
- Make `predicted_vs_actual` optional in Feature Effects data because a feature may have insufficient qualified samples.
- Make `jdbc_url` optional in Data Store data because some data stores will not have it.
- The method `Project.get_datetime_models` now correctly returns all `DatetimeModel` objects for the project, instead of just the first 100.
- Fixed a documentation error related to `snake_case` vs `camelCase` in the JDBC settings payload.
- Make trafaret validator for datasets use a syntax that works properly with a wider range of trafaret versions.
- Handle extra keys in `CustomModelTests` and `CustomModelVersions`
- `ImageEmbedding` and `ImageActivationMap` now supports regression projects.

API Changes

- The default value for the `mode` param in `Project.set_target` has been changed from `AUTOPILOT_MODE.FULL_AUTO` to `AUTOPILOT_MODE.QUICK`

Deprecation Summary

Configuration Changes

Documentation Changes

- Added links to classes with duration parameters such as `validation_duration` and `holdout_duration` to provide duration string examples to users.
- The `models documentation` has been revised to include section on how to train a new model and how to run cross-validation or backtesting for a model.

2.5.14 2.21.0

New Features

- Added new arguments `explanation_algorithm` and `max_explanations` to method `Model.request_training_predictions`. New fields `explanation_algorithm`, `max_explanations` and `shap_warnings` have been added to class `TrainingPredictions`. New fields `prediction_explanations` and `shap_metadata` have been added to class `TrainingPredictionsIterator` that is returned by method `TrainingPredictions.iterate_rows`.
- Added new arguments `explanation_algorithm` and `max_explanations` to method `Model.request_predictions`. New fields `explanation_algorithm`, `max_explanations` and `shap_warnings` have been added to class `Predictions`. Method `Predictions.get_all_as_dataframe` has new argument `serializer` that specifies the retrieval and results validation method (`json` or `csv`) for the predictions.
- Added possibility to compute `ShapImpact.create` and request `ShapImpact.get` SHAP impact scores for features in a model.
- Added support for accessing Visual AI images and insights. See the DataRobot Python Package documentation, Visual AI Projects, section for details.
- User can specify custom row count when requesting Feature Effects. Extended methods are `Model.request_feature_effect` and `Model.get_or_request_feature_effect`.
- Users can request SHAP based predictions explanations for a models that support SHAP scores using `ShapMatrix.create`.
- Added two new methods to `Dataset` to lazily retrieve paginated responses.
 - `Dataset.iterate` returns an iterator of the datasets that a user can view.
 - `Dataset.iterate_all_features` returns an iterator of the features of a dataset.
- It's possible to create an Interaction feature by combining two categorical features together using `Project.create_interaction_feature`. Operation result represented by `models.InteractionFeature`. Specific information about an interaction feature may be retrieved by its name using `models.InteractionFeature.get`
- Added the `DatasetFeaturelist` class to support featurelists on datasets in the AI Catalog. `DatasetFeaturelists` can be updated or deleted. Two new methods were also added to `Dataset` to interact with `DatasetFeaturelists`. These are `Dataset.get_featurelists` and `Dataset.create_featurelist` which list existing featurelists and create new featurelists on a dataset, respectively.
- Added `model_splits` to `DatetimePartitioningSpecification` and to `DatetimePartitioning`. This will allow users to control the jobs per model used when building models. A higher number of `model_splits` will result in less downsampling, allowing the use of more post-processed data.
- Added support for *unsupervised projects*.
- Added support for external test set. Please see *testset documentation*
- A new workflow is available for assessing models on external test sets in time series unsupervised projects. More information can be found in the *documentation*.
 - `Project.upload_dataset` and `Model.request_predictions` now accept `actual_value_column` - name of the actual value column, can be passed only with date range.
 - `PredictionDataset` objects now contain the following new fields:

- * `actual_value_column`: Actual value column which was selected for this dataset.
- * `detected_actual_value_column`: A list of detected actual value column info.
- New warning is added to `data_quality_warnings` of `datarobot.models.PredictionDataset`: `single_class_actual_value_column`.
- Scores and insights on external test sets can be retrieved using `ExternalScores`, `ExternalLiftChart`, `ExternalRocCurve`.
- Users can create payoff matrices for generating profit curves for binary classification projects using `PayoffMatrix.create`.
- Deployment Improvements:
 - `datarobot.models.TargetDrift` can be used to retrieve target drift information.
 - `datarobot.models.FeatureDrift` can be used to retrieve feature drift information.
 - `Deployment.submit_actuals` will submit actuals in batches if the total number of actuals exceeds the limit of one single request.
 - `Deployment.create_from_custom_model_image` can be used to create a deployment from a custom model image.
 - Deployments now support predictions data collection that enables prediction requests and results to be saved in Predictions Data Storage. See `Deployment.get_predictions_data_collection_settings` and `Deployment.update_predictions_data_collection_settings` for usage.
- New arguments `send_notification` and `include_feature_discovery_entities` are added to `Project.share`.
- Now it is possible to specify the number of training rows to use in feature impact computation on supported project types (that is everything except unsupervised, multi-class, time-series). This does not affect SHAP based feature impact. Extended methods:
 - `Model.request_feature_impact`
 - `Model.get_or_request_feature_impact`
- A new class `FeatureImpactJob` is added to retrieve Feature Impact records with metadata. The regular `Job` still works as before.
- Added support for custom models. Please see [custom model documentation](#). Classes added:
 - `datarobot.ExecutionEnvironment` and `datarobot.ExecutionEnvironmentVersion` to create and manage custom model executions environments
 - `datarobot.CustomInferenceModel` and `datarobot.CustomModelVersion` to create and manage custom inference models
 - `datarobot.CustomModelTest` to perform testing of custom models
- Batch Prediction jobs now support forecast and historical Time Series predictions using the new argument `timeseries_settings` for `BatchPredictionJob.score`.
- Batch Prediction jobs now support scoring to Azure and Google Cloud Storage with methods `BatchPredictionJob.score_azure` and `BatchPredictionJob.score_gcp`.
- Now it's possible to create Relationships Configurations to introduce secondary datasets to projects. A configuration s
 - `RelationshipsConfiguration.create` creates a new relationships configuration between datasets

- `RelationshipsConfiguration.retrieve` retrieve the requested relationships configuration
- `RelationshipsConfiguration.replace` replace the relationships configuration details with new one
- `RelationshipsConfiguration.delete` delete the relationships configuration

Enhancements

- Made creating projects from a dataset easier through the new `Dataset.create_project`.
- These methods now provide additional metadata fields in Feature Impact results if called with `with_metadata=True`. Fields added: `rowCount`, `shapBased`, `ranRedundancyDetection`, `count`.
 - `Model.get_feature_impact`
 - `Model.request_feature_impact`
 - `Model.get_or_request_feature_impact`
- Secondary dataset configuration retrieve and deletion is easier now through new `SecondaryDatasetConfigurations.delete` soft deletes a Secondary dataset configuration. `SecondaryDatasetConfigurations.get` retrieve a Secondary dataset configuration.
- Retrieve relationships configuration which is applied on the given feature discovery project using `Project.get_relationships_configuration`.

Bugfixes

- An issue with input validation of the Batch Prediction module
- `parent_model_id` was not visible for all frozen models
- Batch Prediction jobs that used other output types than `local_file` failed when using `.wait_for_completion()`
- A race condition in the Batch Prediction file scoring logic

API Changes

- Three new fields were added to the `Dataset` object. This reflects the updated fields in the public API routes at `api/v2/datasets/`. The added fields are:
 - `processing_state`: Current ingestion process state of the dataset
 - `row_count`: The number of rows in the dataset.
 - `size`: The size of the dataset as a CSV in bytes.

Deprecation Summary

- `datarobot.enums.VARIABLE_TYPE_TRANSFORM.CATEGORICAL` for is deprecated for the following and will be removed:
 - meth:`Project.batch_features_type_transform`
 - meth:`Project.create_type_transform_feature`

2.5.15 2.20.0

New Features

- There is a new *Dataset* object that implements some of the public API routes at *api/v2/datasets/*. This also adds two new feature classes and a details class.

- *DatasetFeature*
- *DatasetFeatureHistogram*
- *DatasetDetails*

Functionality:

- Create a Dataset by uploading from a file, URL or in-memory datasource.
 - * *Dataset.create_from_file*
 - * *Dataset.create_from_in_memory_data*
 - * *Dataset.create_from_url*
- Get Datasets or elements of Dataset with:
 - * *Dataset.list* lists available Datasets
 - * *Dataset.get* gets a specified Dataset
 - * *Dataset.update* updates the Dataset with the latest server information.
 - * *Dataset.get_details* gets the DatasetDetails of the Dataset.
 - * *Dataset.get_all_features* gets a list of the Dataset's Features.
 - * *Dataset.get_file* downloads the Dataset as a csv file.
 - * *Dataset.get_projects* gets a list of Projects that use the Dataset.
- Modify, delete or un-delete a Dataset:
 - * *Dataset.modify* Changes the name and categories of the Dataset
 - * *Dataset.delete* soft deletes a Dataset.
 - * *Dataset.un_delete* un-deletes the Dataset. You cannot retrieve the IDs of deleted Datasets, so if you want to un-delete a Dataset, you need to store its ID before deletion.
- You can also create a Project using a *Dataset* with:
 - * *Project.create_from_dataset*
- It is possible to create an alternative configuration for the secondary dataset which can be used during the prediction
 - *SecondaryDatasetConfigurations.create* allow to create secondary dataset configuration
- You can now filter the deployments returned by the *Deployment.list* command. You can do this by passing an instance of the *DeploymentListFilters* class to the *filters* keyword argument. The currently supported filters are:
 - *role*
 - *service_health*
 - *model_health*
 - *accuracy_health*

- `execution_environment_type`
- `materiality`
- A new workflow is available for making predictions in time series projects. To that end, `PredictionDataset` objects now contain the following new fields:
 - `forecast_point_range`: The start and end date of the range of dates available for use as the forecast point, detected based on the uploaded prediction dataset
 - `data_start_date`: A datestring representing the minimum primary date of the prediction dataset
 - `data_end_date`: A datestring representing the maximum primary date of the prediction dataset
 - `max_forecast_date`: A datestring representing the maximum forecast date of this prediction dataset

Additionally, users no longer need to specify a `forecast_point` or `predictions_start_date` and `predictions_end_date` when uploading datasets for predictions in time series projects. More information can be found in the [time series predictions](#) documentation.

- Per-class lift chart data is now available for multiclass models using `Model.get_multiclass_lift_chart`.
- Unsupervised projects can now be created using the `Project.start` and `Project.set_target` methods by providing `unsupervised_mode=True`, provided that the user has access to unsupervised machine learning functionality. Contact support for more information.
- A new boolean attribute `unsupervised_mode` was added to `datarobot.DatetimePartitioningSpecification`. When it is set to `True`, datetime partitioning for unsupervised time series projects will be constructed for nowcasting: `forecast_window_start=forecast_window_end=0`.
- Users can now configure the start and end of the training partition as well as the end of the validation partition for backtests in a datetime-partitioned project. More information and example usage can be found in the [backtesting documentation](#).

Enhancements

- Updated the user agent header to show which python version.
- `Model.get_frozen_child_models` can be used to retrieve models that are frozen from a given model
- Added `datarobot.enums.TS_BLENDER_METHOD` to make it clearer which blender methods are allowed for use in time series projects.

Bugfixes

- An issue where uploaded CSVs would lose quotes during serialization causing issues when columns containing line terminators were loaded in a dataframe, has been fixed
- `Project.get_association_featurelists` is now using the correct endpoint name, but the old one will continue to work
- Python API `PredictionServer` supports now on-premise format of API response.

API Changes

Deprecation Summary

Configuration Changes

Documentation Changes

2.5.16 2.19.0

New Features

- Projects can be cloned using `Project.clone_project`
- Calendars used in time series projects now support having series-specific events, for instance if a holiday only affects some stores. This can be controlled by using new argument of the `CalendarFile.create` method. If multiseries id columns are not provided, calendar is considered to be single series and all events are applied to all series.
- We have expanded prediction intervals availability to the following use-cases:
 - Time series model deployments now support prediction intervals. See `Deployment.get_prediction_intervals_settings` and `Deployment.update_prediction_intervals_settings` for usage.
 - Prediction intervals are now supported for model exports for time series. To that end, a new optional parameter `prediction_intervals_size` has been added to `Model.request_transferable_export`.

More details on prediction intervals can be found in the [prediction intervals documentation](#).

- Allowed pairwise interaction groups can now be specified in `AdvancedOptions`. They will be used in GAM models during training.
- New deployments features:
 - Update the label and description of a deployment using `Deployment.update`.
 - `Association ID setting` can be retrieved and updated.
 - Regression deployments now support `prediction warnings`.
- For multiclass models now it's possible to get feature impact for each individual target class using `Model.get_multiclass_feature_impact`
- Added support for new `Batch Prediction API`.
- It is now possible to create and retrieve basic, oauth and s3 credentials with `Credential`.
- It's now possible to get feature association statuses for featurelists using `Project.get_association_featurelists`
- You can also pass a specific `featurelist_id` into `Project.get_associations`

Enhancements

- Added documentation to `Project.get_metrics` to detail the new ascending field that indicates how a metric should be sorted.
- Retraining of a model is processed asynchronously and returns a `ModelJob` immediately.
- Blender models can be retrained on a different set of data or a different feature list.
- Word cloud ngrams now has `variable` field representing the source of the ngram.

- Method `WordCloud.ngrams_per_class` can be used to split ngrams for better usability in multiclass projects.
- Method `Project.set_target` support new optional parameters `featureEngineeringGraphs` and `credentials`.
- Method `Project.upload_dataset` and `Project.upload_dataset_from_data_source` support new optional parameter `credentials`.
- Series accuracy retrieval methods (`DatetimeModel.get_series_accuracy_as_dataframe` and `DatetimeModel.download_series_accuracy_as_csv`) for multiseries time series projects now support additional parameters for specifying what data to retrieve, including:
 - `metric`: Which metric to retrieve scores for
 - `multiseries_value`: Only returns series with a matching multiseries ID
 - `order_by`: An attribute by which to sort the results

Bugfixes

- An issue when using `Feature.get` and `ModelingFeature.get` to retrieve summarized categorical feature has been fixed.

API Changes

- The `datarobot` package is now no longer a namespace package.
- `datarobot.enums.BLENDER_METHOD.FORECAST_DISTANCE` is removed (deprecated in 2.18.0).

Documentation Changes

- Updated *Residuals charts* documentation to reflect that the data rows include row numbers from the source dataset for projects created in DataRobot 5.3 and newer.

2.5.17 2.18.0

New Features

- *Residuals charts* can now be retrieved for non-time-aware regression models.
- *Deployment monitoring* can now be used to retrieve service stats, service health, accuracy info, permissions, and feature lists for deployments.
- *Time series* projects now support the Average by Forecast Distance blender, configured with more than one Forecast Distance. The blender blends the selected models, selecting the best three models based on the backtesting score for each Forecast Distance and averaging their predictions. The new blender method `FORECAST_DISTANCE_AVG` has been added to `datarobot.enums.BLENDER_METHOD`.
- `Deployment.submit_actuais` can now be used to submit data about actual results from a deployed model, which can be used to calculate accuracy metrics.

Enhancements

- Monotonic constraints are now supported for OTV projects. To that end, the parameters `monotonic_increasing_featurelist_id` and `monotonic_decreasing_featurelist_id` can be specified in calls to `Model.train_datetime` or `Project.train_datetime`.
- When *retrieving information about features*, information about summarized categorical variables is now available in a new `keySummary`.
- For *Word Clouds* in multiclass projects, values of the target class for corresponding word or ngram can now be passed using the new `class` parameter.
- Listing deployments using `Deployment.list` now support sorting and searching the results using the new `order_by` and `search` parameters.
- You can now get the model associated with a model job by getting the `model` variable on the *model job object*.
- The *Blueprint* class can now retrieve the `recommended_featurelist_id`, which indicates which feature list is recommended for this blueprint. If the field is not present, then there is no recommended feature list for this blueprint.
- The *Model* class now can be used to retrieve the `model_number`.
- The `Model.get_supported_capabilities` method now has an extra field `supportsCodeGeneration` to explain whether the model supports code generation.
- Calls to `Project.start` and `Project.upload_dataset` now support uploading data via S3 URI and `pathlib.Path` objects.
- Errors upon connecting to DataRobot are now clearer when an incorrect API Token is used.
- The `datarobot` package is now a *namespace package*.

Deprecation Summary

- `datarobot.enums.BLENDER_METHOD.FORECAST_DISTANCE` is deprecated and will be removed in 2.19. Use `FORECAST_DISTANCE_ENET` instead.

Documentation Changes

- Various typo and wording issues have been addressed.
- A new notebook showing regression-specific features is now been added to the *examples*.
- Documentation for *Access lists* has been added.

2.5.18 2.17.0

New Features

- *Deployments* can now be managed via the API by using the new *Deployment* class.
- Users can now list available prediction servers using `PredictionServer.list`.
- When *specifying datetime partitioning* settings, *time series* projects can now mark individual features as excluded from feature derivation using the `FeatureSettings.do_not_derive` attribute. Any features not specified will be assigned according to the `DatetimePartitioningSpecification.default_to_do_not_derive` value.

- Users can now submit multiple feature type transformations in a single batch request using `Project.batch_features_type_transform`.
- *Advanced Tuning* for non-Eureqa models (beta feature) is now enabled by default for all users. As of v2.17, all models are now supported other than blenders, open source, prime, scaleout, baseline and user-created.
- Information on feature clustering and the association strength between pairs of numeric or categorical features is now available. `Project.get_associations` can be used to retrieve pairwise feature association statistics and `Project.get_association_matrix_details` can be used to get a sample of the actual values used to measure association strength.

Enhancements

- `number_of_do_not_derive_features` has been added to the `datarobot.DatetimePartitioning` class to specify the number of features that are marked as excluded from derivation.
- Users with PyYAML>=5.1 will no longer receive a warning when using the `datarobot` package
- It is now possible to use files with unicode names for creating projects and prediction jobs.
- Users can now embed DataRobot-generated content in a `ComplianceDocTemplate` using keyword tags. [See here](#) for more details.
- The field `calendar_name` has been added to `datarobot.DatetimePartitioning` to display the name of the calendar used for a project.
- *Prediction intervals* are now supported for start-end retrained models in a time series project.
- Previously, all backtests had to be run before *prediction intervals* for a time series project could be requested with predictions. Now, backtests will be computed automatically if needed when prediction intervals are requested.

Bugfixes

- An issue affecting time series project creation for irregularly spaced dates has been fixed.
- `ComplianceDocTemplate` now supports empty text blocks in user sections.
- An issue when using `Predictions.get` to retrieve predictions metadata has been fixed.

Documentation Changes

- An overview on working with class `ComplianceDocumentation` and `ComplianceDocTemplate` has been created. [See here](#) for more details.

2.5.19 2.16.0

New Features

- Three new methods for Series Accuracy have been added to the `DatetimeModel` class.
 - Start a request to calculate Series Accuracy with `DatetimeModel.compute_series_accuracy`
 - Once computed, Series Accuracy can be retrieved as a pandas.DataFrame using `DatetimeModel.get_series_accuracy_as_dataframe`
 - Or saved as a CSV using `DatetimeModel.download_series_accuracy_as_csv`

- Users can now access *prediction intervals* data for each prediction with a *DatetimeModel*. For each model, prediction intervals estimate the range of values DataRobot expects actual values of the target to fall within. They are similar to a confidence interval of a prediction, but are based on the residual errors measured during the backtesting for the selected model.

Enhancements

- Information on the effective feature derivation window is now available for *time series projects* to specify the full span of historical data required at prediction time. It may be longer than the feature derivation window of the project depending on the differencing settings used.

Additionally, more of the project partitioning settings are also available on the *DatetimeModel* class. The new attributes are:

- `effective_feature_derivation_window_start`
- `effective_feature_derivation_window_end`
- `forecast_window_start`
- `forecast_window_end`
- `windows_basis_unit`

- Prediction metadata is now included in the return of *Predictions.get*

Documentation Changes

- Various typo and wording issues have been addressed.
- The example data that was meant to accompany the Time Series examples has been added to the zip file of the download in the *examples*.

2.5.20 2.15.1

Enhancements

- *CalendarFile.get_access_list* has been added to the *CalendarFile* class to return a list of users with access to a calendar file.
- A `role` attribute has been added to the *CalendarFile* class to indicate the access level a current user has to a calendar file. For more information on the specific access levels, see the *sharing* documentation.

Bugfixes

- Previously, attempting to retrieve the `calendar_id` of a project without a set target would result in an error. This has been fixed to return `None` instead.

2.5.21 2.15.0

New Features

- Previously available for only Eureqa models, Advanced Tuning methods and objects, including *Model.start_advanced_tuning_session*, *Model.get_advanced_tuning_parameters*, *Model.advanced_tune*, and *AdvancedTuningSession*, now support all models other than blender, open

source, and user-created models. Use of Advanced Tuning via API for non-Eureqa models is in beta and not available by default, but can be enabled.

- Calendar Files for time series projects can now be created and managed through the `CalendarFile` class.

Enhancements

- The `dataframe` returned from `datarobot.PredictionExplanations.get_all_as_dataframe()` will now have each class label `class_X` be the same from row to row.
- The client is now more robust to networking issues by default. It will retry on more errors and respects `Retry-After` headers in HTTP 413, 429, and 503 responses.
- Added Forecast Distance blender for Time-Series projects configured with more than one Forecast Distance. It blends the selected models creating separate linear models for each Forecast Distance.
- `Project` can now be *shared* with other users.
- `Project.upload_dataset` and `Project.upload_dataset_from_data_source` will return a `PredictionDataset` with `data_quality_warnings` if potential problems exist around the uploaded dataset.
- `relax_known_in_advance_features_check` has been added to `Project.upload_dataset` and `Project.upload_dataset_from_data_source` to allow missing values from the known in advance features in the forecast window at prediction time.
- `cross_series_group_by_columns` has been added to `datarobot.DatetimePartitioning` to allow users the ability to indicate how to further split series into related groups.
- Information retrieval for `ROC Curve` has been extended to include `fraction_predicted_as_positive`, `fraction_predicted_as_negative`, `lift_positive` and `lift_negative`

Bugfixes

- Fixes an issue where the client would not be usable if it could not be sure it was compatible with the configured server

API Changes

- Methods for creating `datarobot.models.Project`: `create_from_mysql`, `create_from_oracle`, and `create_from_postgresql`, deprecated in 2.11, have now been removed. Use `datarobot.models.Project.create_from_data_source()` instead.
- `datarobot.FeatureSettings` attribute `apriori`, deprecated in 2.11, has been removed. Use `datarobot.FeatureSettings.known_in_advance` instead.
- `datarobot.DatetimePartitioning` attribute `default_to_a_priori`, deprecated in 2.11, has been removed. Use `datarobot.DatetimePartitioning.known_in_advance` instead.
- `datarobot.DatetimePartitioningSpecification` attribute `default_to_a_priori`, deprecated in 2.11, has been removed. Use `datarobot.DatetimePartitioningSpecification.known_in_advance` instead.

Deprecation Summary

Configuration Changes

- Now requires dependency on package `requests` to be at least version 2.21.
- Now requires dependency on package `urllib3` to be at least version 1.24.

Documentation Changes

- Advanced model insights notebook extended to contain information on visualization of cumulative gains and lift charts.

2.5.22 2.14.2

Bugfixes

- Fixed an issue where searches of the HTML documentation would sometimes hang indefinitely

Documentation Changes

- Python3 is now the primary interpreter used to build the docs (this does not affect the ability to use the package with Python2)

2.5.23 2.14.1

Documentation Changes

- Documentation for the Model Deployment interface has been removed after the corresponding interface was removed in 2.13.0.

2.5.24 2.14.0

New Features

- The new method `Model.get_supported_capabilities` retrieves a summary of the capabilities supported by a particular model, such as whether it is eligible for Prime and whether it has word cloud data available.
- New class for working with model compliance documentation feature of DataRobot: `class ComplianceDocumentation`
- New class for working with compliance documentation templates: `ComplianceDocTemplate`
- New class `FeatureHistogram` has been added to retrieve feature histograms for a requested maximum bin count
- Time series projects now support binary classification targets.
- Cross series features can now be created within time series multiserries projects using the `use_cross_series_features` and `aggregation_type` attributes of the `datarobot.DatetimePartitioningSpecification`. See the *Time Series* documentation for more info.

Enhancements

- Client instantiation now checks the endpoint configuration and provides more informative error messages. It also automatically corrects HTTP to HTTPS if the server responds with a redirect to HTTPS.
- `Project.upload_dataset` and `Project.create` now accept an optional parameter of `dataset_filename` to specify a file name for the dataset. This is ignored for url and file path sources.
- New optional parameter `fallback_to_parent_insights` has been added to `Model.get_lift_chart`, `Model.get_all_lift_charts`, `Model.get_confusion_chart`, `Model.get_all_confusion_charts`, `Model.get_roc_curve`, and `Model.get_all_roc_curves`. When `True`, a frozen model with missing insights will attempt to retrieve the missing insight data from its parent model.
- New `number_of_known_in_advance_features` attribute has been added to the `datarobot.DatetimePartitioning` class. The attribute specifies number of features that are marked as known in advance.
- `Project.set_worker_count` can now update the worker count on a project to the maximum number available to the user.
- `Recommended Models API` can now be used to retrieve model recommendations for datetime partitioned projects
- Timeseries projects can now accept feature derivation and forecast windows intervals in terms of number of the rows rather than a fixed time unit. `DatetimePartitioningSpecification` and `Project.set_target` support new optional parameter `windowsBasisUnit`, either `ROW` or detected time unit.
- Timeseries projects can now accept feature derivation intervals, forecast windows, forecast points and prediction start/end dates in milliseconds.
- `DataSources` and `DataStores` can now be *shared* with other users.
- Training predictions for datetime partitioned projects now support the new data subset `dr.enums.DATA_SUBSET.ALL_BACKTESTS` for requesting the predictions for all backtest validation folds.

API Changes

- The model recommendation type `Recommended` (deprecated in version 2.13.0) has been removed.

Documentation Changes

- **Example notebooks have been updated:**
 - Notebooks now work in Python 2 and Python 3
 - A notebook illustrating time series capability has been added
 - The financial data example has been replaced with an updated introductory example.
- To supplement the embedded Python notebooks in both the PDF and HTML docs bundles, the notebook files and supporting data can now be downloaded from the HTML docs bundle.
- Fixed a minor typo in the code sample for `get_or_request_feature_impact`

2.5.25 2.13.0

New Features

- The new method `Model.get_or_request_feature_impact` functionality will attempt to request feature impact and return the newly created feature impact object or the existing object so two calls are no longer required.
- New methods and objects, including `Model.start_advanced_tuning_session`, `Model.get_advanced_tuning_parameters`, `Model.advanced_tune`, and `AdvancedTuningSession`, were added to support the setting of Advanced Tuning parameters. This is currently supported for Eureka models only.
- New `is_starred` attribute has been added to the `Model` class. The attribute specifies whether a model has been marked as starred by user or not.
- Model can be marked as starred or being unstarred with `Model.star_model` and `Model.unstar_model`.
- When listing models with `Project.get_models`, the model list can now be filtered by the `is_starred` value.
- A custom prediction threshold may now be configured for each model via `Model.set_prediction_threshold`. When making predictions in binary classification projects, this value will be used when deciding between the positive and negative classes.
- `Project.check_blendable` can be used to confirm if a particular group of models are eligible for blending as some are not, e.g. scaleout models and datetime models with different training lengths.
- Individual cross validation scores can be retrieved for new models using `Model.get_cross_validation_scores`.

Enhancements

- Python 3.7 is now supported.
- Feature impact now returns not only the impact score for the features but also whether they were detected to be redundant with other high-impact features.
- A new `is_blocked` attribute has been added to the `Job` class, specifying whether a job is blocked from execution because one or more dependencies are not yet met.
- The `Featurelist` object now has new attributes reporting its creation time, whether it was created by a user or by DataRobot, and the number of models using the featurelist, as well as a new description field.
- Featurelists can now be renamed and have their descriptions updated with `Featurelist.update` and `ModelingFeaturelist.update`.
- Featurelists can now be deleted with `Featurelist.delete` and `ModelingFeaturelist.delete`.
- `ModelRecommendation.get` now accepts an optional parameter of type `datarobot.enums.RECOMMENDED_MODEL_TYPE` which can be used to get a specific kind of recommendation.
- Previously computed predictions can now be listed and retrieved with the `Predictions` class, without requiring a reference to the original `PredictJob`.

Bugfixes

- The Model Deployment interface which was previously visible in the client has been removed to allow the interface to mature, although the raw API is available as a “beta” API without full backwards compatibility support.

API Changes

- Added support for retrieving the Pareto Front of a Eureka model. See *ParetoFront*.
- A new recommendation type `RecommendedForDeployment` has been added to *ModelRecommendation* which is now returns as the default recommended model when available. See *Model Recommendation*.

Deprecation Summary

- The feature previously referred to as `ReasonCodes` has been renamed to `Prediction Explanation`, to provide increased clarity and accessibility. The old `ReasonCodes` interface has been deprecated and replaced with *PredictionExplanations*.
- The recommendation type `Recommended` is deprecated and will no longer be returned in v2.14 of the API.

Documentation Changes

- Added a new documentation section *Model Recommendation*.
- Time series projects support multiserries as well as single series data. They are now documented in the *Time Series Projects* documentation.

2.5.26 2.12.0

New Features

- Some models now have Missing Value reports allowing users with access to uncensored blueprints to retrieve a detailed breakdown of how numeric imputation and categorical converter tasks handled missing values. See the *documentation* for more information on the report.

2.5.27 2.11.0

New Features

- The new `ModelRecommendation` class can be used to retrieve the recommended models for a project.
- A new helper method `cross_validate` was added to class `Model`. This method can be used to request `Model`'s Cross Validation score.
- Training a model with monotonic constraints is now supported. Training with monotonic constraints allows users to force models to learn monotonic relationships with respect to some features and the target. This helps users create accurate models that comply with regulations (e.g. insurance, banking). Currently, only certain blueprints (e.g. `xgboost`) support this feature, and it is only supported for regression and binary classification projects.
- DataRobot now supports `Database Connectivity`, allowing databases to be used as the source of data for projects and prediction datasets. The feature works on top of the JDBC standard, so a variety of databases conforming to that standard are available; a list of databases with tested support for DataRobot is available in the user guide in the web application. See *Database Connectivity* for details.

- Added a new feature to retrieve feature logs for time series projects. Check `datarobot.DatetimePartitioning.feature_log_list()` and `datarobot.DatetimePartitioning.feature_log_retrieve()` for details.

API Changes

- New attributes supporting monotonic constraints have been added to the `AdvancedOptions`, `Project`, `Model`, and `Blueprint` classes. See *monotonic constraints* for more information on how to configure monotonic constraints.
- New parameters `predictions_start_date` and `predictions_end_date` added to `Project.upload_dataset` to support bulk predictions upload for time series projects.

Deprecation Summary

- Methods for creating `datarobot.models.Project`: `create_from_mysql`, `create_from_oracle`, and `create_from_postgresql`, have been deprecated and will be removed in 2.14. Use `datarobot.models.Project.create_from_data_source()` instead.
- `datarobot.FeatureSettings` attribute `apriori`, has been deprecated and will be removed in 2.14. Use `datarobot.FeatureSettings.known_in_advance` instead.
- `datarobot.DatetimePartitioning` attribute `default_to_a_priori`, has been deprecated and will be removed in 2.14. `datarobot.DatetimePartitioning.known_in_advance` instead.
- `datarobot.DatetimePartitioningSpecification` attribute `default_to_a_priori`, has been deprecated and will be removed in 2.14. Use `datarobot.DatetimePartitioningSpecification.known_in_advance` instead.

Configuration Changes

- Retry settings compatible with those offered by urllib3's `Retry` interface can now be configured. By default, we will now retry connection errors that prevented requests from arriving at the server.

Documentation Changes

- "Advanced Model Insights" example has been updated to properly handle bin weights when rebinning.

2.5.28 2.9.0

New Features

- New `ModelDeployment` class can be used to track status and health of models deployed for predictions.

Enhancements

- DataRobot API now supports creating 3 new blender types - Random Forest, TensorFlow, LightGBM.
- Multiclass projects now support blenders creation for 3 new blender types as well as Average and ENET blenders.

- Models can be trained by requesting a particular row count using the new `training_row_count` argument with `Project.train`, `Model.train` and `Model.request_frozen_model` in non-datetime partitioned projects, as an alternative to the previous option of specifying a desired percentage of the project dataset. Specifying model size by row count is recommended when the float precision of `sample_pct` could be problematic, e.g. when training on a small percentage of the dataset or when training up to partition boundaries.
- New attributes `max_train_rows`, `scaleout_max_train_pct`, and `scaleout_max_train_rows` have been added to `Project`. `max_train_rows` specified the equivalent value to the existing `max_train_pct` as a row count. The scaleout fields can be used to see how far scaleout models can be trained on projects, which for projects taking advantage of scalable ingest may exceed the limits on the data available to non-scaleout blueprints.
- Individual features can now be marked as a priori or not a priori using the new `feature_settings` attribute when setting the target or specifying datetime partitioning settings on time series projects. Any features not specified in the `feature_settings` parameter will be assigned according to the `default_to_a_priori` value.
- Three new options have been made available in the `datarobot.DatetimePartitioningSpecification` class to fine-tune how time-series projects derive modeling features. `treat_as_exponential` can control whether data is analyzed as an exponential trend and transformations like log-transform are applied. `differencing_method` can control which differencing method to use for stationary data. `periodicities` can be used to specify periodicities occurring within the data. All are optional and defaults will be chosen automatically if they are unspecified.

API Changes

- Now `training_row_count` is available on non-datetime models as well as `rowCount` based datetime models. It reports the number of rows used to train the model (equivalent to `sample_pct`).
- Features retrieved from `Feature.get` now include `target_leakage`.

2.5.29 2.8.1

Bugfixes

- The documented default `connect_timeout` will now be correctly set for all configuration mechanisms, so that requests that fail to reach the DataRobot server in a reasonable amount of time will now error instead of hanging indefinitely. If you observe that you have started seeing `ConnectTimeout` errors, please configure your `connect_timeout` to a larger value.
- Version of `trafaret` library this package depends on is now pinned to `trafaret>=0.7, <1.1` since versions outside that range are known to be incompatible.

2.5.30 2.8.0

New Features

- The DataRobot API supports the creation, training, and predicting of multiclass classification projects. DataRobot, by default, handles a dataset with a numeric target column as regression. If your data has a numeric cardinality of fewer than 11 classes, you can override this behavior to instead create a multiclass classification project from the data. To do so, use the `set_target` function, setting `target_type="Multiclass"`. If DataRobot recognizes your data as categorical, and it has fewer than 11 classes, using multiclass will create a project that classifies which label the data belongs to.

- The DataRobot API now includes Rating Tables. A rating table is an exportable csv representation of a model. Users can influence predictions by modifying them and creating a new model with the modified table. See the [documentation](#) for more information on how to use rating tables.
- `scaleout_modeling_mode` has been added to the `AdvancedOptions` class used when setting a project target. It can be used to control whether scaleout models appear in the autopilot and/or available blueprints. Scaleout models are only supported in the Hadoop environment with the corresponding user permission set.
- A new premium add-on product, Time Series, is now available. New projects can be created as time series projects which automatically derive features from past data and forecast the future. See the [time series documentation](#) for more information.
- The `Feature` object now returns the EDA summary statistics (i.e., mean, median, minimum, maximum, and standard deviation) for features where this is available (e.g., numeric, date, time, currency, and length features). These summary statistics will be formatted in the same format as the data it summarizes.
- The DataRobot API now supports Training Predictions workflow. Training predictions are made by a model for a subset of data from original dataset. User can start a job which will make those predictions and retrieve them. See the [documentation](#) for more information on how to use training predictions.
- DataRobot now supports retrieving a [model blueprint chart](#) and a [model blueprint docs](#).
- With the introduction of Multiclass Classification projects, DataRobot needed a better way to explain the performance of a multiclass model so we created a new Confusion Chart. The API now supports retrieving and interacting with confusion charts.

Enhancements

- `DatetimePartitioningSpecification` now includes the optional `disable_holdout` flag that can be used to disable the holdout fold when creating a project with datetime partitioning.
- When retrieving reason codes on a project using an exposure column, predictions that are adjusted for exposure can be retrieved.
- File URIs can now be used as sourcedata when creating a project or uploading a prediction dataset. The file URI must refer to an allowed location on the server, which is configured as described in the user guide documentation.
- The advanced options available when setting the target have been extended to include the new parameter `events_count` as a part of the `AdvancedOptions` object to allow specifying the events count column. See the user guide documentation in the webapp for more information on events count.
- `PredictJob.get_predictions` now returns predicted probability for each class in the dataframe.
- `PredictJob.get_predictions` now accepts prefix parameter to prefix the classes name returned in the predictions dataframe.

API Changes

- Add `target_type` parameter to `set_target()` and `start()`, used to override the project default.

2.5.31 2.7.2

Documentation Changes

- Updated link to the publicly hosted documentation.

2.5.32 2.7.1

Documentation Changes

- Online documentation hosting has migrated from PythonHosted to Read The Docs. Minor code changes have been made to support this.

2.5.33 2.7.0

New Features

- Lift chart data for models can be retrieved using the *Model.get_lift_chart* and *Model.get_all_lift_charts* methods.
- ROC curve data for models in classification projects can be retrieved using the *Model.get_roc_curve* and *Model.get_all_roc_curves* methods.
- Semi-automatic autopilot mode is removed.
- Word cloud data for text processing models can be retrieved using *Model.get_word_cloud* method.
- Scoring code JAR file can be downloaded for models supporting code generation.

Enhancements

- A *__repr__* method has been added to the *PredictionDataset* class to improve readability when using the client interactively.
- *Model.get_parameters* now includes an additional key in the derived features it includes, showing the coefficients for individual stages of multistage models (e.g. Frequency-Severity models).
- When training a *DatetimeModel* on a window of data, a *time_window_sample_pct* can be specified to take a uniform random sample of the training data instead of using all data within the window.
- Installing of DataRobot package now has an “Extra Requirements” section that will install all of the dependencies needed to run the example notebooks.

Documentation Changes

- A new example notebook describing how to visualize some of the newly available model insights including lift charts, ROC curves, and word clouds has been added to the examples section.
- A new section for *Common Issues* has been added to *Getting Started* to help debug issues related to client installation and usage.

2.5.34 2.6.1

Bugfixes

- Fixed a bug with *Model.get_parameters* raising an exception on some valid parameter values.

Documentation Changes

- Fixed sorting order in Feature Impact example code snippet.

2.5.35 2.6.0

New Features

- A new partitioning method (datetime partitioning) has been added. The recommended workflow is to preview the partitioning by creating a *DatetimePartitioningSpecification* and passing it into *DatetimePartitioning.generate*, inspect the results and adjust as needed for the specific project dataset by adjusting the *DatetimePartitioningSpecification* and re-generating, and then set the target by passing the final *DatetimePartitioningSpecification* object to the *partitioning_method* parameter of *Project.set_target*.
- When interacting with datetime partitioned projects, *DatetimeModel* can be used to access more information specific to models in datetime partitioned projects. See [the documentation](#) for more information on differences in the modeling workflow for datetime partitioned projects.
- The advanced options available when setting the target have been extended to include the new parameters `offset` and `exposure` (part of the *AdvancedOptions* object) to allow specifying offset and exposure columns to apply to predictions generated by models within the project. See the user guide documentation in the webapp for more information on offset and exposure columns.
- Blueprints can now be retrieved directly by *project_id* and *blueprint_id* via *Blueprint.get*.
- Blueprint charts can now be retrieved directly by *project_id* and *blueprint_id* via *BlueprintChart.get*. If you already have an instance of *Blueprint* you can retrieve its chart using *Blueprint.get_chart*.
- Model parameters can now be retrieved using *ModelParameters.get*. If you already have an instance of *Model* you can retrieve its parameters using *Model.get_parameters*.
- Blueprint documentation can now be retrieved using *Blueprint.get_documents*. It will contain information about the task, its parameters and (when available) links and references to additional sources.
- The DataRobot API now includes Reason Codes. You can now compute reason codes for prediction datasets. You are able to specify thresholds on which rows to compute reason codes for to speed up computation by skipping rows based on the predictions they generate. See the reason codes [documentation](#) for more information.

Enhancements

- A new parameter has been added to the *AdvancedOptions* used with *Project.set_target*. By specifying `accuracyOptimizedMb=True` when creating *AdvancedOptions*, longer-running models that may have a high accuracy will be included in the autopilot and made available to run manually.
- A new option for *Project.create_type_transform_feature* has been added which explicitly truncates data when casting numerical data as categorical data.
- Added 2 new blenders for projects that use MAD or Weighted MAD as a metric. The MAE blender uses BFGS optimization to find linear weights for the blender that minimize mean absolute error (compared to the GLM blender, which finds linear weights that minimize RMSE), and the MAEL1 blender uses BFGS optimization to find linear weights that minimize MAE + a L1 penalty on the coefficients (compared to the ENET blender, which minimizes RMSE + a combination of the L1 and L2 penalty on the coefficients).

Bugfixes

- Fixed a bug (affecting Python 2 only) with printing any model (including frozen and prime models) whose *model_type* is not ascii.
- FrozenModels were unable to correctly use methods inherited from Model. This has been fixed.
- When calling *get_result* for a Job, ModelJob, or PredictJob that has errored, *AsyncProcessUnsuccessfulError* will now be raised instead of *JobNotFinished*, consistently with the behavior of *get_result_when_complete*.

Deprecation Summary

- Support for the experimental Recommender Problems projects has been removed. Any code relying on *RecommenderSettings* or the *recommender_settings* argument of *Project.set_target* and *Project.start* will error.
- *Project.update*, deprecated in v2.2.32, has been removed in favor of specific updates: *rename*, *unlock_holdout*, *set_worker_count*.

Documentation Changes

- The link to Configuration from the Quickstart page has been fixed.

2.5.36 2.5.1

Bugfixes

- Fixed a bug (affecting Python 2 only) with printing blueprints whose names are not ascii.
- Fixed an issue where the weights column (for weighted projects) did not appear in the *advanced_options* of a *Project*.

2.5.37 2.5.0

New Features

- Methods to work with blender models have been added. Use *Project.blend* method to create new blenders, *Project.get_blenders* to get the list of existing blenders and *BlenderModel.get* to retrieve a model with blender-specific information.
- Projects created via the API can now use smart downsampling when setting the target by passing *smart_downsampled* and *majority_downsampling_rate* into the *AdvancedOptions* object used with *Project.set_target*. The smart sampling options used with an existing project will be available as part of *Project.advanced_options*.
- Support for frozen models, which use tuning parameters from a parent model for more efficient training, has been added. Use *Model.request_frozen_model* to create a new frozen model, *Project.get_frozen_models* to get the list of existing frozen models and *FrozenModel.get* to retrieve a particular frozen model.

Enhancements

- The inferred date format (e.g. `âĀĪJ%Y-%m-%d %H:%M:%SâĀĪ`) is now included in the Feature object. For non-date features, it will be None.
- When specifying the API endpoint in the configuration, the client will now behave correctly for endpoints with and without trailing slashes.

2.5.38 2.4.0

New Features

- The premium add-on product *DataRobot Prime* has been added. You can now approximate a model on the leaderboard and download executable code for it. See documentation for further details, or talk to your account representative if the feature is not available on your account.
- (Only relevant for on-premise users with a Standalone Scoring cluster.) Methods (*request_transferable_export* and *download_export*) have been added to the *Model* class for exporting models (which will only work if model export is turned on). There is a new class *ImportedModel* for managing imported models on a Standalone Scoring cluster.
- It is now possible to create projects from a WebHDFS, PostgreSQL, Oracle or MySQL data source. For more information see the documentation for the relevant *Project* classmethods: *create_from_hdfs*, *create_from_postgresql*, *create_from_oracle* and *create_from_mysql*.
- *Job.wait_for_completion*, which waits for a job to complete without returning anything, has been added.

Enhancements

- The client will now check the API version offered by the server specified in configuration, and give a warning if the client version is newer than the server version. The DataRobot server is always backwards compatible with old clients, but new clients may have functionality that is not implemented on older server versions. This issue mainly affects users with on-premise deployments of DataRobot.

Bugfixes

- Fixed an issue where *Model.request_predictions* might raise an error when predictions finished very quickly instead of returning the job.

API Changes

- To set the target with quickrun autopilot, call *Project.set_target* with *mode=AUTOPILOT_MODE.QUICK* instead of specifying *quickrun=True*.

Deprecation Summary

- Semi-automatic mode for autopilot has been deprecated and will be removed in 3.0. Use manual or fully automatic instead.
- Use of the *quickrun* argument in *Project.set_target* has been deprecated and will be removed in 3.0. Use *mode=AUTOPILOT_MODE.QUICK* instead.

Configuration Changes

- It is now possible to control the SSL certificate verification by setting the parameter *ssl_verify* in the config file.

Documentation Changes

- The *Modeling Airline Delay* example notebook has been updated to work with the new 2.3 enhancements.
- Documentation for the generic *Job* class has been added.

- Class attributes are now documented in the *API Reference* section of the documentation.
- The changelog now appears in the documentation.
- There is a new section dedicated to configuration, which lists all of the configuration options and their meanings.

2.5.39 2.3.0

New Features

- The DataRobot API now includes Feature Impact, an approach to measuring the relevance of each feature that can be applied to any model. The *Model* class now includes methods *request_feature_impact* (which creates and returns a feature impact job) and *get_feature_impact* (which can retrieve completed feature impact results).
- A new improved workflow for predictions now supports first uploading a dataset via *Project.upload_dataset*, then requesting predictions via *Model.request_predictions*. This allows us to better support predictions on larger datasets and non-ascii files.
- Datasets previously uploaded for predictions (represented by the *PredictionDataset* class) can be listed from *Project.get_datasets* and retrieve and deleted via *PredictionDataset.get* and *PredictionDataset.delete*.
- You can now create a new feature by re-interpreting the type of an existing feature in a project by using the *Project.create_type_transform_feature* method.
- The *Job* class now includes a *get* method for retrieving a job and a *cancel* method for canceling a job.
- All of the jobs classes (*Job*, *ModelJob*, *PredictJob*) now include the following new methods: *refresh* (for refreshing the data in the job object), *get_result* (for getting the completed resource resulting from the job), and *get_result_when_complete* (which waits until the job is complete and returns the results, or times out).
- A new method *Project.refresh* can be used to update *Project* objects with the latest state from the server.
- A new function *datarobot.async.wait_for_async_resolution* can be used to poll for the resolution of any generic asynchronous operation on the server.

Enhancements

- The *JOB_TYPE* enum now includes *FEATURE_IMPACT*.
- The *QUEUE_STATUS* enum now includes *ABORTED* and *COMPLETED*.
- The *Project.create* method now has a *read_timeout* parameter which can be used to keep open the connection to DataRobot while an uploaded file is being processed. For very large files this time can be substantial. Appropriately raising this value can help avoid timeouts when uploading large files.
- The method *Project.wait_for_autopilot* has been enhanced to error if the project enters a state where autopilot may not finish. This avoids a situation that existed previously where users could wait indefinitely on their project that was not going to finish. However, users are still responsible to make sure a project has more than zero workers, and that the queue is not paused.
- *Feature.get* now supports retrieving features by feature name. (For backwards compatibility, feature IDs are still supported until 3.0.)
- File paths that have unicode directory names can now be used for creating projects and PredictJobs. The filename itself must still be ascii, but containing directory names can have other encodings.
- Now raises more specific *JobAlreadyRequested* exception when we refuse a model fitting request as a duplicate. Users can explicitly catch this exception if they want it to be ignored.

- A *file_name* attribute has been added to the *Project* class, identifying the file name associated with the original project dataset. Note that if the project was created from a data frame, the file name may not be helpful.
- The connect timeout for establishing a connection to the server can now be set directly. This can be done in the yaml configuration of the client, or directly in the code. The default timeout has been lowered from 60 seconds to 6 seconds, which will make detecting a bad connection happen much quicker.

Bugfixes

- Fixed a bug (affecting Python 2 only) with printing features and featurelists whose names are not ascii.

API Changes

- Job class hierarchy is rearranged to better express the relationship between these objects. See documentation for *datarobot.models.job* for details.
- *Featurelist* objects now have a *project_id* attribute to indicate which project they belong to. Directly accessing the *project* attribute of a *Featurelist* object is now deprecated
- Support INI-style configuration, which was deprecated in v2.1, has been removed. yaml is the only supported configuration format.
- The method *Project.get_jobs* method, which was deprecated in v2.1, has been removed. Users should use the *Project.get_model_jobs* method instead to get the list of model jobs.

Deprecation Summary

- *PredictJob.create* has been deprecated in favor of the alternate workflow using *Model.request_predictions*.
- *Feature.converter* (used internally for object construction) has been made private.
- **Model.fetch_resource_data has been deprecated and will be removed in 3.0. To fetch a model from its ID, use Model.get.**
- The ability to use *Feature.get* with feature IDs (rather than names) is deprecated and will be removed in 3.0.
- Instantiating a *Project*, *Model*, *Blueprint*, *Featurelist*, or *Feature* instance from a *dict* of data is now deprecated. Please use the *from_data* classmethod of these classes instead. Additionally, instantiating a *Model* from a tuple or by using the keyword argument *data* is also deprecated.
- Use of the attribute *Featurelist.project* is now deprecated. You can use the *project_id* attribute of a *Featurelist* to instantiate a *Project* instance using *Project.get*.
- Use of the attributes *Model.project*, *Model.blueprint*, and *Model.featurelist* are all deprecated now to avoid use of partially instantiated objects. Please use the ids of these objects instead.
- Using a *Project* instance as an argument in *Featurelist.get* is now deprecated. Please use a *project_id* instead. Similarly, using a *Project* instance in *Model.get* is also deprecated, and a *project_id* should be used in its place.

Configuration Changes

- Previously it was possible (though unintended) that the client configuration could be mixed through environment variables, configuration files, and arguments to *datarobot.Client*. This logic is now simpler - please see the *Getting Started* section of the documentation for more information.

2.5.40 2.2.33

Bugfixes

- Fixed a bug with non-ascii project names using the package with Python 2.
- Fixed an error that occurred when printing projects that had been constructed from an ID only or printing printing models that had been constructed from a tuple (which impacted printing PredictJobs).
- Fixed a bug with project creation from non-ascii file names. Project creation from non-ascii file names is not supported, so this now raises a more informative exception. The project name is no longer used as the file name in cases where we do not have a file name, which prevents non-ascii project names from causing problems in those circumstances.
- Fixed a bug (affecting Python 2 only) with printing projects, features, and featurelists whose names are not ascii.

2.5.41 2.2.32

New Features

- `Project.get_features` and `Feature.get` methods have been added for feature retrieval.
- A generic `Job` entity has been added for use in retrieving the entire queue at once. Calling `Project.get_all_jobs` will retrieve all (appropriately filtered) jobs from the queue. Those can be cancelled directly as generic jobs, or transformed into instances of the specific job class using `ModelJob.from_job` and `PredictJob.from_job`, which allow all functionality previously available via the `ModelJob` and `PredictJob` interfaces.
- `Model.train` now supports `featurelist_id` and `scoring_type` parameters, similar to `Project.train`.

Enhancements

- Deprecation warning filters have been updated. By default, a filter will be added ensuring that usage of deprecated features will display a warning once per new usage location. In order to hide deprecation warnings, a filter like `warnings.filterwarnings("ignore", category=DataRobotDeprecationWarning)` can be added to a script so no such warnings are shown. Watching for deprecation warnings to avoid reliance on deprecated features is recommended.
- If your client is misconfigured and does not specify an endpoint, the cloud production server is no longer used as the default as in many cases this is not the correct default.
- This changelog is now included in the distributable of the client.

Bugfixes

- Fixed an issue where updating the global client would not affect existing objects with cached clients. Now the global client is used for every API call.
- An issue where mistyping a filepath for use in a file upload has been resolved. Now an error will be raised if it looks like the raw string content for modeling or predictions is just one single line.

API Changes

- Use of username and password to authenticate is no longer supported - use an API token instead.
- Usage of `start_time` and `finish_time` parameters in `Project.get_models` is not supported both in filtering and ordering of models
- Default value of `sample_pct` parameter of `Model.train` method is now `None` instead of `100`. If the default value is used, models will be trained with all of the available *training* data based on project configuration, rather than with entire dataset including holdout for the previous default value of `100`.
- `order_by` parameter of `Project.list` which was deprecated in v2.0 has been removed.
- `recommendation_settings` parameter of `Project.start` which was deprecated in v0.2 has been removed.
- `Project.status` method which was deprecated in v0.2 has been removed.
- `Project.wait_for_aim_stage` method which was deprecated in v0.2 has been removed.
- `Delay`, `ConstantDelay`, `NoDelay`, `ExponentialBackoffDelay`, `RetryManager` classes from `retry` module which were deprecated in v2.1 were removed.
- Package renamed to `datarobot`.

Deprecation Summary

- `Project.update` deprecated in favor of specific updates: `rename`, `unlock_holdout`, `set_worker_count`.

Documentation Changes

- A new use case involving financial data has been added to the `examples` directory.
- Added documentation for the partition methods.

2.5.42 2.1.31

Bugfixes

- In Python 2, using a unicode token to instantiate the client will now work correctly.

2.5.43 2.1.30

Bugfixes

- The minimum required version of `trafaret` has been upgraded to `0.7.1` to get around an incompatibility between it and `setuptools`.

2.5.44 2.1.29

Enhancements

- Minimal used version of `requests_toolbelt` package changed from `0.4` to `0.6`

2.5.45 2.1.28

New Features

- Default to reading YAML config file from `~/config/datarobot/drconfig.yaml`
- Allow `config_path` argument to client
- `wait_for_autopilot` method added to `Project`. This method can be used to block execution until autopilot has finished running on the project.
- Support for specifying which featurelist to use with initial autopilot in `Project.set_target`
- `Project.get_predict_jobs` method has been added, which looks up all prediction jobs for a project
- `Project.start_autopilot` method has been added, which starts autopilot on specified featurelist
- The schema for `PredictJob` in DataRobot API v2.1 now includes a `message`. This attribute has been added to the `PredictJob` class.
- `PredictJob.cancel` now exists to cancel prediction jobs, mirroring `ModelJob.cancel`
- `Project.from_async` is a new classmethod that can be used to wait for an async resolution in project creation. Most users will not need to know about it as it is used behind the scenes in `Project.create` and `Project.set_target`, but power users who may run into periodic connection errors will be able to catch the new `ProjectAsyncFailureError` and decide if they would like to resume waiting for async process to resolve

Enhancements

- `AUTOPILOT_MODE` enum now uses string names for autopilot modes instead of numbers

Deprecation Summary

- `ConstantDelay`, `NoDelay`, `ExponentialBackoffDelay`, and `RetryManager` utils are now deprecated
- INI-style config files are now deprecated (in favor of YAML config files)
- Several functions in the `utils` submodule are now deprecated (they are being moved elsewhere and are not considered part of the public interface)
- `Project.get_jobs` has been renamed `Project.get_model_jobs` for clarity and deprecated
- Support for the experimental date partitioning has been removed in DataRobot API, so it is being removed from the client immediately.

API Changes

- In several places where `AppPlatformError` was being raised, now `TypeError`, `ValueError` or `InputNotUnderstoodError` are now used. With this change, one can now safely assume that when catching an `AppPlatformError` it is because of an unexpected response from the server.
- `AppPlatformError` has gained a two new attributes, `status_code` which is the HTTP status code of the unexpected response from the server, and `error_code` which is a DataRobot-defined error code. `error_code` is not used by any routes in DataRobot API 2.1, but will be in the future. In cases where it is not provided, the instance of `AppPlatformError` will have the attribute `error_code` set to `None`.

- Two new subclasses of `AppPlatformError` have been introduced, `ClientError` (for 400-level response status codes) and `ServerError` (for 500-level response status codes). These will make it easier to build automated tooling that can recover from periodic connection issues while polling.
- If a `ClientError` or `ServerError` occurs during a call to `Project.from_async`, then a `ProjectAsyncFailureError` (a subclass of `AsyncFailureError`) will be raised. That exception will have the `status_code` of the unexpected response from the server, and the location that was being polled to wait for the asynchronous process to resolve.

2.5.46 2.0.27

New Features

- `PredictJob` class was added to work with prediction jobs
- `wait_for_async_predictions` function added to `predict_job` module

Deprecation Summary

- The `order_by` parameter of the `Project.list` is now deprecated.

2.5.47 0.2.26

Enhancements

- `Project.set_target` will re-fetch the project data after it succeeds, keeping the client side in sync with the state of the project on the server
- `Project.create_featurelist` now throws `DuplicateFeaturesError` exception if passed list of features contains duplicates
- `Project.get_models` now supports `snake_case` arguments to its `order_by` keyword

Deprecation Summary

- `Project.wait_for_aim_stage` is now deprecated, as the REST Async flow is a more reliable method of determining that project creation has completed successfully
- `Project.status` is deprecated in favor of `Project.get_status`
- `recommendation_settings` parameter of `Project.start` is deprecated in favor of `recommender_settings`

Bugfixes

- `Project.wait_for_aim_stage` changed to support Python 3
- Fixed incorrect value of `SCORING_TYPE.cross_validation`
- Models returned by `Project.get_models` will now be correctly ordered when the `order_by` keyword is used

2.5.48 0.2.25

- Pinned versions of required libraries

2.5.49 0.2.24

Official release of v0.2

2.5.50 0.1.24

- Updated documentation
- Renamed parameter *name* of *Project.create* and *Project.start* to *project_name*
- Removed *Model.predict* method
- *wait_for_async_model_creation* function added to *modeljob* module
- *wait_for_async_status_service* of *Project* class renamed to *_wait_for_async_status_service*
- Can now use *auth_token* in config file to configure SDK

2.5.51 0.1.23

- Fixes a method that pointed to a removed route

2.5.52 0.1.22

- Added *featurelist_id* attribute to *ModelJob* class

2.5.53 0.1.21

- Removes *model* attribute from *ModelJob* class

2.5.54 0.1.20

- Project creation raises *AsyncProjectCreationError* if it was unsuccessful
- Removed *Model.list_prime_rulesets* and *Model.get_prime_ruleset* methods
- Removed *Model.predict_batch* method
- Removed *Project.create_prime_model* method
- Removed *PrimeRuleSet* model
- Adds backwards compatibility bridge for *ModelJob* async
- Adds *ModelJob.get* and *ModelJob.get_model*

2.5.55 0.1.19

- Minor bugfixes in *wait_for_async_status_service*

2.5.56 0.1.18

- Removes *submit_model* from Project until server-side implementation is improved
- Switches training URLs for new resource-based route at `/projects/<project_id>/models/`
- Job renamed to ModelJob, and using modelJobs route
- Fixes an inconsistency in argument order for *train* methods

2.5.57 0.1.17

- *wait_for_async_status_service* timeout increased from 60s to 600s

2.5.58 0.1.16

- *Project.create* will now handle both async/sync project creation

2.5.59 0.1.15

- All routes pluralized to sync with changes in API
- *Project.get_jobs* will request all jobs when no param specified
- dataframes from *predict* method will have pythonic names
- *Project.get_status* created, *Project.status* now deprecated
- *Project.unlock_holdout* created.
- Added *quickrun* parameter to *Project.set_target*
- Added *modelCategory* to Model schema
- Add *permalinks* feature to Project and Model objects.
- *Project.create_prime_model* created

2.5.60 0.1.14

- *Project.set_worker_count* fix for compatibility with API change in project update.

2.5.61 0.1.13

- Add positive class to *set_target*.
- **Change attributes names of *Project*, *Model*, *Job* and *Blueprint***
 - *features* in *Model*, *Job* and *Blueprint* are now *processes*
 - *dataset_id* and *dataset_name* migrated to *featurelist_id* and *featurelist_name*.
 - *samplepct* -> *sample_pct*
- *Model* has now *blueprint*, *project*, and *featurlist* attributes.
- Minor bugfixes.

2.5.62 0.1.12

- Minor fixes regarding rename *Job* attributes. *features* attributes now named *processes*, *samplepct* now is *sample_pct*.

2.5.63 0.1.11

(May 27, 2015)

- Minor fixes regarding migrating API from under_score names to camelCase.

2.5.64 0.1.10

(May 20, 2015)

- Remove *Project.upload_file*, *Project.upload_file_from_url* and *Project.attach_file* methods. Moved all logic that uploading file to *Project.create* method.

2.5.65 0.1.9

(May 15, 2015)

- Fix uploading file causing a lot of memory usage. Minor bugfixes.

genindex

d

`datarobot.client`, 189
`datarobot.models.training_predictions`,
559

A

- Accuracy (class in *datarobot.models*), 283
- AccuracyOverTime (class in *datarobot.models*), 284
- AccuracyOverTimePlot (class in *datarobot.models.datetime_trend_plots*), 256
- AccuracyOverTimePlotPreview (class in *datarobot.models.datetime_trend_plots*), 257
- AccuracyOverTimePlotsMetadata (class in *datarobot.models.datetime_trend_plots*), 255
- activate() (*datarobot.models.Deployment* method), 267
- add_to_project() (*datarobot.UserBlueprint* class method), 568
- advanced_tune() (*datarobot.models.BlenderModel* method), 380
- advanced_tune() (*datarobot.models.DatetimeModel* method), 422
- advanced_tune() (*datarobot.models.Model* method), 354
- advanced_tune() (*datarobot.models.PrimeModel* method), 360
- advanced_tune() (*datarobot.models.RatingTableModel* method), 441
- AdvancedOptions (class in *datarobot.helpers*), 151
- AdvancedTuningSession (class in *datarobot.models.advanced_tuning*), 464
- analyze_and_model() (*datarobot.models.Project* method), 515
- AnomalyAssessmentExplanations (class in *datarobot.models.anomaly_assessment*), 157
- AnomalyAssessmentPredictionsPreview (class in *datarobot.models.anomaly_assessment*), 159
- AnomalyAssessmentRecord (class in *datarobot.models.anomaly_assessment*), 154
- AnomalyOverTimePlot (class in *datarobot.models.datetime_trend_plots*), 261
- AnomalyOverTimePlotPreview (class in *datarobot.models.datetime_trend_plots*), 262
- AnomalyOverTimePlotsMetadata (class in *datarobot.models.datetime_trend_plots*), 260
- apply_bias_mitigation() (*datarobot.models.Project* method), 546
- apply_time_series_data_prep_and_score() (*datarobot.models.BatchPredictionJob* class method), 164
- apply_time_series_data_prep_and_score_to_file() (*datarobot.models.BatchPredictionJob* class method), 166
- as_dataframe() (*datarobot.models.PairwiseConditionalProbabilities* method), 301
- as_dataframe() (*datarobot.models.PairwiseCorrelations* method), 299
- as_dataframe() (*datarobot.models.PairwiseJointProbabilities* method), 300
- assign_training_data() (*datarobot.CustomInferenceModel* method), 205
- AutomatedDocument (class in *datarobot.models.automated_documentation*), 184

B

- Backtest (class in *datarobot.helpers.partitioning_methods*), 483
- BacktestSpecification (class in *datarobot*), 474
- batch_features_type_transform() (*datarobot.models.Project* method), 542
- BatchPredictionJob (class in *datarobot.models*), 160
- BatchPredictionJobDefinition (class in *datarobot.models*), 169
- blend() (*datarobot.models.Project* method), 533
- BlenderModel (class in *datarobot.models*), 379
- Blueprint (class in *datarobot.models*), 175

- BlueprintChart (class in datarobot.models), 176
- BlueprintTaskDocument (class in datarobot.models), 176
- bucket_sample_sizes (datarobot.models.AccuracyOverTime attribute), 286
- bucket_values (datarobot.models.AccuracyOverTime attribute), 286
- bucket_values (datarobot.models.ServiceStatsOverTime attribute), 281
- ## C
- calculate_feature_impact() (datarobot.CustomModelVersion method), 212
- calculate_prediction_intervals() (datarobot.models.DatetimeModel method), 413
- CalendarFile (class in datarobot), 177
- cancel() (datarobot.CustomModelTest method), 207
- cancel() (datarobot.CustomModelVersionDependencyBuild method), 215
- cancel() (datarobot.models.FeatureImpactJob method), 331
- cancel() (datarobot.models.Job method), 327
- cancel() (datarobot.models.ModelJob method), 467
- cancel() (datarobot.models.PredictJob method), 491
- cancel() (datarobot.models.ShapMatrixJob method), 329
- cancel() (datarobot.models.TrainingPredictionsJob method), 328
- cancel_dependency_build() (datarobot.CustomTaskVersion method), 227
- check_blendable() (datarobot.models.Project method), 534
- ClassListMode (class in datarobot.models), 502
- ClassMappingAggregationSettings (class in datarobot.helpers), 188
- Client() (in module datarobot.client), 189
- client_configuration() (in module datarobot.client), 189
- clone_project() (datarobot.models.Project method), 543
- clone_project_blueprint() (datarobot.UserBlueprint class method), 567
- clone_user_blueprint() (datarobot.UserBlueprint class method), 567
- Cluster (class in datarobot.models.cluster), 192
- Cluster (class in datarobot.models.model), 73
- ClusteringModel (class in datarobot.models.model), 72
- ClusterInsight (class in datarobot.models.cluster_insight), 193
- ClusterInsight (class in datarobot.models.model), 74
- clusters (datarobot.models.ClusteringModel attribute), 191
- clusters (datarobot.models.model.ClusteringModel attribute), 73
- collect_payload() (datarobot._experimental.helpers.partitioning_methods.Datetime method), 581
- collect_payload() (datarobot.DatetimePartitioningSpecification method), 474
- collect_payload() (datarobot.FeatureSettings method), 476
- collect_payload() (datarobot.models.segmentation.SegmentationTask method), 557
- collect_payload() (datarobot.SegmentationTask method), 554
- CombinedModel (class in datarobot), 552
- ComplianceDocTemplate (class in datarobot.models.compliance_doc_template), 194
- compute() (datarobot._experimental.models.documentai.document.Document class method), 588
- compute() (datarobot.models.anomaly_assessment.AnomalyAssessment class method), 156
- compute() (datarobot.models.cluster_insight.ClusterInsight class method), 193
- compute() (datarobot.models.model.ClusterInsight class method), 75
- compute() (datarobot.models.visualai.ImageActivationMap class method), 574
- compute() (datarobot.models.visualai.ImageEmbedding class method), 573
- compute_datetime_trend_plots() (datarobot.models.DatetimeModel method), 413
- compute_insights() (datarobot.models.ClusteringModel method), 191
- compute_insights() (datarobot.models.model.ClusteringModel method), 72
- compute_samples() (datarobot.models.visualai.ImageAugmentationList method), 577
- compute_series_accuracy() (datarobot.models.DatetimeModel method), 407

ConfusionChart (class in `datarobot.models.confusion_chart`), 196
 Connector (class in `datarobot`), 229
 construct_duration_string() (in module `datarobot.helpers.partitioning_methods`), 486
 copy() (`datarobot.CustomTask` class method), 221
 copy_custom_model() (`datarobot.CustomInferenceModel` class method), 204
 create() (`datarobot.CalendarFile` class method), 178
 create() (`datarobot.Connector` class method), 230
 create() (`datarobot.CustomInferenceModel` class method), 203
 create() (`datarobot.CustomModelTest` class method), 206
 create() (`datarobot.CustomTask` class method), 221
 create() (`datarobot.DataDriver` class method), 228
 create() (`datarobot.DataEngineQueryGenerator` class method), 252
 create() (`datarobot.DataSource` class method), 236
 create() (`datarobot.DataStore` class method), 232
 create() (`datarobot.ExecutionEnvironment` class method), 216
 create() (`datarobot.ExecutionEnvironmentVersion` class method), 217
 create() (`datarobot.ExternalScores` class method), 287
 create() (`datarobot.models.BatchPredictionJobDefinition` class method), 170
 create() (`datarobot.models.compliance_doc_template.ComplianceDocTemplate` class method), 195
 create() (`datarobot.models.ImportedModel` class method), 439
 create() (`datarobot.models.PayoffMatrix` class method), 487
 create() (`datarobot.models.Project` class method), 508
 create() (`datarobot.models.RatingTable` class method), 549
 create() (`datarobot.models.RelationshipsConfiguration` class method), 306
 create() (`datarobot.models.SecondaryDatasetConfigurations` class method), 313
 create() (`datarobot.models.segmentation.SegmentationTask` class method), 557
 create() (`datarobot.models.ShapImpact` class method), 558
 create() (`datarobot.models.ShapMatrix` class method), 501
 create() (`datarobot.models.visualai.ImageAugmentationList` class method), 576
 create() (`datarobot.PredictionExplanations` class method), 495
 create() (`datarobot.PredictionExplanationsInitialization` class method), 494
 create() (`datarobot.SegmentationTask` class method), 555
 create() (`datarobot.UserBlueprint` class method), 566
 create_azure() (`datarobot.models.Credential` class method), 200
 create_basic() (`datarobot.models.Credential` class method), 198
 create_calendar_from_country_code() (`datarobot.CalendarFile` class method), 180
 create_calendar_from_dataset() (`datarobot.CalendarFile` class method), 179
 create_clean() (`datarobot.CustomModelVersion` class method), 208
 create_clean() (`datarobot.CustomTaskVersion` class method), 224
 create_dataset() (`datarobot.DataEngineQueryGenerator` class method), 253
 create_dataset() (`datarobot.DataSource` method), 238
 create_featurelist() (`datarobot.models.Dataset` method), 246
 create_featurelist() (`datarobot.models.Project` method), 527
 create_from_custom_model_version() (`datarobot.models.Deployment` class method), 264
 create_from_custom_task_version_id() (`datarobot.models.UserBlueprint` class method), 566
 create_from_data_source() (`datarobot.models.Dataset` class method), 242
 create_from_data_source() (`datarobot.models.Project` class method), 509
 create_from_dataset() (`datarobot.models.Project` class method), 510
 create_from_file() (`datarobot.models.Dataset` class method), 240
 create_from_hdfs() (`datarobot.models.Project` class method), 509
 create_from_in_memory_data() (`datarobot.models.Dataset` class method), 241
 create_from_json_file() (`datarobot.models.compliance_doc_template.ComplianceDocTemplate` class method), 195
 create_from_learning_model() (`datarobot.models.Deployment` class method), 264
 create_from_previous() (`datarobot.CustomModelVersion` class method), 208

- `method`), 209
 - `create_from_previous()` (*datarobot.CustomTaskVersion class method*), 225
 - `create_from_query_generator()` (*datarobot.models.Dataset class method*), 243
 - `create_from_rating_table()` (*datarobot.models.RatingTableModel class method*), 441
 - `create_from_url()` (*datarobot.models.Dataset class method*), 241
 - `create_gcp()` (*datarobot.models.Credential class method*), 200
 - `create_interaction_feature()` (*datarobot.models.Project method*), 543
 - `create_model()` (*datarobot.models.pareto_front.Solution method*), 469
 - `create_model()` (*datarobot.models.RatingTable method*), 549
 - `create_modeling_featurelist()` (*datarobot.models.Project method*), 528
 - `create_oauth()` (*datarobot.models.Credential class method*), 199
 - `create_project()` (*datarobot.models.Dataset method*), 247
 - `create_s3()` (*datarobot.models.Credential class method*), 199
 - `create_segmented_project_from_clustering_model()` (*datarobot.models.Project class method*), 511
 - `create_type_transform_feature()` (*datarobot.models.Project method*), 526
 - `create_version_from_data_source()` (*datarobot.models.Dataset class method*), 249
 - `create_version_from_file()` (*datarobot.models.Dataset class method*), 248
 - `create_version_from_in_memory_data()` (*datarobot.models.Dataset class method*), 248
 - `create_version_from_url()` (*datarobot.models.Dataset class method*), 249
 - `Credential` (*class in datarobot.models*), 197
 - `cross_validate()` (*datarobot.CombinedModel method*), 554
 - `cross_validate()` (*datarobot.models.BlenderModel method*), 380
 - `cross_validate()` (*datarobot.models.DatetimeModel method*), 406
 - `cross_validate()` (*datarobot.models.Model method*), 353
 - `cross_validate()` (*datarobot.models.PrimeModel method*), 360
 - `cross_validate()` (*datarobot.models.RatingTableModel method*), 442
 - `CustomInferenceModel` (*class in datarobot*), 201
 - `CustomModelFileItem` (*class in datarobot.models.custom_model_version*), 201
 - `CustomModelTest` (*class in datarobot*), 205
 - `CustomModelVersion` (*class in datarobot*), 208
 - `CustomModelVersionConversion` (*class in datarobot.models*), 212
 - `CustomModelVersionDependencyBuild` (*class in datarobot*), 214
 - `CustomTask` (*class in datarobot*), 219
 - `CustomTaskFileItem` (*class in datarobot.models.custom_task_version*), 223
 - `CustomTaskVersion` (*class in datarobot*), 224
- ## D
- `DataDriver` (*class in datarobot*), 228
 - `DataEngineQueryGenerator` (*class in datarobot*), 252
 - `datarobot.client` (*module*), 189
 - `datarobot.models.training_predictions` (*module*), 559
 - `Dataset` (*class in datarobot.models*), 239
 - `DatasetDefinition` (*class in datarobot.helpers.feature_discovery*), 308
 - `DatasetDetails` (*class in datarobot*), 250
 - `DatasetFeature` (*class in datarobot.models*), 295
 - `DatasetFeatureHistogram` (*class in datarobot.models*), 296
 - `DatasetFeaturelist` (*class in datarobot*), 321
 - `DataSource` (*class in datarobot*), 235
 - `DataSourceParameters` (*class in datarobot*), 239
 - `DataStore` (*class in datarobot*), 231
 - `datetime_partitioning_log_retrieve()` (*datarobot._experimental.helpers.partitioning_methods.Datetime class method*), 581
 - `DatetimeModel` (*class in datarobot._experimental.models.model*), 582
 - `DatetimeModel` (*class in datarobot.models*), 403
 - `DatetimePartitioning` (*class in datarobot*), 476
 - `DatetimePartitioning` (*class in datarobot._experimental.helpers.partitioning_methods*), 579
 - `DatetimePartitioningId` (*class in datarobot._experimental.helpers.partitioning_methods*), 581
 - `DatetimePartitioningSpecification` (*class in datarobot*), 471
 - `deactivate()` (*datarobot.models.Deployment method*), 267

[delete\(\) \(datarobot._experimental.models.retraining.RetainingPolicy class method\), 593](#)
[delete\(\) \(datarobot.CalendarFile class method\), 181](#)
[delete\(\) \(datarobot.Connector method\), 231](#)
[delete\(\) \(datarobot.CustomInferenceModel method\), 205](#)
[delete\(\) \(datarobot.CustomTask method\), 222](#)
[delete\(\) \(datarobot.DataDriver method\), 229](#)
[delete\(\) \(datarobot.DatasetFeaturerelist method\), 321](#)
[delete\(\) \(datarobot.DataSource method\), 237](#)
[delete\(\) \(datarobot.DataStore method\), 233](#)
[delete\(\) \(datarobot.ExecutionEnvironment method\), 217](#)
[delete\(\) \(datarobot.models.anomaly_assessment.AnomalyAssessmentRecord method\), 156](#)
[delete\(\) \(datarobot.models.automated_documentation.AutomatedDocumentation method\), 186](#)
[delete\(\) \(datarobot.models.BatchPredictionJob method\), 169](#)
[delete\(\) \(datarobot.models.BatchPredictionJobDefinition method\), 174](#)
[delete\(\) \(datarobot.models.BlenderModel method\), 381](#)
[delete\(\) \(datarobot.models.compliance_doc_template.ComplianceDocTemplate method\), 196](#)
[delete\(\) \(datarobot.models.Credential method\), 198](#)
[delete\(\) \(datarobot.models.Dataset class method\), 243](#)
[delete\(\) \(datarobot.models.DatetimeModel method\), 422](#)
[delete\(\) \(datarobot.models.Deployment method\), 267](#)
[delete\(\) \(datarobot.models.Featurelist method\), 322](#)
[delete\(\) \(datarobot.models.ImportedModel method\), 439](#)
[delete\(\) \(datarobot.models.Model method\), 336](#)
[delete\(\) \(datarobot.models.ModelingFeaturerelist method\), 324](#)
[delete\(\) \(datarobot.models.PayoffMatrix class method\), 488](#)
[delete\(\) \(datarobot.models.PredictionDataset method\), 493](#)
[delete\(\) \(datarobot.models.PrimeModel method\), 360](#)
[delete\(\) \(datarobot.models.Project method\), 515](#)
[delete\(\) \(datarobot.models.RatingTableModel method\), 442](#)
[delete\(\) \(datarobot.models.RelationshipsConfiguration method\), 308](#)
[delete\(\) \(datarobot.models.SecondaryDatasetConfigurations method\), 314](#)
[delete\(\) \(datarobot.PredictionExplanations method\), 498](#)
[delete\(\) \(datarobot.PredictionExplanationsInitialization method\), 494](#)
[delete_monitoring_data\(\) \(datarobot.models.Deployment method\), 279](#)
[Deployment \(class in datarobot.models\), 263](#)
[DeploymentListFilters \(class in datarobot.models.deployment\), 280](#)
[DiscardedFeaturesInfo \(class in datarobot.models.restore_discarded_features\), 325](#)
[DocumentPageFile \(class in datarobot._experimental.models.documentai.document\), 584](#)
[DocumentTextExtractionSample \(class in datarobot._experimental.models.documentai.document\), 586](#)
[DocumentTextExtractionSampleDocument \(class in datarobot._experimental.models.documentai.document\), 589](#)
[DocumentTextExtractionSamplePage \(class in datarobot._experimental.models.documentai.document\), 590](#)
[DocumentThumbnail \(class in datarobot._experimental.models.documentai.document\), 585](#)
[download\(\) \(datarobot.CustomModelVersion method\), 211](#)
[download\(\) \(datarobot.CustomTaskVersion method\), 226](#)
[download\(\) \(datarobot.ExecutionEnvironmentVersion method\), 219](#)
[download\(\) \(datarobot.models.automated_documentation.AutomatedDocumentation method\), 186](#)
[download\(\) \(datarobot.models.BatchPredictionJob method\), 169](#)
[download\(\) \(datarobot.models.PrimeFile method\), 506](#)
[download\(\) \(datarobot.models.RatingTable method\), 549](#)
[download_dependency_build_log\(\) \(datarobot.CustomTaskVersion method\), 227](#)
[download_export\(\) \(datarobot.models.BlenderModel method\), 381](#)
[download_export\(\) \(datarobot.models.DatetimeModel method\), 422](#)
[download_export\(\) \(datarobot.models.Model method\), 346](#)
[download_export\(\) \(datarobot.models.PrimeModel method\), 360](#)
[download_export\(\) \(datarobot.models.RatingTableModel method\), 442](#)

- 442
 download_feature_discovery_dataset() (*datarobot.models.Project* method), 544
 download_feature_discovery_recipe_sqls() (*datarobot.models.Project* method), 544
 download_latest_version() (*datarobot.CustomInferenceModel* method), 203
 download_latest_version() (*datarobot.CustomTask* method), 222
 download_multicategorical_data_format_errors() (*datarobot.models.Project* method), 545
 download_prediction_results() (*datarobot.models.Deployment* method), 278
 download_scoring_code() (*datarobot.models.BlenderModel* method), 381
 download_scoring_code() (*datarobot.models.DatetimeModel* method), 422
 download_scoring_code() (*datarobot.models.Deployment* method), 279
 download_scoring_code() (*datarobot.models.Model* method), 352
 download_scoring_code() (*datarobot.models.PrimeModel* method), 360
 download_scoring_code() (*datarobot.models.RatingTableModel* method), 442
 download_series_accuracy_as_csv() (*datarobot.models.DatetimeModel* method), 407
 download_to_csv() (*datarobot.models.Predictions* method), 505
 download_to_csv() (*datarobot.models.training_predictions.TrainingPredictions* method), 564
 download_to_csv() (*datarobot.PredictionExplanations* method), 498
 download_training_artifact() (*datarobot.models.BlenderModel* method), 381
 download_training_artifact() (*datarobot.models.DatetimeModel* method), 422
 download_training_artifact() (*datarobot.models.Model* method), 356
 download_training_artifact() (*datarobot.models.PrimeModel* method), 360
 download_training_artifact() (*datarobot.models.RatingTableModel* method), 442
 DuplicateImage (*class* in *datarobot.models.visualai*), 572
E
 EligibilityResult (*class* in *datarobot.helpers.eligibility_result*), 548
 encrypted_string() (*datarobot.models.Project* class method), 509
 ExecutionEnvironment (*class* in *datarobot*), 215
 ExecutionEnvironmentVersion (*class* in *datarobot*), 217
 ExternalLiftChart (*class* in *datarobot*), 288
 ExternalRocCurve (*class* in *datarobot*), 288
 ExternalScores (*class* in *datarobot*), 286
F
 Feature (*class* in *datarobot.models*), 290
 feature_log_list() (*datarobot.DatetimePartitioning* class method), 481
 feature_log_retrieve() (*datarobot.DatetimePartitioning* class method), 482
 FeatureAssociationFeaturelists (*class* in *datarobot.models*), 304
 FeatureAssociationMatrix (*class* in *datarobot.models*), 301
 FeatureAssociationMatrixDetails (*class* in *datarobot.models*), 303
 FeatureDrift (*class* in *datarobot.models*), 282
 FeatureEffectMetadata (*class* in *datarobot.models*), 318
 FeatureEffectMetadataDatetime (*class* in *datarobot.models*), 318
 FeatureEffectMetadataDatetimePerBacktest (*class* in *datarobot.models*), 319
 FeatureEffects (*class* in *datarobot.models*), 317
 FeatureFit (*class* in *datarobot.models*), 319
 FeatureFitMetadata (*class* in *datarobot.models*), 320
 FeatureFitMetadataDatetime (*class* in *datarobot.models*), 320
 FeatureFitMetadataDatetimePerBacktest (*class* in *datarobot.models*), 320
 FeatureHistogram (*class* in *datarobot.models*), 297
 FeatureImpactJob (*class* in *datarobot.models*), 330
 FeatureLineage (*class* in *datarobot.models*), 311
 Featurelist (*class* in *datarobot.models*), 321
 FeatureSettings (*class* in *datarobot*), 475
 find_anomalous_regions() (*datarobot.models.anomaly_assessment.AnomalyAssessmentPred*

- method*), 160
- ForecastVsActualPlot (*class in datarobot.models.datetime_trend_plots*), 259
- ForecastVsActualPlotPreview (*class in datarobot.models.datetime_trend_plots*), 260
- ForecastVsActualPlotsMetadata (*class in datarobot.models.datetime_trend_plots*), 258
- from_async() (*datarobot.models.Project class method*), 511
- from_data() (*datarobot.models.BlenderModel class method*), 381
- from_data() (*datarobot.models.Blueprint class method*), 175
- from_data() (*datarobot.models.Dataset class method*), 250
- from_data() (*datarobot.models.DatetimeModel class method*), 422
- from_data() (*datarobot.models.Deployment class method*), 280
- from_data() (*datarobot.models.Feature class method*), 293
- from_data() (*datarobot.models.Featurelist class method*), 322
- from_data() (*datarobot.models.Model class method*), 358
- from_data() (*datarobot.models.PayoffMatrix class method*), 488
- from_data() (*datarobot.models.PrimeModel class method*), 361
- from_data() (*datarobot.models.Project class method*), 547
- from_data() (*datarobot.models.RatingTableModel class method*), 442
- from_data() (*datarobot.models.segmentation.SegmentationTask class method*), 557
- from_data() (*datarobot.SegmentationTask class method*), 554
- from_job() (*datarobot.models.ModelJob class method*), 466
- from_job() (*datarobot.models.PredictJob class method*), 489
- from_server_data() (*datarobot.CustomModelVersion class method*), 208
- from_server_data() (*datarobot.CustomTask class method*), 220
- from_server_data() (*datarobot.CustomTaskVersion class method*), 224
- from_server_data() (*datarobot.DataSource class method*), 237
- from_server_data() (*datarobot.DataStore class method*), 234
- from_server_data() (*datarobot.models.Blueprint class method*), 175
- from_server_data() (*datarobot.models.Dataset class method*), 250
- from_server_data() (*datarobot.models.Deployment class method*), 280
- from_server_data() (*datarobot.models.Feature class method*), 293
- from_server_data() (*datarobot.models.FeatureEffects class method*), 318
- from_server_data() (*datarobot.models.FeatureFit class method*), 320
- from_server_data() (*datarobot.models.Featurelist class method*), 323
- from_server_data() (*datarobot.models.pareto_front.ParetoFront class method*), 468
- from_server_data() (*datarobot.models.PayoffMatrix class method*), 489
- from_server_data() (*datarobot.models.Project class method*), 547
- FrozenModel (*class in datarobot.models*), 436
- ## G
- generate() (*datarobot.DatetimePartitioning class method*), 480
- generate() (*datarobot.models.automated_documentation.AutomatedDocumentation class method*), 185
- generate_optimized() (*datarobot.DatetimePartitioning class method*), 481
- get() (*datarobot._experimental.models.retraining.RetainingPolicy class method*), 593
- get() (*datarobot.CalendarFile class method*), 180
- get() (*datarobot.CombinedModel class method*), 552
- get() (*datarobot.Connector class method*), 230
- get() (*datarobot.CustomInferenceModel class method*), 202
- get() (*datarobot.CustomModelTest class method*), 207
- get() (*datarobot.CustomModelVersion class method*), 210
- get() (*datarobot.CustomTask class method*), 221
- get() (*datarobot.CustomTaskVersion class method*), 226
- get() (*datarobot.DataDriver class method*), 228
- get() (*datarobot.DataEngineQueryGenerator class method*), 253
- get() (*datarobot.DatasetDetails class method*), 252
- get() (*datarobot.DatasetFeaturelist class method*), 321
- get() (*datarobot.DataSource class method*), 236
- get() (*datarobot.DataStore class method*), 232

- get () (*datarobot.DatetimePartitioning class method*), 481
- get () (*datarobot.ExecutionEnvironment class method*), 216
- get () (*datarobot.ExecutionEnvironmentVersion class method*), 218
- get () (*datarobot.ExternalLiftChart class method*), 288
- get () (*datarobot.ExternalRocCurve class method*), 289
- get () (*datarobot.ExternalScores class method*), 287
- get () (*datarobot.models.Accuracy class method*), 284
- get () (*datarobot.models.AccuracyOverTime class method*), 285
- get () (*datarobot.models.anomaly_assessment.AnomalyAssessmentExplanation class method*), 158
- get () (*datarobot.models.anomaly_assessment.AnomalyAssessmentPredictionsModelRecommendation class method*), 160
- get () (*datarobot.models.BatchPredictionJob class method*), 169
- get () (*datarobot.models.BatchPredictionJobDefinition class method*), 170
- get () (*datarobot.models.BlenderModel class method*), 380
- get () (*datarobot.models.Blueprint class method*), 175
- get () (*datarobot.models.BlueprintChart class method*), 176
- get () (*datarobot.models.compliance_doc_template.ComplianceDocTemplate class method*), 196
- get () (*datarobot.models.Credential class method*), 198
- get () (*datarobot.models.CustomModelVersionConversion class method*), 213
- get () (*datarobot.models.Dataset class method*), 243
- get () (*datarobot.models.DatasetFeatureHistogram class method*), 296
- get () (*datarobot.models.DatetimeModel class method*), 405
- get () (*datarobot.models.Deployment class method*), 266
- get () (*datarobot.models.Feature class method*), 291
- get () (*datarobot.models.FeatureAssociationFeaturelists class method*), 304
- get () (*datarobot.models.FeatureAssociationMatrix class method*), 302
- get () (*datarobot.models.FeatureAssociationMatrixDetails class method*), 303
- get () (*datarobot.models.FeatureHistogram class method*), 297
- get () (*datarobot.models.FeatureImpactJob class method*), 331
- get () (*datarobot.models.FeatureLineage class method*), 312
- get () (*datarobot.models.Featurelist class method*), 322
- get () (*datarobot.models.FrozenModel class method*), 438
- get () (*datarobot.models.ImportedModel class method*), 439
- get () (*datarobot.models.InteractionFeature class method*), 297
- get () (*datarobot.models.Job class method*), 326
- get () (*datarobot.models.missing_report.MissingValuesReport class method*), 333
- get () (*datarobot.models.Model class method*), 335
- get () (*datarobot.models.ModelBlueprintChart class method*), 177
- get () (*datarobot.models.ModelingFeature class method*), 295
- get () (*datarobot.models.ModelingFeaturelist class method*), 334
- get () (*datarobot.models.ModelJob class method*), 466
- get () (*datarobot.models.ModelsModelRecommendation class method*), 550
- get () (*datarobot.models.MulticategoricalHistogram class method*), 298
- get () (*datarobot.models.PairwiseConditionalProbabilities class method*), 301
- get () (*datarobot.models.PairwiseCorrelations class method*), 299
- get () (*datarobot.models.PairwiseJointProbabilities class method*), 299
- get () (*datarobot.models.PayoffMatrix class method*), 487
- get () (*datarobot.models.prediction_explanations.PredictionExplanations class method*), 500
- get () (*datarobot.models.PredictionDataset class method*), 493
- get () (*datarobot.models.Predictions class method*), 504
- get () (*datarobot.models.PredictJob class method*), 490
- get () (*datarobot.models.PrimeModel class method*), 359
- get () (*datarobot.models.Project class method*), 508
- get () (*datarobot.models.RatingTable class method*), 549
- get () (*datarobot.models.RatingTableModel class method*), 441
- get () (*datarobot.models.RelationshipsConfiguration method*), 307
- get () (*datarobot.models.SecondaryDatasetConfigurations method*), 315
- get () (*datarobot.models.segmentation.SegmentationTask class method*), 558
- get () (*datarobot.models.ServiceStats class method*), 280
- get () (*datarobot.models.ServiceStatsOverTime class method*), 281
- get () (*datarobot.models.ShapImpact class method*), 558
- get () (*datarobot.models.ShapMatrix class method*), 501
- get () (*datarobot.models.ShapMatrixJob class method*), 501

329
 get () (*datarobot.models.TargetDrift class method*), 282
 get () (*datarobot.models.training_predictions.TrainingPredictions class method*), 563
 get () (*datarobot.models.TrainingPredictionsJob class method*), 328
 get () (*datarobot.models.visualai.Image class method*), 572
 get () (*datarobot.models.visualai.ImageAugmentationOptions class method*), 575
 get () (*datarobot.PredictionExplanations class method*), 495
 get () (*datarobot.PredictionExplanationsInitialization class method*), 494
 get () (*datarobot.SegmentationTask class method*), 555
 get () (*datarobot.UserBlueprint class method*), 566
 get_access_list () (*datarobot.CalendarFile class method*), 183
 get_access_list () (*datarobot.CustomTask class method*), 223
 get_access_list () (*datarobot.DataSource class method*), 237
 get_access_list () (*datarobot.DataStore class method*), 234
 get_access_list () (*datarobot.models.Project class method*), 541
 get_accuracy () (*datarobot.models.Deployment class method*), 276
 get_accuracy_over_time () (*datarobot.models.Deployment class method*), 277
 get_accuracy_over_time_plot () (*datarobot.models.DatetimeModel class method*), 414
 get_accuracy_over_time_plot_preview () (*datarobot.models.DatetimeModel class method*), 415
 get_accuracy_over_time_plots_metadata () (*datarobot.models.DatetimeModel class method*), 414
 get_active_combined_model () (*datarobot.models.Project class method*), 535
 get_advanced_tuning_parameters () (*datarobot.models.BlenderModel class method*), 381
 get_advanced_tuning_parameters () (*datarobot.models.DatetimeModel class method*), 422
 get_advanced_tuning_parameters () (*datarobot.models.Model class method*), 354
 get_advanced_tuning_parameters () (*datarobot.models.PrimeModel class method*), 361
 get_advanced_tuning_parameters () (*datarobot.models.RatingTableModel class method*), 443
 get_all () (*datarobot.models.ModelRecommendation class method*), 550
 get_all_as_dataframe () (*datarobot.models.Predictions class method*), 504
 get_all_as_dataframe () (*datarobot.models.training_predictions.TrainingPredictions class method*), 563
 get_all_as_dataframe () (*datarobot.PredictionExplanations class method*), 497
 get_all_confusion_charts () (*datarobot.models.BlenderModel class method*), 383
 get_all_confusion_charts () (*datarobot.models.DatetimeModel class method*), 424
 get_all_confusion_charts () (*datarobot.models.Model class method*), 351
 get_all_confusion_charts () (*datarobot.models.PrimeModel class method*), 362
 get_all_confusion_charts () (*datarobot.models.RatingTableModel class method*), 444
 get_all_features () (*datarobot.models.Dataset class method*), 246
 get_all_jobs () (*datarobot.models.Project class method*), 534
 get_all_lift_charts () (*datarobot.models.BlenderModel class method*), 383
 get_all_lift_charts () (*datarobot.models.DatetimeModel class method*), 424
 get_all_lift_charts () (*datarobot.models.Model class method*), 349
 get_all_lift_charts () (*datarobot.models.PrimeModel class method*), 363
 get_all_lift_charts () (*datarobot.models.RatingTableModel class method*), 444
 get_all_multiclass_lift_charts () (*datarobot.models.BlenderModel class method*), 383
 get_all_multiclass_lift_charts () (*datarobot.models.DatetimeModel class method*), 425
 get_all_multiclass_lift_charts () (*datarobot.models.Model class method*), 349
 get_all_multiclass_lift_charts () (*datarobot.models.PrimeModel class method*), 361

(*datarobot.models.PrimeModel* *method*), 363
 get_all_multiclass_lift_charts() (*datarobot.models.RatingTableModel* *method*), 445
 get_all_residuals_charts() (*datarobot.models.BlenderModel* *method*), 384
 get_all_residuals_charts() (*datarobot.models.DatetimeModel* *method*), 425
 get_all_residuals_charts() (*datarobot.models.Model* *method*), 350
 get_all_residuals_charts() (*datarobot.models.PrimeModel* *method*), 363
 get_all_residuals_charts() (*datarobot.models.RatingTableModel* *method*), 445
 get_all_roc_curves() (*datarobot.models.BlenderModel* *method*), 384
 get_all_roc_curves() (*datarobot.models.DatetimeModel* *method*), 425
 get_all_roc_curves() (*datarobot.models.Model* *method*), 351
 get_all_roc_curves() (*datarobot.models.PrimeModel* *method*), 363
 get_all_roc_curves() (*datarobot.models.RatingTableModel* *method*), 445
 get_allowed_country_codes() (*datarobot.CalendarFile* *class* *method*), 180
 get_anomaly_assessment_records() (*datarobot.models.DatetimeModel* *method*), 420
 get_anomaly_over_time_plot() (*datarobot.models.DatetimeModel* *method*), 418
 get_anomaly_over_time_plot_preview() (*datarobot.models.DatetimeModel* *method*), 418
 get_anomaly_over_time_plots_metadata() (*datarobot.models.DatetimeModel* *method*), 417
 get_api_parameters() (*datarobot.models.ClassListMode* *method*), 502
 get_api_parameters() (*datarobot.models.TopPredictionsMode* *method*), 502
 get_as_dataframe() (*datarobot.models.AccuracyOverTime* *class* *method*), 285
 get_as_dataframe() (*datarobot.models.Dataset* *method*), 247
 get_as_dataframe() (*datarobot.models.ShapMatrix* *method*), 501
 get_association_featurelists() (*datarobot.models.Project* *method*), 525
 get_association_id_settings() (*datarobot.models.Deployment* *method*), 272
 get_association_matrix_details() (*datarobot.models.Project* *method*), 525
 get_associations() (*datarobot.models.Project* *method*), 524
 get_available_tasks() (*datarobot.UserBlueprint* *class* *method*), 569
 get_bias_mitigated_models() (*datarobot.models.Project* *method*), 545
 get_bias_mitigation_feature_info() (*datarobot.models.Project* *method*), 546
 get_blenders() (*datarobot.models.Project* *method*), 534
 get_blueprints() (*datarobot.models.Project* *method*), 524
 get_build_info() (*datarobot.CustomModelVersionDependencyBuild* *class* *method*), 214
 get_build_log() (*datarobot.ExecutionEnvironmentVersion* *method*), 219
 get_calculated_prediction_intervals() (*datarobot.models.DatetimeModel* *method*), 413
 get_challenger_models_settings() (*datarobot.models.Deployment* *method*), 271
 get_chart() (*datarobot.models.Blueprint* *method*), 175
 get_combined_models() (*datarobot.models.Project* *method*), 535
 get_confusion_chart() (*datarobot.models.BlenderModel* *method*), 384
 get_confusion_chart() (*datarobot.models.DatetimeModel* *method*), 425
 get_confusion_chart() (*datarobot.models.Model* *method*), 351
 get_confusion_chart() (*datarobot.models.PrimeModel* *method*), 364
 get_confusion_chart()

(*datarobot.models.RatingTableModel* method), 445
 get_cross_class_accuracy_scores() (*datarobot.models.BlenderModel* method), 384
 get_cross_class_accuracy_scores() (*datarobot.models.DatetimeModel* method), 426
 get_cross_class_accuracy_scores() (*datarobot.models.Model* method), 358
 get_cross_class_accuracy_scores() (*datarobot.models.PrimeModel* method), 364
 get_cross_class_accuracy_scores() (*datarobot.models.RatingTableModel* method), 446
 get_cross_series_properties() (*datarobot.models.Feature* method), 292
 get_cross_validation_scores() (*datarobot.models.BlenderModel* method), 385
 get_cross_validation_scores() (*datarobot.models.DatetimeModel* method), 406
 get_cross_validation_scores() (*datarobot.models.Model* method), 354
 get_cross_validation_scores() (*datarobot.models.PrimeModel* method), 364
 get_cross_validation_scores() (*datarobot.models.RatingTableModel* method), 446
 get_data_disparity_insights() (*datarobot.models.BlenderModel* method), 385
 get_data_disparity_insights() (*datarobot.models.DatetimeModel* method), 426
 get_data_disparity_insights() (*datarobot.models.Model* method), 357
 get_data_disparity_insights() (*datarobot.models.PrimeModel* method), 364
 get_data_disparity_insights() (*datarobot.models.RatingTableModel* method), 446
 get_dataset() (*datarobot.models.Project* method), 520
 get_datasets() (*datarobot.models.Project* method), 521
 get_datetime_models() (*datarobot.models.Project* method), 520
 get_default() (*datarobot.models.compliance_doc_template.ComplianceDocTemplate* class method), 195
 get_dependency_build() (*datarobot.CustomTaskVersion* method), 227
 get_details() (*datarobot.models.Dataset* method), 245
 get_discarded_features() (*datarobot.models.Project* method), 525
 get_document_page_with_text_locations() (*datarobot._experimental.models.documentai.document.Document* method), 592
 get_documents() (*datarobot.models.Blueprint* method), 175
 get_drift_tracking_settings() (*datarobot.models.Deployment* method), 272
 get_explanations() (*datarobot.models.anomaly_assessment.AnomalyAssessmentRecord* method), 157
 get_explanations_data_in_regions() (*datarobot.models.anomaly_assessment.AnomalyAssessmentRecord* method), 157
 get_fairness_insights() (*datarobot.models.BlenderModel* method), 385
 get_fairness_insights() (*datarobot.models.DatetimeModel* method), 426
 get_fairness_insights() (*datarobot.models.Model* method), 357
 get_fairness_insights() (*datarobot.models.PrimeModel* method), 365
 get_fairness_insights() (*datarobot.models.RatingTableModel* method), 446
 get_feature_drift() (*datarobot.models.Deployment* method), 276
 get_feature_effect() (*datarobot._experimental.models.model.DatetimeModel* method), 583
 get_feature_effect() (*datarobot._experimental.models.model.Model* method), 582
 get_feature_effect() (*datarobot.models.BlenderModel* method), 385
 get_feature_effect() (*datarobot.models.DatetimeModel* method), 409
 get_feature_effect() (*datarobot.models.Model* method), 343
 get_compliance_doc_template() (*datarobot.models.PrimeModel* method),

365
 get_feature_effect() (datarobot.models.RatingTableModel method), 447
 get_feature_effect_metadata() (datarobot.models.BlenderModel method), 386
 get_feature_effect_metadata() (datarobot.models.DatetimeModel method), 408
 get_feature_effect_metadata() (datarobot.models.Model method), 342
 get_feature_effect_metadata() (datarobot.models.PrimeModel method), 365
 get_feature_effect_metadata() (datarobot.models.RatingTableModel method), 447
 get_feature_effects_multiclass() (datarobot.models.BlenderModel method), 386
 get_feature_effects_multiclass() (datarobot.models.DatetimeModel method), 411
 get_feature_effects_multiclass() (datarobot.models.Model method), 344
 get_feature_effects_multiclass() (datarobot.models.PrimeModel method), 365
 get_feature_effects_multiclass() (datarobot.models.RatingTableModel method), 447
 get_feature_fit() (datarobot.models.BlenderModel method), 386
 get_feature_fit() (datarobot.models.DatetimeModel method), 412
 get_feature_fit() (datarobot.models.Model method), 345
 get_feature_fit() (datarobot.models.PrimeModel method), 366
 get_feature_fit() (datarobot.models.RatingTableModel method), 448
 get_feature_fit_metadata() (datarobot.models.BlenderModel method), 387
 get_feature_fit_metadata() (datarobot.models.DatetimeModel method), 409
 get_feature_fit_metadata() (datarobot.models.Model method), 342
 get_feature_fit_metadata() (datarobot.models.PrimeModel method), 366
 get_feature_fit_metadata() (datarobot.models.RatingTableModel method), 448
 get_feature_impact() (datarobot.CustomModelVersion method), 211
 get_feature_impact() (datarobot.models.BlenderModel method), 387
 get_feature_impact() (datarobot.models.DatetimeModel method), 420
 get_feature_impact() (datarobot.models.Model method), 340
 get_feature_impact() (datarobot.models.PrimeModel method), 366
 get_feature_impact() (datarobot.models.RatingTableModel method), 448
 get_featurelist_by_name() (datarobot.models.Project method), 527
 get_featurelists() (datarobot.models.Dataset method), 246
 get_featurelists() (datarobot.models.Project method), 524
 get_features() (datarobot.models.Deployment method), 268
 get_features() (datarobot.models.Project method), 524
 get_features_used() (datarobot.models.BlenderModel method), 388
 get_features_used() (datarobot.models.DatetimeModel method), 426
 get_features_used() (datarobot.models.Model method), 335
 get_features_used() (datarobot.models.PrimeModel method), 367
 get_features_used() (datarobot.models.RatingTableModel method), 449
 get_file() (datarobot.models.Dataset method), 247
 get_forecast_vs_actual_plot() (datarobot.models.DatetimeModel method), 416
 get_forecast_vs_actual_plot_preview() (datarobot.models.DatetimeModel method), 417
 get_forecast_vs_actual_plots_metadata()

(*datarobot.models.DatetimeModel* method), 415
 get_frozen_child_models() (*datarobot.models.BlenderModel* method), 388
 get_frozen_child_models() (*datarobot.models.DatetimeModel* method), 426
 get_frozen_child_models() (*datarobot.models.Model* method), 353
 get_frozen_child_models() (*datarobot.models.PrimeModel* method), 368
 get_frozen_child_models() (*datarobot.models.RatingTableModel* method), 449
 get_frozen_models() (*datarobot.models.Project* method), 534
 get_histogram() (*datarobot.models.DatasetFeature* method), 296
 get_histogram() (*datarobot.models.Feature* method), 293
 get_input_data() (*datarobot._experimental.helpers.partitioning_methods.DatetimePartitioning* class method), 581
 get_input_types() (*datarobot.UserBlueprint* class method), 568
 get_labelwise_roc_curves() (*datarobot.models.BlenderModel* method), 388
 get_labelwise_roc_curves() (*datarobot.models.DatetimeModel* method), 426
 get_labelwise_roc_curves() (*datarobot.models.Model* method), 352
 get_labelwise_roc_curves() (*datarobot.models.PrimeModel* method), 368
 get_labelwise_roc_curves() (*datarobot.models.RatingTableModel* method), 450
 get_latest() (*datarobot.models.CustomModelVersionConversion* class method), 213
 get_latest_explanations() (*datarobot.models.anomaly_assessment.AnomalyAssessment* method), 156
 get_leaderboard_ui_permalink() (*datarobot.models.BlenderModel* method), 389
 get_leaderboard_ui_permalink() (*datarobot.models.DatetimeModel* method), 427
 get_leaderboard_ui_permalink() (*datarobot.models.Model* method), 336
 get_leaderboard_ui_permalink() (*datarobot.models.PrimeModel* method), 368
 get_leaderboard_ui_permalink() (*datarobot.models.Project* method), 541
 get_leaderboard_ui_permalink() (*datarobot.models.RatingTableModel* method), 450
 get_lift_chart() (*datarobot.models.BlenderModel* method), 389
 get_lift_chart() (*datarobot.models.DatetimeModel* method), 427
 get_lift_chart() (*datarobot.models.Model* method), 348
 get_lift_chart() (*datarobot.models.PrimeModel* method), 368
 get_lift_chart() (*datarobot.models.RatingTableModel* method), 450
 get_log() (*datarobot.CustomModelTest* method), 207
 get_log() (*datarobot.CustomModelVersionDependencyBuild* method), 215
 get_log_tail() (*datarobot.CustomModelTest* method), 207
 get_partitioning_methods() (*datarobot._experimental.helpers.partitioning_methods.DatetimePartitioning* class method), 529
 get_missing_report_info() (*datarobot.models.BlenderModel* method), 389
 get_missing_report_info() (*datarobot.models.DatetimeModel* method), 427
 get_missing_report_info() (*datarobot.models.Model* method), 353
 get_missing_report_info() (*datarobot.models.PrimeModel* method), 368
 get_missing_report_info() (*datarobot.models.RatingTableModel* method), 450
 get_model() (*datarobot.models.ModelJob* class method), 467
 get_model() (*datarobot.models.ModelRecommendation* method), 550
 get_model_blueprint_chart() (*datarobot.models.BlenderModel* method), 389
 get_model_blueprint_chart() (*datarobot.models.DatetimeModel* method), 427
 get_model_blueprint_chart() (*datarobot.models.Model* method), 352
 get_model_blueprint_chart() (*datarobot.models.PrimeModel* method), 369
 get_model_blueprint_chart() (*datarobot.models.Project* method), 534

(*datarobot.models.RatingTableModel method*),
 450
 get_model_blueprint_documents()
 (*datarobot.models.BlenderModel method*),
 389
 get_model_blueprint_documents()
 (*datarobot.models.DatetimeModel method*),
 428
 get_model_blueprint_documents()
 (*datarobot.models.Model method*), 352
 get_model_blueprint_documents()
 (*datarobot.models.PrimeModel method*),
 369
 get_model_blueprint_documents()
 (*datarobot.models.RatingTableModel method*),
 451
 get_model_jobs() (*datarobot.models.Project
 method*), 535
 get_modeling_featurelists()
 (*datarobot.models.Project method*), 525
 get_modeling_features()
 (*datarobot.models.Project method*), 524
 get_models() (*datarobot.models.Project method*),
 518
 get_multicategorical_histogram()
 (*datarobot.models.Feature method*), 292
 get_multiclass_feature_impact()
 (*datarobot.models.BlenderModel method*),
 389
 get_multiclass_feature_impact()
 (*datarobot.models.DatetimeModel method*),
 428
 get_multiclass_feature_impact()
 (*datarobot.models.Model method*), 341
 get_multiclass_feature_impact()
 (*datarobot.models.PrimeModel method*),
 369
 get_multiclass_feature_impact()
 (*datarobot.models.RatingTableModel method*),
 451
 get_multiclass_lift_chart()
 (*datarobot.models.BlenderModel method*),
 390
 get_multiclass_lift_chart()
 (*datarobot.models.DatetimeModel method*),
 428
 get_multiclass_lift_chart()
 (*datarobot.models.Model method*), 349
 get_multiclass_lift_chart()
 (*datarobot.models.PrimeModel method*),
 369
 get_multiclass_lift_chart()
 (*datarobot.models.RatingTableModel method*),
 451
 get_multilabel_lift_charts()
 (*datarobot.models.BlenderModel method*),
 390
 get_multilabel_lift_charts()
 (*datarobot.models.DatetimeModel method*),
 428
 get_multilabel_lift_charts()
 (*datarobot.models.Model method*), 350
 get_multilabel_lift_charts()
 (*datarobot.models.PrimeModel method*),
 369
 get_multilabel_lift_charts()
 (*datarobot.models.RatingTableModel method*),
 451
 get_multiseries_names()
 (*datarobot.models.Project method*), 545
 get_multiseries_properties()
 (*datarobot.models.Feature method*), 291
 get_num_iterations_trained()
 (*datarobot.models.BlenderModel method*),
 390
 get_num_iterations_trained()
 (*datarobot.models.DatetimeModel method*),
 429
 get_num_iterations_trained()
 (*datarobot.models.Model method*), 336
 get_num_iterations_trained()
 (*datarobot.models.PrimeModel method*),
 370
 get_num_iterations_trained()
 (*datarobot.models.RatingTableModel method*),
 452
 get_number_of_explained_classes()
 (*datarobot.PredictionExplanations method*),
 497
 get_optimized() (*datarobot.DatetimePartitioning
 class method*), 481
 get_options() (*datarobot.models.Project method*),
 507
 get_or_request_feature_effect()
 (*datarobot.models.BlenderModel method*),
 391
 get_or_request_feature_effect()
 (*datarobot.models.DatetimeModel method*),
 410
 get_or_request_feature_effect()
 (*datarobot.models.Model method*), 345
 get_or_request_feature_effect()
 (*datarobot.models.PrimeModel method*),
 370
 get_or_request_feature_effect()
 (*datarobot.models.RatingTableModel method*),
 452
 get_or_request_feature_effects_multiclass()

(*datarobot.models.BlenderModel* method), 391
 get_or_request_feature_effects_multiclass() (*datarobot.models.DatetimeModel* method), 411
 get_or_request_feature_effects_multiclass(*datarobot.models.Model* method), 344
 get_or_request_feature_effects_multiclass(*datarobot.models.PrimeModel* method), 370
 get_or_request_feature_effects_multiclass(*datarobot.models.RatingTableModel* method), 452
 get_or_request_feature_fit() (*datarobot.models.BlenderModel* method), 391
 get_or_request_feature_fit() (*datarobot.models.DatetimeModel* method), 412
 get_or_request_feature_fit() (*datarobot.models.Model* method), 345
 get_or_request_feature_fit() (*datarobot.models.PrimeModel* method), 371
 get_or_request_feature_fit() (*datarobot.models.RatingTableModel* method), 453
 get_or_request_feature_impact() (*datarobot.models.BlenderModel* method), 391
 get_or_request_feature_impact() (*datarobot.models.DatetimeModel* method), 421
 get_or_request_feature_impact() (*datarobot.models.Model* method), 342
 get_or_request_feature_impact() (*datarobot.models.PrimeModel* method), 371
 get_or_request_feature_impact() (*datarobot.models.RatingTableModel* method), 453
 get_pairwise_conditional_probabilities() (*datarobot.models.Feature* method), 293
 get_pairwise_correlations() (*datarobot.models.Feature* method), 292
 get_pairwise_joint_probabilities() (*datarobot.models.Feature* method), 293
 get_parameter_names() (*datarobot.models.advanced_tuning.AdvancedTuningSession* method), 464
 get_parameters() (*datarobot.models.advanced_tuning.AdvancedTuningSession* method), 465
 get_parameters() (*datarobot.models.BlenderModel* method), 392
 get_parameters() (*datarobot.models.DatetimeModel* method), 429
 get_parameters() (*datarobot.models.Model* method), 348
 get_parameters() (*datarobot.models.PrimeModel* method), 371
 get_parameters() (*datarobot.models.RatingTableModel* method), 453
 get_pareto_front() (*datarobot.models.BlenderModel* method), 392
 get_pareto_front() (*datarobot.models.DatetimeModel* method), 429
 get_pareto_front() (*datarobot.models.Model* method), 350
 get_pareto_front() (*datarobot.models.PrimeModel* method), 371
 get_pareto_front() (*datarobot.models.RatingTableModel* method), 453
 get_predict_jobs() (*datarobot.models.Project* method), 535
 get_prediction_explanations_page() (*datarobot.PredictionExplanations* method), 498
 get_prediction_intervals_settings() (*datarobot.models.Deployment* method), 274
 get_prediction_results() (*datarobot.models.Deployment* method), 278
 get_prediction_warning_settings() (*datarobot.models.Deployment* method), 273
 get_predictions() (*datarobot.models.PredictJob* class method), 490
 get_predictions_by_forecast_date_settings() (*datarobot.models.Deployment* method), 270
 get_predictions_data_collection_settings() (*datarobot.models.Deployment* method), 273
 get_predictions_preview() (*datarobot.models.anomaly_assessment.AnomalyAssessmentRecord* method), 156
 get_prime_eligibility() (*datarobot.models.BlenderModel* method), 392
 get_prime_eligibility() (*datarobot.models.DatetimeModel* method), 429
 get_prime_eligibility() (*datarobot.models.Model* method), 346
 get_prime_eligibility() (*datarobot.models.PrimeModel* method), 371
 get_prime_eligibility()

(*datarobot.models.RatingTableModel method*),
 453
 get_prime_files() (*datarobot.models.Project
 method*), 520
 get_prime_models() (*datarobot.models.Project
 method*), 520
 get_projects() (*datarobot.models.Dataset
 method*), 247
 get_rating_table_models()
 (*datarobot.models.Project method*), 541
 get_rating_tables() (*datarobot.models.Project
 method*), 541
 get_recommendation()
 (*datarobot.models.ModelRecommendation
 class method*), 550
 get_relationships_configuration()
 (*datarobot.models.Project method*), 543
 get_residuals_chart()
 (*datarobot.models.BlenderModel method*),
 392
 get_residuals_chart()
 (*datarobot.models.DatetimeModel method*),
 429
 get_residuals_chart() (*datarobot.models.Model
 method*), 350
 get_residuals_chart()
 (*datarobot.models.PrimeModel method*),
 372
 get_residuals_chart()
 (*datarobot.models.RatingTableModel method*),
 453
 get_result() (*datarobot.models.FeatureImpactJob
 method*), 331
 get_result() (*datarobot.models.Job method*), 327
 get_result() (*datarobot.models.ModelJob method*),
 467
 get_result() (*datarobot.models.PredictJob
 method*), 491
 get_result() (*datarobot.models.ShapMatrixJob
 method*), 329
 get_result() (*datarobot.models.TrainingPredictionsJob
 method*), 328
 get_result_when_complete()
 (*datarobot.models.FeatureImpactJob method*),
 332
 get_result_when_complete()
 (*datarobot.models.Job method*), 327
 get_result_when_complete()
 (*datarobot.models.ModelJob method*), 467
 get_result_when_complete()
 (*datarobot.models.PredictJob method*), 491
 get_result_when_complete()
 (*datarobot.models.ShapMatrixJob method*),
 330
 get_result_when_complete()
 (*datarobot.models.TrainingPredictionsJob
 method*), 329
 get_roc_curve() (*datarobot.models.BlenderModel
 method*), 392
 get_roc_curve() (*datarobot.models.DatetimeModel
 method*), 429
 get_roc_curve() (*datarobot.models.Model
 method*), 351
 get_roc_curve() (*datarobot.models.PrimeModel
 method*), 372
 get_roc_curve() (*datarobot.models.RatingTableModel
 method*), 454
 get_rows() (*datarobot.PredictionExplanations
 method*), 496
 get_rulesets() (*datarobot.models.BlenderModel
 method*), 393
 get_rulesets() (*datarobot.models.DatetimeModel
 method*), 430
 get_rulesets() (*datarobot.models.Model method*),
 346
 get_rulesets() (*datarobot.models.PrimeModel
 method*), 372
 get_rulesets() (*datarobot.models.RatingTableModel
 method*), 454
 get_secondary_dataset_config()
 (*datarobot.models.Deployment method*),
 277
 get_segment_analysis_settings()
 (*datarobot.models.Deployment method*),
 271
 get_segments_as_csv()
 (*datarobot.CombinedModel method*), 553
 get_segments_as_dataframe()
 (*datarobot.CombinedModel method*), 553
 get_segments_info() (*datarobot.CombinedModel
 method*), 553
 get_segments_models()
 (*datarobot.models.Project method*), 535
 get_series_accuracy_as_dataframe()
 (*datarobot.models.DatetimeModel method*),
 406
 get_series_clusters()
 (*datarobot.models.DatetimeModel method*),
 407
 get_service_stats()
 (*datarobot.models.Deployment method*),
 275
 get_service_stats_over_time()
 (*datarobot.models.Deployment method*),
 275
 get_status() (*datarobot.models.BatchPredictionJob
 method*), 169
 get_status() (*datarobot.models.Project method*),

- 529
- `get_supported_capabilities()` (*datarobot.models.BlenderModel* method), 393
- `get_supported_capabilities()` (*datarobot.models.DatetimeModel* method), 430
- `get_supported_capabilities()` (*datarobot.models.Model* method), 336
- `get_supported_capabilities()` (*datarobot.models.PrimeModel* method), 372
- `get_supported_capabilities()` (*datarobot.models.RatingTableModel* method), 454
- `get_target_drift()` (*datarobot.models.Deployment* method), 276
- `get_task_names()` (*datarobot.models.advanced_tuning.AdvancedTuningSession* method), 464
- `get_top_model()` (*datarobot.models.Project* method), 519
- `get_uri()` (*datarobot.models.BlenderModel* method), 393
- `get_uri()` (*datarobot.models.Dataset* method), 240
- `get_uri()` (*datarobot.models.DatetimeModel* method), 430
- `get_uri()` (*datarobot.models.Deployment* method), 267
- `get_uri()` (*datarobot.models.Model* method), 336
- `get_uri()` (*datarobot.models.PrimeModel* method), 373
- `get_uri()` (*datarobot.models.Project* method), 540
- `get_uri()` (*datarobot.models.RatingTableModel* method), 455
- `get_word_cloud()` (*datarobot.models.BlenderModel* method), 393
- `get_word_cloud()` (*datarobot.models.DatetimeModel* method), 430
- `get_word_cloud()` (*datarobot.models.Model* method), 352
- `get_word_cloud()` (*datarobot.models.PrimeModel* method), 373
- `get_word_cloud()` (*datarobot.models.RatingTableModel* method), 455
- `GroupCV` (class in *datarobot*), 469
- `GroupTVH` (class in *datarobot*), 470
- I**
- `Image` (class in *datarobot.models.visualai*), 571
- `ImageActivationMap` (class in *datarobot.models.visualai*), 573
- `ImageAugmentationList` (class in *datarobot.models.visualai*), 575
- `ImageAugmentationOptions` (class in *datarobot.models.visualai*), 574
- `ImageAugmentationSample` (class in *datarobot.models.visualai*), 577
- `ImageEmbedding` (class in *datarobot.models.visualai*), 572
- `ImportedModel` (class in *datarobot.models*), 438
- `initialize_anomaly_assessment()` (*datarobot.models.DatetimeModel* method), 419
- `initialize_model_compliance()` (*datarobot.models.automated_documentation.AutomatedDocumentation* method), 185
- `insights` (*datarobot.models.ClusteringModel* attribute), 191
- `insights` (*datarobot.models.model.ClusteringModel* attribute), 72
- `InteractionFeature` (class in *datarobot.models*), 297
- `AdvancedTuningSession` (class in *datarobot.models.advanced_tuning*), 464
- `is_model_compliance_initialized` (*datarobot.models.automated_documentation.AutomatedDocumentation* attribute), 184
- `is_multiclass()` (*datarobot.PredictionExplanations* method), 496
- `is_unsupervised_clustering_or_multiclass()` (*datarobot.PredictionExplanations* method), 497
- `iterate()` (*datarobot.models.Dataset* class method), 244
- `iterate_all_features()` (*datarobot.models.Dataset* method), 246
- `iterate_rows()` (*datarobot.models.training_predictions.TrainingPredictions* method), 563
- J**
- `Job` (class in *datarobot.models*), 326
- L**
- `LabelwiseRocCurve` (class in *datarobot.models.roc_curve*), 551
- `LiftChart` (class in *datarobot.models.lift_chart*), 332
- `list()` (*datarobot._experimental.models.documentai.document.Documentation* class method), 590
- `list()` (*datarobot._experimental.models.documentai.document.Documentation* class method), 592
- `list()` (*datarobot._experimental.models.documentai.document.Documentation* class method), 585
- `list()` (*datarobot._experimental.models.retraining.RetrainingPolicy* class method), 592
- `list()` (*datarobot._experimental.models.retraining.RetrainingPolicyRun* class method), 594
- `list()` (*datarobot.CalendarFile* class method), 181
- `list()` (*datarobot.Connector* class method), 230

- `list()` (`datarobot.CustomInferenceModel` class method), 202
- `list()` (`datarobot.CustomModelTest` class method), 206
- `list()` (`datarobot.CustomModelVersion` class method), 210
- `list()` (`datarobot.CustomTask` class method), 220
- `list()` (`datarobot.CustomTaskVersion` class method), 226
- `list()` (`datarobot.DataDriver` class method), 228
- `list()` (`datarobot.DataSource` class method), 235
- `list()` (`datarobot.DataStore` class method), 232
- `list()` (`datarobot.ExecutionEnvironment` class method), 216
- `list()` (`datarobot.ExecutionEnvironmentVersion` class method), 218
- `list()` (`datarobot.ExternalLiftChart` class method), 288
- `list()` (`datarobot.ExternalRocCurve` class method), 289
- `list()` (`datarobot.ExternalScores` class method), 287
- `list()` (`datarobot.models.anomaly_assessment.AnomalyAssessment` class method), 156
- `list()` (`datarobot.models.BatchPredictionJobDefinition` class method), 170
- `list()` (`datarobot.models.cluster.Cluster` class method), 192
- `list()` (`datarobot.models.compliance_doc_template.ComplianceDocTemplate` class method), 196
- `list()` (`datarobot.models.Credential` class method), 197
- `list()` (`datarobot.models.CustomModelVersionConversion` class method), 214
- `list()` (`datarobot.models.Dataset` class method), 244
- `list()` (`datarobot.models.Deployment` class method), 265
- `list()` (`datarobot.models.FeatureDrift` class method), 283
- `list()` (`datarobot.models.ImportedModel` class method), 439
- `list()` (`datarobot.models.model.Cluster` class method), 73
- `list()` (`datarobot.models.PayoffMatrix` class method), 487
- `list()` (`datarobot.models.Predictions` class method), 504
- `list()` (`datarobot.models.Project` class method), 514
- `list()` (`datarobot.models.SecondaryDatasetConfigurations` class method), 315
- `list()` (`datarobot.models.segmentation.SegmentationTask` class method), 557
- `list()` (`datarobot.models.ShapMatrix` class method), 501
- `list()` (`datarobot.models.training_predictions.TrainingPredictions` class method), 334
- `list()` (`datarobot.models.visualai.DuplicateImage` class method), 572
- `list()` (`datarobot.models.visualai.ImageActivationMap` class method), 574
- `list()` (`datarobot.models.visualai.ImageAugmentationList` class method), 576
- `list()` (`datarobot.models.visualai.ImageAugmentationSample` class method), 578
- `list()` (`datarobot.models.visualai.ImageEmbedding` class method), 573
- `list()` (`datarobot.models.visualai.SampleImage` class method), 572
- `list()` (`datarobot.PredictionExplanations` class method), 496
- `list()` (`datarobot.PredictionServer` class method), 505
- `list()` (`datarobot.SegmentationTask` class method), 555
- `list()` (`datarobot.SegmentInfo` class method), 556
- `list()` (`datarobot.UserBlueprint` class method), 565
- `list_advanced_options()` (`datarobot.models.Project` method), 539
- `list_available_document_types()` (`datarobot.models.automated_documentation.AutomatedDocumentation` class method), 184
- `list_by_status()` (`datarobot.models.BatchPredictionJob` class method), 169
- `list_partition_spec()` (`datarobot.models.Project` method), 548
- `list_documents()` (`datarobot._experimental.models.documentai.document.Document` class method), 588
- `list_features_with_samples()` (`datarobot._experimental.models.documentai.document.Document` class method), 588
- `list_generated_documents()` (`datarobot.models.automated_documentation.AutomatedDocumentation` class method), 187
- `list_pages()` (`datarobot._experimental.models.documentai.document.Document` class method), 588
- `list_shared_roles()` (`datarobot.UserBlueprint` class method), 569

M

- `metric_baselines` (`datarobot.models.Accuracy` attribute), 284
- `metric_values` (`datarobot.models.Accuracy` attribute), 284
- `mime_type` (`datarobot._experimental.models.documentai.document.Document` attribute), 585
- `MissingValuesReport` (class in `datarobot.models.missing_report`), 333
- `Model` (class in `datarobot._experimental.models.model`), 581

- ModelBlueprintChart (class in *datarobot.models*), 177
- ModelingFeature (class in *datarobot.models*), 293
- ModelingFeatureList (class in *datarobot.models*), 323
- ModelJob (class in *datarobot.models*), 466
- ModelRecommendation (class in *datarobot.models*), 550
- models() (*datarobot.models.visualai.ImageActivationMap* class method), 574
- models() (*datarobot.models.visualai.ImageEmbedding* class method), 573
- modify() (*datarobot.models.Dataset* method), 244
- most_frequent() (*datarobot.models.word_cloud.WordCloud* method), 578
- most_important() (*datarobot.models.word_cloud.WordCloud* method), 578
- MulticategoricalHistogram (class in *datarobot.models*), 297
- ## N
- ngrams_per_class() (*datarobot.models.word_cloud.WordCloud* method), 579
- ## O
- open_in_browser() (*datarobot.models.BlenderModel* method), 394
- open_in_browser() (*datarobot.models.Dataset* method), 250
- open_in_browser() (*datarobot.models.DatetimeModel* method), 431
- open_in_browser() (*datarobot.models.Deployment* method), 280
- open_in_browser() (*datarobot.models.Model* method), 358
- open_in_browser() (*datarobot.models.PrimeModel* method), 373
- open_in_browser() (*datarobot.models.Project* method), 547
- open_in_browser() (*datarobot.models.RatingTableModel* method), 455
- open_in_browser() (*datarobot.rest.RESTClientObject* method), 190
- open_leaderboard_browser() (*datarobot.models.Project* method), 541
- open_model_browser() (*datarobot.models.BlenderModel* method), 394
- open_model_browser() (*datarobot.models.DatetimeModel* method), 431
- open_model_browser() (*datarobot.models.Model* method), 336
- open_model_browser() (*datarobot.models.PrimeModel* method), 373
- open_model_browser() (*datarobot.models.RatingTableModel* method), 455
- ## P
- PairwiseConditionalProbabilities (class in *datarobot.models*), 300
- PairwiseCorrelations (class in *datarobot.models*), 298
- PairwiseJointProbabilities (class in *datarobot.models*), 299
- ParetoFront (class in *datarobot.models.pareto_front*), 468
- pause_autopilot() (*datarobot.models.Project* method), 530
- PayoffMatrix (class in *datarobot.models*), 486
- percent_changes (*datarobot.models.Accuracy* attribute), 284
- Periodicity (class in *datarobot*), 476
- predict_batch() (*datarobot.models.Deployment* method), 266
- PredictionDataset (class in *datarobot.models*), 492
- PredictionExplanations (class in *datarobot*), 494
- PredictionExplanationsInitialization (class in *datarobot*), 494
- PredictionExplanationsPage (class in *datarobot.models.prediction_explanations*), 499
- PredictionExplanationsRow (class in *datarobot.models.prediction_explanations*), 498
- Predictions (class in *datarobot.models*), 502
- PredictionServer (class in *datarobot*), 505
- PredictJob (class in *datarobot.models*), 489
- prep_payload() (*datarobot._experimental.helpers.partitioning_method* method), 581
- prep_payload() (*datarobot.DatetimePartitioningSpecification* method), 474
- prepare_prediction_dataset() (*datarobot.DataEngineQueryGenerator* method), 254
- prepare_prediction_dataset_from_catalog() (*datarobot.DataEngineQueryGenerator* method), 254

PrimeFile (class in *datarobot.models*), 505
 PrimeModel (class in *datarobot.models*), 358
 Project (class in *datarobot.models*), 506

R

RandomCV (class in *datarobot*), 469
 RandomTVH (class in *datarobot*), 470
 RatingTable (class in *datarobot.models*), 548
 RatingTableModel (class in *datarobot.models*), 440
 recommended_model() (*datarobot.models.Project* method), 519
 refresh() (*datarobot.CustomInferenceModel* method), 205
 refresh() (*datarobot.CustomModelTest* method), 207
 refresh() (*datarobot.CustomModelVersion* method), 211
 refresh() (*datarobot.CustomModelVersionDependencyBuild* method), 215
 refresh() (*datarobot.CustomTask* method), 222
 refresh() (*datarobot.CustomTaskVersion* method), 227
 refresh() (*datarobot.ExecutionEnvironment* method), 217
 refresh() (*datarobot.ExecutionEnvironmentVersion* method), 219
 refresh() (*datarobot.models.FeatureImpactJob* method), 332
 refresh() (*datarobot.models.Job* method), 327
 refresh() (*datarobot.models.ModelJob* method), 468
 refresh() (*datarobot.models.PredictJob* method), 491
 refresh() (*datarobot.models.Project* method), 515
 refresh() (*datarobot.models.ShapMatrixJob* method), 329
 refresh() (*datarobot.models.TrainingPredictionsJob* method), 328
 Relationship (class in *datarobot.helpers.feature_discovery*), 310
 RelationshipsConfiguration (class in *datarobot.models*), 304
 rename() (*datarobot.models.Project* method), 536
 rename() (*datarobot.models.RatingTable* method), 549
 replace() (*datarobot.models.RelationshipsConfiguration* method), 308
 replace_model() (*datarobot.models.Deployment* method), 267
 request_approximation() (*datarobot.models.BlenderModel* method), 394
 request_approximation() (*datarobot.models.DatetimeModel* method), 431
 request_approximation() (*datarobot.models.Model* method), 346
 request_approximation() (*datarobot.models.RatingTableModel* method), 455
 request_bias_mitigation_feature_info() (*datarobot.models.Project* method), 546
 request_cross_class_accuracy_scores() (*datarobot.models.BlenderModel* method), 394
 request_cross_class_accuracy_scores() (*datarobot.models.DatetimeModel* method), 431
 request_cross_class_accuracy_scores() (*datarobot.models.Model* method), 357
 request_cross_class_accuracy_scores() (*datarobot.models.PrimeModel* method), 373
 request_cross_class_accuracy_scores() (*datarobot.models.RatingTableModel* method), 455
 request_data_disparity_insights() (*datarobot.models.BlenderModel* method), 394
 request_data_disparity_insights() (*datarobot.models.DatetimeModel* method), 431
 request_data_disparity_insights() (*datarobot.models.Model* method), 357
 request_data_disparity_insights() (*datarobot.models.PrimeModel* method), 373
 request_data_disparity_insights() (*datarobot.models.RatingTableModel* method), 455
 request_download_validation() (*datarobot.models.PrimeModel* method), 359
 request_external_test() (*datarobot.models.BlenderModel* method), 394
 request_external_test() (*datarobot.models.DatetimeModel* method), 431
 request_external_test() (*datarobot.models.Model* method), 342
 request_external_test() (*datarobot.models.PrimeModel* method), 373
 request_external_test() (*datarobot.models.RatingTableModel* method), 455
 request_fairness_insights() (*datarobot.models.BlenderModel* method), 394
 request_fairness_insights() (*datarobot.models.DatetimeModel* method), 432

`request_fairness_insights()`
 (*datarobot.models.Model* method), 357
`request_fairness_insights()`
 (*datarobot.models.PrimeModel* method),
 374
`request_fairness_insights()`
 (*datarobot.models.RatingTableModel* method),
 456
`request_feature_effect()`
 (*datarobot.models.BlenderModel* method),
 395
`request_feature_effect()`
 (*datarobot.models.DatetimeModel* method),
 409
`request_feature_effect()`
 (*datarobot.models.Model* method), 343
`request_feature_effect()`
 (*datarobot.models.PrimeModel* method),
 374
`request_feature_effect()`
 (*datarobot.models.RatingTableModel* method),
 456
`request_feature_effects_multiclass()`
 (*datarobot.models.BlenderModel* method), 395
`request_feature_effects_multiclass()`
 (*datarobot.models.DatetimeModel* method),
 410
`request_feature_effects_multiclass()`
 (*datarobot.models.Model* method), 343
`request_feature_effects_multiclass()`
 (*datarobot.models.PrimeModel* method), 374
`request_feature_effects_multiclass()`
 (*datarobot.models.RatingTableModel* method),
 456
`request_feature_fit()`
 (*datarobot.models.BlenderModel* method),
 395
`request_feature_fit()`
 (*datarobot.models.DatetimeModel* method),
 411
`request_feature_fit()` (*datarobot.models.Model*
 method), 345
`request_feature_fit()`
 (*datarobot.models.PrimeModel* method),
 374
`request_feature_fit()`
 (*datarobot.models.RatingTableModel* method),
 457
`request_feature_impact()`
 (*datarobot.models.BlenderModel* method),
 395
`request_feature_impact()`
 (*datarobot.models.DatetimeModel* method),
 421
`request_feature_impact()`
 (*datarobot.models.Model* method), 341
`request_feature_impact()`
 (*datarobot.models.PrimeModel* method),
 375
`request_feature_impact()`
 (*datarobot.models.RatingTableModel* method),
 457
`request_frozen_datetime_model()`
 (*datarobot.CombinedModel* method), 553
`request_frozen_datetime_model()`
 (*datarobot.models.BlenderModel* method),
 396
`request_frozen_datetime_model()`
 (*datarobot.models.DatetimeModel* method),
 432
`request_frozen_datetime_model()`
 (*datarobot.models.Model* method), 347
`request_frozen_datetime_model()`
 (*datarobot.models.RatingTableModel* method),
 457
`request_frozen_model()`
 (*datarobot.CombinedModel* method), 553
`request_frozen_model()`
 (*datarobot.models.BlenderModel* method),
 397
`request_frozen_model()`
 (*datarobot.models.Model* method), 347
`request_frozen_model()`
 (*datarobot.models.RatingTableModel* method),
 458
`request_model()` (*datarobot.models.Ruleset*
 method), 552
`request_predictions()`
 (*datarobot.models.BlenderModel* method),
 397
`request_predictions()`
 (*datarobot.models.DatetimeModel* method),
 433
`request_predictions()` (*datarobot.models.Model*
 method), 339
`request_predictions()`
 (*datarobot.models.PrimeModel* method),
 375
`request_predictions()`
 (*datarobot.models.RatingTableModel* method),
 458
`request_training_predictions()`
 (*datarobot.models.BlenderModel* method),
 398
`request_training_predictions()`
 (*datarobot.models.DatetimeModel* method),
 406
`request_training_predictions()`

- (*datarobot.models.Model* method), 353
 request_training_predictions() (*datarobot.models.PrimeModel* method), 376
 request_training_predictions() (*datarobot.models.RatingTableModel* method), 460
 request_transferable_export() (*datarobot.models.BlenderModel* method), 399
 request_transferable_export() (*datarobot.models.DatetimeModel* method), 434
 request_transferable_export() (*datarobot.models.Model* method), 346
 request_transferable_export() (*datarobot.models.PrimeModel* method), 377
 request_transferable_export() (*datarobot.models.RatingTableModel* method), 460
 RequiredMetadataKey (class in *datarobot.models.execution_environment*), 212
 restart_segment() (*datarobot.models.Project* method), 545
 RESTClientObject (class in *datarobot.rest*), 190
 restore() (*datarobot.models.restore_discarded_features.DiscardedFeaturesInfo* class method), 325
 restore_discarded_features() (*datarobot.models.Project* method), 526
 retrain() (*datarobot.CombinedModel* method), 553
 retrain() (*datarobot.models.BlenderModel* method), 400
 retrain() (*datarobot.models.DatetimeModel* method), 408
 retrain() (*datarobot.models.Model* method), 339
 retrain() (*datarobot.models.PrimeModel* method), 377
 retrain() (*datarobot.models.RatingTableModel* method), 461
 RetrainingPolicy (class in *datarobot._experimental.models.retraining*), 592
 RetrainingPolicyRun (class in *datarobot._experimental.models.retraining*), 594
 retrieve() (*datarobot.models.restore_discarded_features.DiscardedFeaturesInfo* class method), 326
 retrieve_samples() (*datarobot.models.visualai.ImageAugmentationList* method), 577
 RocCurve (class in *datarobot.models.roc_curve*), 551
 Ruleset (class in *datarobot.models*), 551
 run() (*datarobot.models.advanced_tuning.AdvancedTuningSession* method), 465
 run_conversion() (*datarobot.models.CustomModelVersionConversion* class method), 212
 run_on_schedule() (*datarobot.models.BatchPredictionJobDefinition* method), 173
 run_once() (*datarobot.models.BatchPredictionJobDefinition* method), 174
- ## S
- SampleImage (class in *datarobot.models.visualai*), 572
 schemas() (*datarobot.DataStore* method), 233
 score() (*datarobot.models.BatchPredictionJob* class method), 160
 score_azure() (*datarobot.models.BatchPredictionJob* class method), 167
 score_backtests() (*datarobot.models.DatetimeModel* method), 406
 score_from_existing() (*datarobot.models.BatchPredictionJob* class method), 168
 score_gcp() (*datarobot.models.BatchPredictionJob* class method), 168
 score_pandas() (*datarobot.models.BatchPredictionJob* class method), 168
 score_to_file() (*datarobot.models.BatchPredictionJob* class method), 165
 search_catalog() (*datarobot.UserBlueprint* class method), 571
 SecondaryDataset (class in *datarobot.helpers.feature_discovery*), 316
 SecondaryDatasetConfigurations (class in *datarobot.models*), 313
 sections_to_json_file() (*datarobot.models.compliance_doc_template.ComplianceDocTemplate* method), 196
 SegmentationTask (class in *datarobot*), 554
 SegmentationTask (class in *datarobot.models.segmentation*), 556
 SegmentInfo (class in *datarobot*), 555
 ServiceStats (class in *datarobot.models*), 280
 ServiceStatsOverTime (class in *datarobot.models*), 281
 set_advanced_options() (*datarobot.models.Project* method), 537
 set_client() (in module *datarobot.client*), 189
 set_datetime_partitioning() (*datarobot.models.Project* method), 547
 set_options() (*datarobot.models.Project* method), 507

set_parameter() (*datarobot.models.advanced_tuning.AdvancedTuningSession* method), 464
 set_partitioning_method() (*datarobot.models.Project* method), 539
 set_prediction_threshold() (*datarobot.models.BlenderModel* method), 400
 set_prediction_threshold() (*datarobot.models.DatetimeModel* method), 435
 set_prediction_threshold() (*datarobot.models.Model* method), 356
 set_prediction_threshold() (*datarobot.models.PrimeModel* method), 378
 set_prediction_threshold() (*datarobot.models.RatingTableModel* method), 461
 set_project_description() (*datarobot.models.Project* method), 536
 set_segment_champion() (*datarobot.CombinedModel* class method), 552
 set_target() (*datarobot.models.Project* method), 516
 set_worker_count() (*datarobot.models.Project* method), 536
 ShapImpact (class in *datarobot.models*), 558
 ShapMatrix (class in *datarobot.models*), 500
 ShapMatrixJob (class in *datarobot.models*), 329
 share() (*datarobot.CalendarFile* class method), 182
 share() (*datarobot.CustomTask* method), 223
 share() (*datarobot.DataSource* method), 237
 share() (*datarobot.DataStore* method), 235
 share() (*datarobot.models.Dataset* method), 245
 share() (*datarobot.models.Project* method), 541
 SharingAccess (class in *datarobot*), 559
 Solution (class in *datarobot.models.pareto_front*), 469
 star_model() (*datarobot.models.BlenderModel* method), 400
 star_model() (*datarobot.models.DatetimeModel* method), 435
 star_model() (*datarobot.models.Model* method), 356
 star_model() (*datarobot.models.PrimeModel* method), 378
 star_model() (*datarobot.models.RatingTableModel* method), 461
 start() (*datarobot.models.Project* class method), 511
 start_advanced_tuning_session() (*datarobot.models.BlenderModel* method), 400
 start_advanced_tuning_session() (*datarobot.models.DatetimeModel* method), 435
 start_advanced_tuning_session() (*datarobot.models.Model* method), 356
 start_advanced_tuning_session() (*datarobot.models.PrimeModel* method), 378
 start_advanced_tuning_session() (*datarobot.models.RatingTableModel* method), 461
 start_autopilot() (*datarobot.models.Project* method), 530
 start_build() (*datarobot.CustomModelVersionDependencyBuild* class method), 214
 start_dependency_build() (*datarobot.CustomTaskVersion* method), 227
 start_dependency_build_and_wait() (*datarobot.CustomTaskVersion* method), 227
 start_prepare_model_for_deployment() (*datarobot.models.Project* method), 534
 stop_conversion() (*datarobot.models.CustomModelVersionConversion* class method), 213
 StratifiedCV (class in *datarobot*), 469
 StratifiedTVH (class in *datarobot*), 470
 submit_actuals() (*datarobot.models.Deployment* method), 269

T

tables() (*datarobot.DataStore* method), 234
 TargetDrift (class in *datarobot.models*), 282
 test() (*datarobot.DataStore* method), 233
 thumbnail_bytes (*datarobot._experimental.models.documentai.documentai* attribute), 585
 to_dataframe() (*datarobot.DatetimePartitioning* method), 483
 to_dataframe() (*datarobot.helpers.partitioning_methods.Backtest* method), 486
 to_dataframe() (*datarobot.models.MulticategoricalHistogram* method), 298
 to_dataset() (*datarobot.DatasetDetails* method), 252
 to_graphviz() (*datarobot.models.BlueprintChart* method), 176
 to_graphviz() (*datarobot.models.ModelBlueprintChart* method), 177
 to_specification() (*datarobot.DatetimePartitioning* method), 483
 to_specification() (*datarobot.helpers.partitioning_methods.Backtest* method), 485

TopPredictionsMode (class in *datarobot.models*), 502
 train() (*datarobot.CombinedModel* method), 553
 train() (*datarobot.models.BlenderModel* method), 400
 train() (*datarobot.models.Model* method), 337
 train() (*datarobot.models.Project* method), 531
 train() (*datarobot.models.RatingTableModel* method), 462
 train_datetime() (*datarobot.CombinedModel* method), 553
 train_datetime() (*datarobot.models.BlenderModel* method), 401
 train_datetime() (*datarobot.models.DatetimeModel* method), 435
 train_datetime() (*datarobot.models.Model* method), 338
 train_datetime() (*datarobot.models.Project* method), 532
 train_datetime() (*datarobot.models.RatingTableModel* method), 463
 TrainingPredictions (class in *datarobot.models.training_predictions*), 561
 TrainingPredictionsIterator (class in *datarobot.models.training_predictions*), 559
 TrainingPredictionsJob (class in *datarobot.models*), 328

U

un_delete() (*datarobot.models.Dataset* class method), 243
 unlock_holdout() (*datarobot.models.Project* method), 536
 unpause_autopilot() (*datarobot.models.Project* method), 530
 unstar_model() (*datarobot.models.BlenderModel* method), 402
 unstar_model() (*datarobot.models.DatetimeModel* method), 436
 unstar_model() (*datarobot.models.Model* method), 356
 unstar_model() (*datarobot.models.PrimeModel* method), 378
 unstar_model() (*datarobot.models.RatingTableModel* method), 464
 update() (*datarobot._experimental.helpers.partitioning_methods.DatetimePartitioning* method), 581
 update() (*datarobot.Connector* method), 231
 update() (*datarobot.CustomInferenceModel* method), 204
 update() (*datarobot.CustomModelVersion* method), 211
 update() (*datarobot.CustomTask* method), 222
 update() (*datarobot.CustomTaskVersion* method), 226
 update() (*datarobot.DataDriver* method), 229
 update() (*datarobot.DatasetFeaturelist* method), 321
 update() (*datarobot.DataSource* method), 237
 update() (*datarobot.DataStore* method), 233
 update() (*datarobot.DatetimePartitioningSpecification* method), 474
 update() (*datarobot.ExecutionEnvironment* method), 217
 update() (*datarobot.models.BatchPredictionJobDefinition* method), 172
 update() (*datarobot.models.compliance_doc_template.ComplianceDocTemplate* method), 196
 update() (*datarobot.models.Dataset* method), 244
 update() (*datarobot.models.Deployment* method), 267
 update() (*datarobot.models.Featurelist* method), 323
 update() (*datarobot.models.ImportedModel* method), 439
 update() (*datarobot.models.ModelingFeaturelist* method), 325
 update() (*datarobot.models.PayoffMatrix* class method), 488
 update() (*datarobot.models.visualai.ImageAugmentationList* method), 576
 update() (*datarobot.UserBlueprint* class method), 568
 update_association_id_settings() (*datarobot.models.Deployment* method), 273
 update_challenger_models_settings() (*datarobot.models.Deployment* method), 271
 update_cluster_name() (*datarobot.models.ClusteringModel* method), 192
 update_cluster_name() (*datarobot.models.model.ClusteringModel* method), 73
 update_cluster_names() (*datarobot.models.ClusteringModel* method), 192
 update_cluster_names() (*datarobot.models.model.ClusteringModel* method), 73
 update_drift_tracking_settings() (*datarobot.models.Deployment* method), 272
 update_individual_options() (*datarobot.helpers.AdvancedOptions* method), 154
 update_multiple_names() (*datarobot.models.cluster.Cluster* class method), 192
 update_multiple_names() (*datarobot.models.model.Cluster* class method), 74
 update_name() (*datarobot.CalendarFile* class

method), 182
 update_name() (*datarobot.models.cluster.Cluster class method*), 193
 update_name() (*datarobot.models.model.Cluster class method*), 74
 update_prediction_intervals_settings() (*datarobot.models.Deployment method*), 274
 update_prediction_warning_settings() (*datarobot.models.Deployment method*), 274
 update_predictions_by_forecast_date_settings() (*datarobot.models.Deployment method*), 270
 update_predictions_data_collection_settings() (*datarobot.models.Deployment method*), 273
 update_secondary_dataset_config() (*datarobot.models.Deployment method*), 277
 update_segment_analysis_settings() (*datarobot.models.Deployment method*), 271
 update_shared_roles() (*datarobot.UserBlueprint class method*), 570
 upload() (*datarobot.models.Dataset class method*), 240
 upload_dataset() (*datarobot.models.Project method*), 521
 upload_dataset_from_catalog() (*datarobot.models.Project method*), 523
 upload_dataset_from_data_source() (*datarobot.models.Project method*), 522
 UserBlueprint (*class in datarobot*), 564
 UserCV (*class in datarobot*), 470
 UserTVH (*class in datarobot*), 470

V

validate_blueprint() (*datarobot.UserBlueprint class method*), 570
 validate_external_time_series_baseline() (*datarobot.models.Project method*), 544
 validate_replacement_model() (*datarobot.models.Deployment method*), 268
 validate_task_parameters() (*datarobot.UserBlueprint class method*), 569

W

wait_for_async_model_creation() (*in module datarobot.models.modeljob*), 465
 wait_for_async_predictions() (*in module datarobot.models.predict_job*), 489
 wait_for_autopilot() (*datarobot.models.Project method*), 536
 wait_for_completion() (*datarobot.models.FeatureImpactJob method*), 332
 wait_for_completion() (*datarobot.models.Job method*), 327
 wait_for_completion() (*datarobot.models.ModelJob method*), 468
 wait_for_completion() (*datarobot.models.PredictJob method*), 491
 wait_for_completion() (*datarobot.models.ShapMatrixJob method*), 330
 wait_for_completion() (*datarobot.models.TrainingPredictionsJob method*), 329
 WordCloud (*class in datarobot.models.word_cloud*), 578